

# International **IR** Rectifier

PD - 95335D

## IRF7413ZPbF

HEXFET® Power MOSFET


### Applications

- Control FET for Notebook Processor Power
- Control and Synchronous Rectifier MOSFET for Graphics Cards and POL Converters in Computing, Networking and Telecommunication Systems

| $V_{DS}$ | $R_{DS(on)}$ max      | $I_D$ |
|----------|-----------------------|-------|
| 30V      | 10mΩ @ $V_{GS} = 10V$ | 13A   |

### Benefits

- Ultra-Low Gate Impedance
- Very Low  $R_{DS(on)}$
- Fully Characterized Avalanche Voltage and Current
- 100% Tested for  $R_G$
- Lead-Free



### Absolute Maximum Ratings

|                                  | Parameter                                           | Max.         | Units |
|----------------------------------|-----------------------------------------------------|--------------|-------|
| $V_{DS}$                         | Drain-to-Source Voltage                             | 30           | V     |
| $V_{GS}$                         | Gate-to-Source Voltage                              | ± 20         |       |
| $I_D$ @ $T_A = 25^\circ\text{C}$ | Continuous Drain Current, $V_{GS}$ @ 10V            | 13           | A     |
| $I_D$ @ $T_A = 70^\circ\text{C}$ | Continuous Drain Current, $V_{GS}$ @ 10V            | 10           |       |
| $I_{DM}$                         | Pulsed Drain Current ①                              | 100          |       |
| $P_D$ @ $T_A = 25^\circ\text{C}$ | Power Dissipation                                   | 2.5          | W     |
| $P_D$ @ $T_A = 70^\circ\text{C}$ | Power Dissipation                                   | 1.6          |       |
|                                  | Linear Derating Factor                              | 0.02         | W/°C  |
| $T_J$<br>$T_{STG}$               | Operating Junction and<br>Storage Temperature Range | -55 to + 150 | °C    |

### Thermal Resistance

|                 | Parameter              | Typ. | Max. | Units |
|-----------------|------------------------|------|------|-------|
| $R_{\theta JL}$ | Junction-to-Drain Lead | —    | 20   | °C/W  |
| $R_{\theta JA}$ | Junction-to-Ambient ④  | —    | 50   |       |

Notes ① through ④ are on page 10

[www.irf.com](http://www.irf.com)

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

# IRF7413ZPbF

International  
**IR** Rectifier

Static @  $T_J = 25^\circ\text{C}$  (unless otherwise specified)

|                                | Parameter                                  | Min. | Typ.  | Max. | Units                | Conditions                                                             |
|--------------------------------|--------------------------------------------|------|-------|------|----------------------|------------------------------------------------------------------------|
| $BV_{DSS}$                     | Drain-to-Source Breakdown Voltage          | 30   | —     | —    | V                    | $V_{GS} = 0V, I_D = 250\mu A$                                          |
| $\Delta BV_{DSS}/\Delta T_J$   | Breakdown Voltage Temp. Coefficient        | —    | 0.025 | —    | V/ $^\circ\text{C}$  | Reference to $25^\circ\text{C}$ , $I_D = 1\text{mA}$                   |
| $R_{DS(on)}$                   | Static Drain-to-Source On-Resistance       | —    | 8.0   | 10   | $m\Omega$            | $V_{GS} = 10V, I_D = 13A$ ③                                            |
|                                |                                            | —    | 10.5  | 13   |                      | $V_{GS} = 4.5V, I_D = 10A$ ③                                           |
| $V_{GS(th)}$                   | Gate Threshold Voltage                     | 1.35 | 1.80  | 2.25 | V                    | $V_{DS} = V_{GS}, I_D = 25\mu A$                                       |
| $\Delta V_{GS(th)}/\Delta T_J$ | Gate Threshold Voltage Coefficient         | —    | -5.0  | —    | mV/ $^\circ\text{C}$ |                                                                        |
| $I_{DSS}$                      | Drain-to-Source Leakage Current            | —    | —     | 1.0  | $\mu A$              | $V_{DS} = 24V, V_{GS} = 0V$                                            |
|                                |                                            | —    | —     | 150  |                      | $V_{DS} = 24V, V_{GS} = 0V, T_J = 125^\circ\text{C}$                   |
| $I_{GSS}$                      | Gate-to-Source Forward Leakage             | —    | —     | 100  | nA                   | $V_{GS} = 20V$                                                         |
|                                | Gate-to-Source Reverse Leakage             | —    | —     | -100 |                      | $V_{GS} = -20V$                                                        |
| $g_{fs}$                       | Forward Transconductance                   | 62   | —     | —    | S                    | $V_{DS} = 15V, I_D = 10A$                                              |
| $Q_g$                          | Total Gate Charge                          | —    | 9.5   | 14   | nC                   | $V_{DS} = 15V$<br>$V_{GS} = 4.5V$<br>$I_D = 10A$<br>See Fig. 16        |
| $Q_{gs1}$                      | Pre-V <sub>th</sub> Gate-to-Source Charge  | —    | 3.0   | —    |                      |                                                                        |
| $Q_{gs2}$                      | Post-V <sub>th</sub> Gate-to-Source Charge | —    | 1.0   | —    |                      |                                                                        |
| $Q_{gd}$                       | Gate-to-Drain Charge                       | —    | 3.0   | —    |                      |                                                                        |
| $Q_{godr}$                     | Gate Charge Overdrive                      | —    | 2.5   | —    |                      |                                                                        |
| $Q_{sw}$                       | Switch Charge ( $Q_{gs2} + Q_{gd}$ )       | —    | 4.0   | —    |                      |                                                                        |
| $Q_{oss}$                      | Output Charge                              | —    | 5.6   | —    | nC                   | $V_{DS} = 15V, V_{GS} = 0V$                                            |
| $R_G$                          | Gate Resistance                            | —    | 2.3   | 4.5  | $\Omega$             |                                                                        |
| $t_{d(on)}$                    | Turn-On Delay Time                         | —    | 8.7   | —    | ns                   | $V_{DD} = 16V, V_{GS} = 4.5V$<br>$I_D = 10A$<br>Clamped Inductive Load |
| $t_r$                          | Rise Time                                  | —    | 6.3   | —    |                      |                                                                        |
| $t_{d(off)}$                   | Turn-Off Delay Time                        | —    | 11    | —    |                      |                                                                        |
| $t_f$                          | Fall Time                                  | —    | 3.8   | —    |                      |                                                                        |
| $C_{iss}$                      | Input Capacitance                          | —    | 1210  | —    | pF                   | $V_{GS} = 0V$<br>$V_{DS} = 15V$<br>$f = 1.0\text{MHz}$                 |
| $C_{oss}$                      | Output Capacitance                         | —    | 270   | —    |                      |                                                                        |
| $C_{rss}$                      | Reverse Transfer Capacitance               | —    | 140   | —    |                      |                                                                        |

## Avalanche Characteristics


|          | Parameter                       | Typ. | Max. | Units |
|----------|---------------------------------|------|------|-------|
| $E_{AS}$ | Single Pulse Avalanche Energy ② | —    | 32   | mJ    |
| $I_{AR}$ | Avalanche Current ①             | —    | 10   | A     |

## Diode Characteristics


|          | Parameter                                 | Min.                                                                 | Typ. | Max. | Units | Conditions                                                              |
|----------|-------------------------------------------|----------------------------------------------------------------------|------|------|-------|-------------------------------------------------------------------------|
| $I_S$    | Continuous Source Current<br>(Body Diode) | —                                                                    | —    | 3.1  | A     | MOSFET symbol<br>showing the<br>integral reverse<br>p-n junction diode. |
| $I_{SM}$ | Pulsed Source Current<br>(Body Diode) ①   | —                                                                    | —    | 100  |       |                                                                         |
| $V_{SD}$ | Diode Forward Voltage                     | —                                                                    | —    | 1.0  | V     | $T_J = 25^\circ\text{C}, I_S = 10A, V_{GS} = 0V$ ③                      |
| $t_{rr}$ | Reverse Recovery Time                     | —                                                                    | 24   | 36   | ns    | $T_J = 25^\circ\text{C}, I_F = 10A, V_{DD} = 15V$                       |
| $Q_{rr}$ | Reverse Recovery Charge                   | —                                                                    | 16   | 24   | nC    | $di/dt = 100A/\mu s$ ③                                                  |
| $t_{on}$ | Forward Turn-On Time                      | Intrinsic turn-on time is negligible (turn-on is dominated by LS+LD) |      |      |       |                                                                         |

International  
**IR** Rectifier


# IRF7413ZPbF

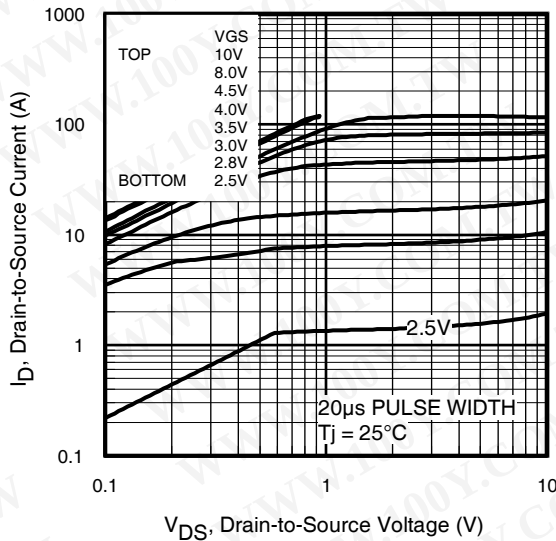


**Fig 1.** Typical Output Characteristics

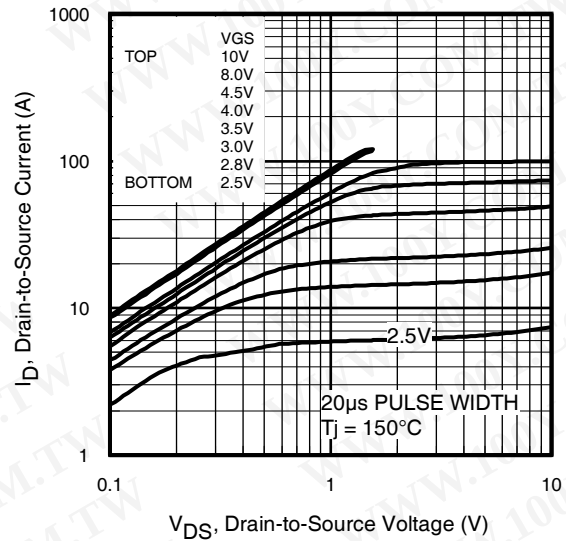

**Fig 2.** Typical Output Characteristics

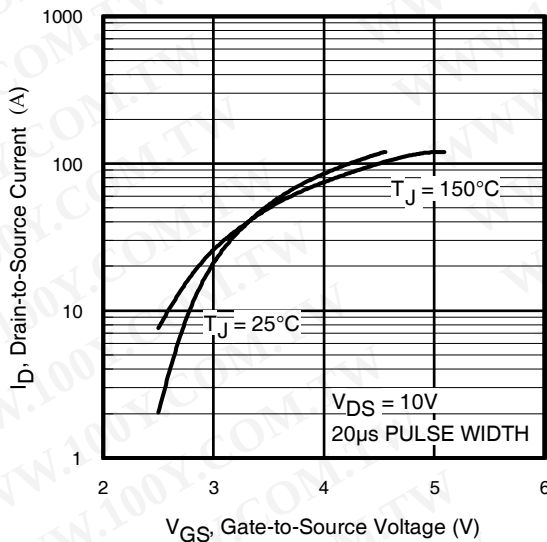

**Fig 3.** Typical Transfer Characteristics




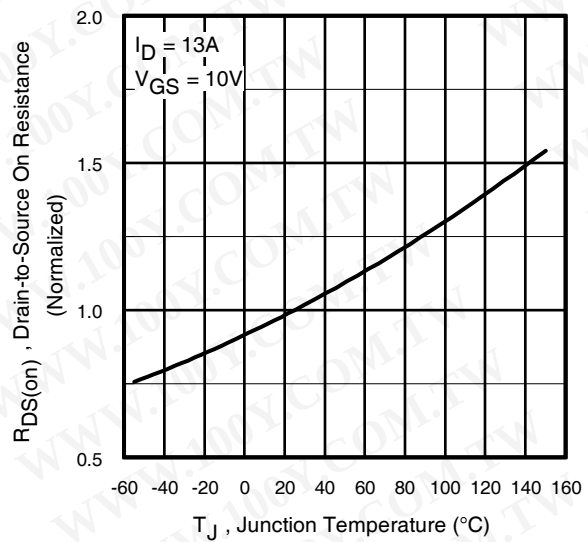


**Fig 4.** Normalized On-Resistance vs. Temperature

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

# IRF7413ZPbF


International  
**IR** Rectifier

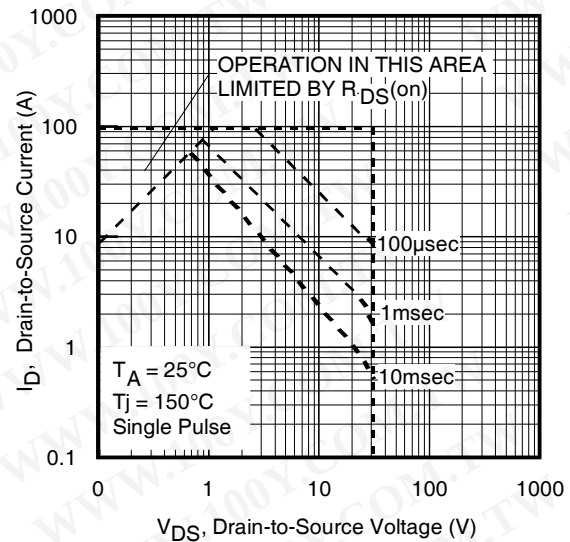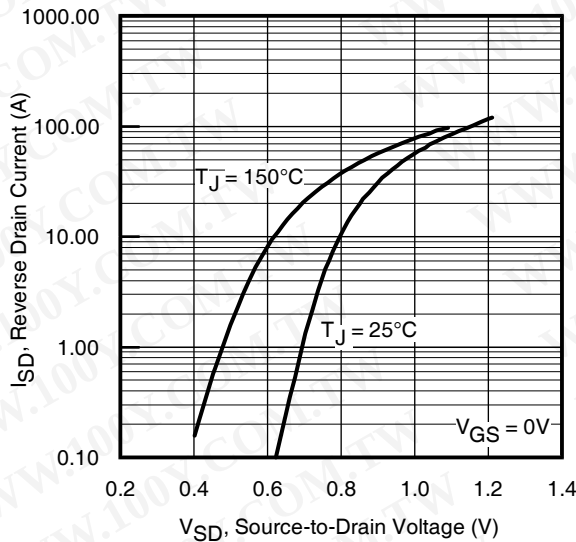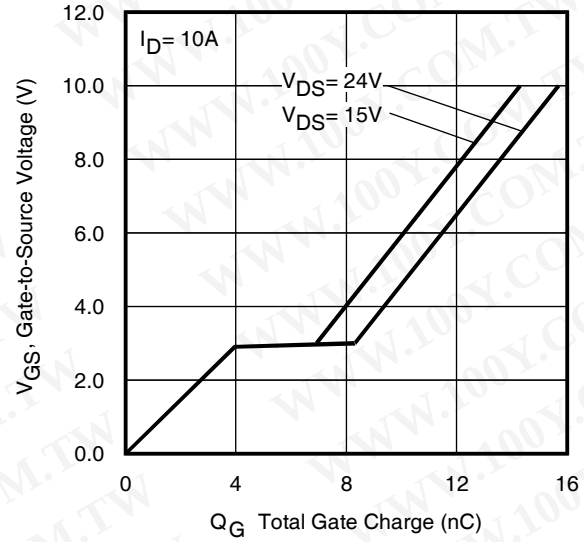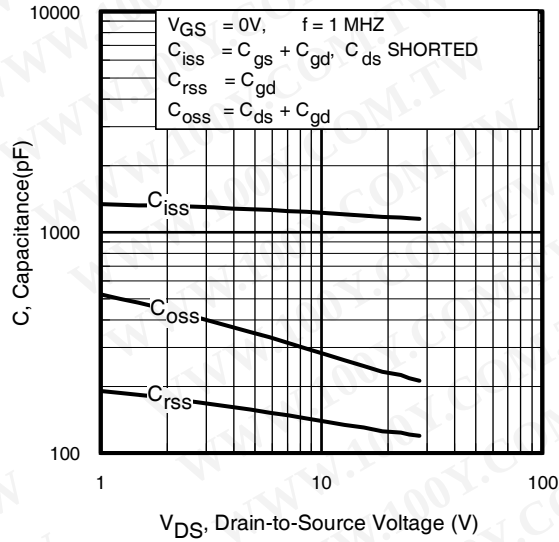




International  
IR Rectifier


IRF7413ZPbF

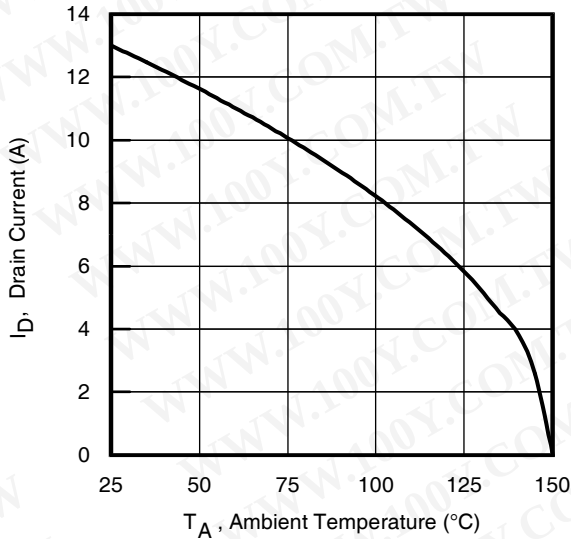

**Fig 9.** Maximum Drain Current vs. Ambient Temperature

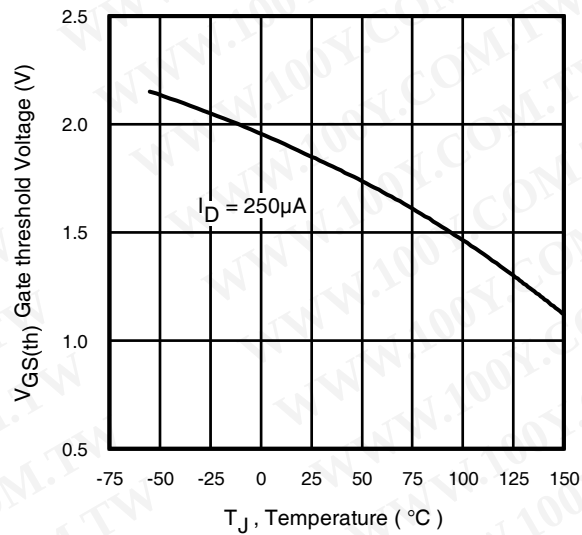


**Fig 10.** Threshold Voltage vs. Temperature

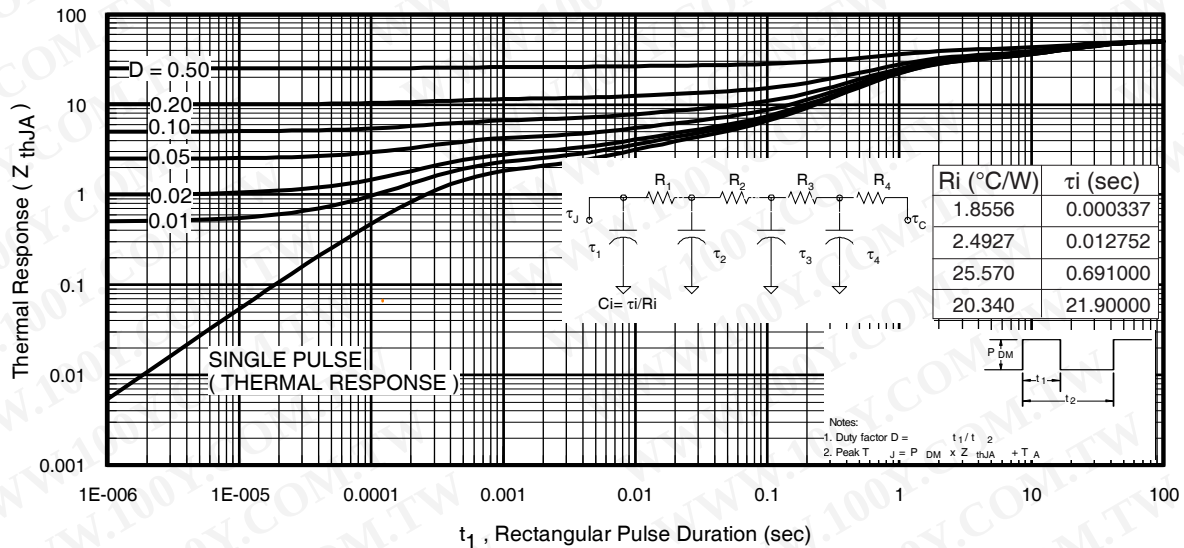


**Fig 11.** Maximum Effective Transient Thermal Impedance, Junction-to-Ambient

# IRF7413ZPbF


International  
**IR** Rectifier

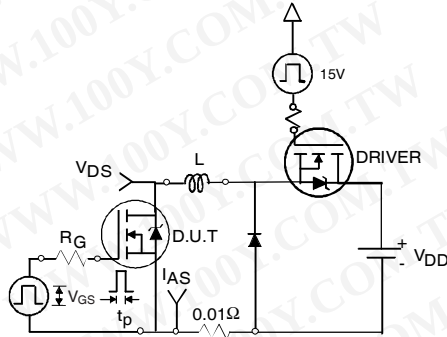


**Fig 12a.** Unclamped Inductive Test Circuit

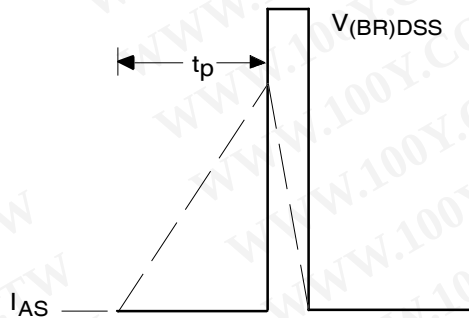


**Fig 12b.** Unclamped Inductive Waveforms

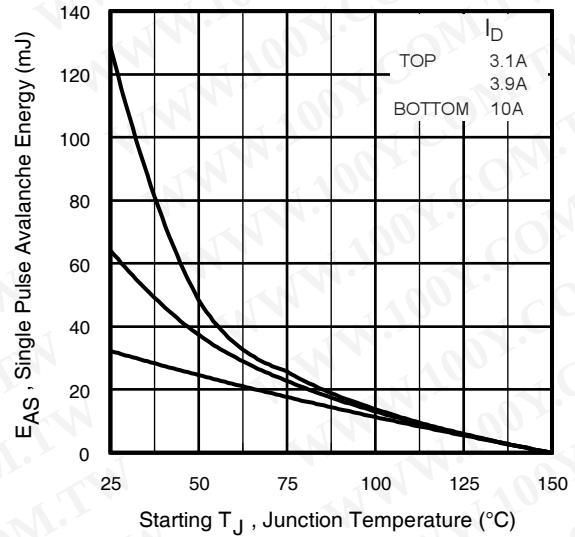


**Fig 12c.** Maximum Avalanche Energy vs. Drain Current

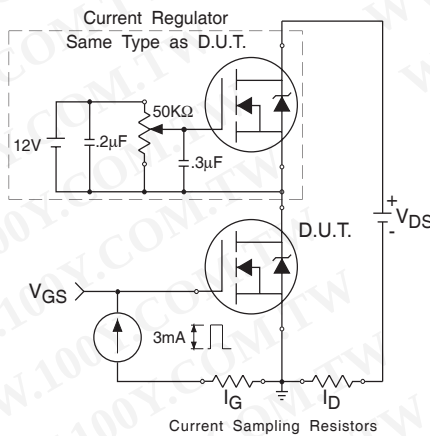

**Fig 13.** Gate Charge Test Circuit

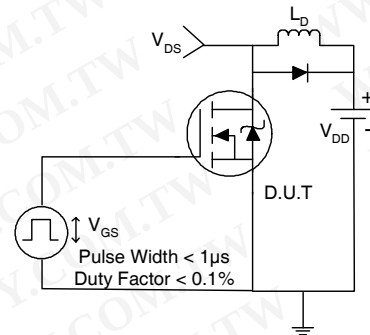

**Fig 14a.** Switching Time Test Circuit


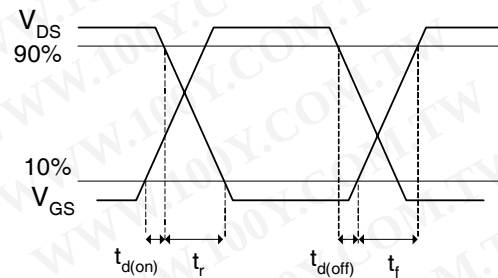


**Fig 14b.** Switching Time Waveforms


[www.irf.com](http://www.irf.com)

International  
**IR** Rectifier

**IRF7413ZPbF**

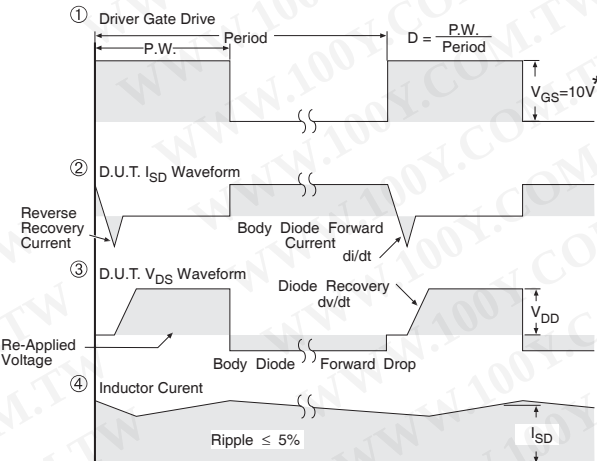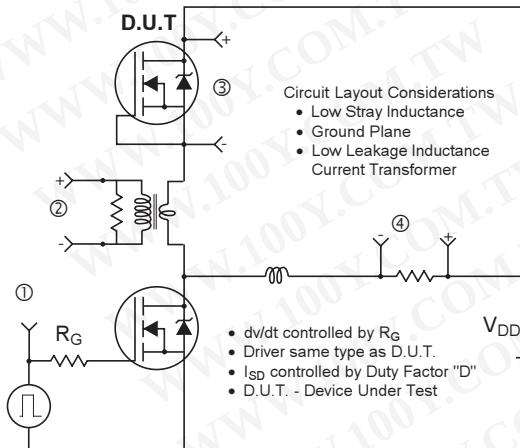

**Fig 15. Peak Diode Recovery  $dv/dt$  Test Circuit for N-Channel HEXFET® Power MOSFETs**

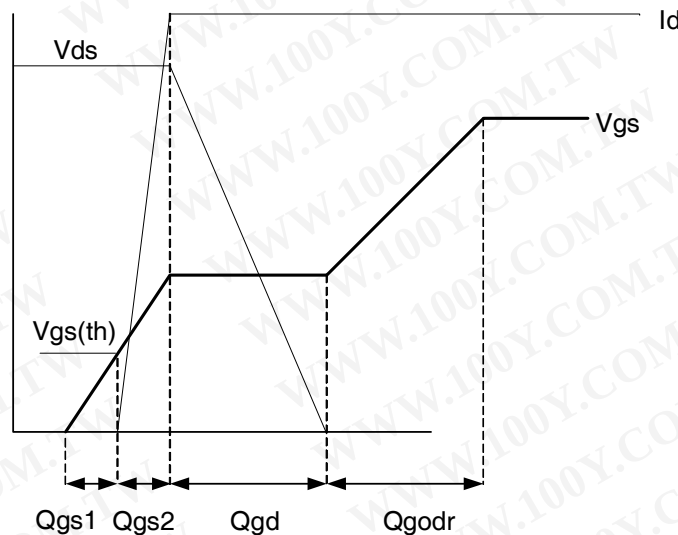

**Fig 16. Gate Charge Waveform**

# IRF7413ZPbF

International  
**IR** Rectifier

## Power MOSFET Selection for Non-Isolated DC/DC Converters

### Control FET

Special attention has been given to the power losses in the switching elements of the circuit - Q1 and Q2. Power losses in the high side switch Q1, also called the Control FET, are impacted by the  $R_{ds(on)}$  of the MOSFET, but these conduction losses are only about one half of the total losses.

Power losses in the control switch Q1 are given by;

$$P_{loss} = P_{conduction} + P_{switching} + P_{drive} + P_{output}$$

This can be expanded and approximated by;

$$P_{loss} = (I_{rms}^2 \times R_{ds(on)}) + \left( I \times \frac{Q_{gd}}{i_g} \times V_{in} \times f \right) + \left( I \times \frac{Q_{gs2}}{i_g} \times V_{in} \times f \right) + (Q_g \times V_g \times f) + \left( \frac{Q_{oss}}{2} \times V_{in} \times f \right)$$

This simplified loss equation includes the terms  $Q_{gs2}$  and  $Q_{oss}$  which are new to Power MOSFET data sheets.

$Q_{gs2}$  is a sub element of traditional gate-source charge that is included in all MOSFET data sheets. The importance of splitting this gate-source charge into two sub elements,  $Q_{gs1}$  and  $Q_{gs2}$ , can be seen from Fig 16.

$Q_{gs2}$  indicates the charge that must be supplied by the gate driver between the time that the threshold voltage has been reached and the time the drain current rises to  $I_{dmax}$  at which time the drain voltage begins to change. Minimizing  $Q_{gs2}$  is a critical factor in reducing switching losses in Q1.

$Q_{oss}$  is the charge that must be supplied to the output capacitance of the MOSFET during every switching cycle. Figure A shows how  $Q_{oss}$  is formed by the parallel combination of the voltage dependant (non-linear) capacitance's  $C_{ds}$  and  $C_{dg}$  when multiplied by the power supply input buss voltage.

### Synchronous FET

The power loss equation for Q2 is approximated by;

$$P_{loss} = P_{conduction} + P_{drive} + P_{output}^*$$

$$P_{loss} = (I_{rms}^2 \times R_{ds(on)}) + (Q_g \times V_g \times f) + \left( \frac{Q_{oss}}{2} \times V_{in} \times f \right) + (Q_{rr} \times V_{in} \times f)$$

\*dissipated primarily in Q1.

For the synchronous MOSFET Q2,  $R_{ds(on)}$  is an important characteristic; however, once again the importance of gate charge must not be overlooked since it impacts three critical areas. Under light load the MOSFET must still be turned on and off by the control IC so the gate drive losses become much more significant. Secondly, the output charge  $Q_{oss}$  and reverse recovery charge  $Q_{rr}$  both generate losses that are transferred to Q1 and increase the dissipation in that device. Thirdly, gate charge will impact the MOSFETs' susceptibility to Cdv/dt turn on.

The drain of Q2 is connected to the switching node of the converter and therefore sees transitions between ground and  $V_{in}$ . As Q1 turns on and off there is a rate of change of drain voltage dV/dt which is capacitively coupled to the gate of Q2 and can induce a voltage spike on the gate that is sufficient to turn the MOSFET on, resulting in shoot-through current. The ratio of  $Q_{gd}/Q_{gs1}$  must be minimized to reduce the potential for Cdv/dt turn on.

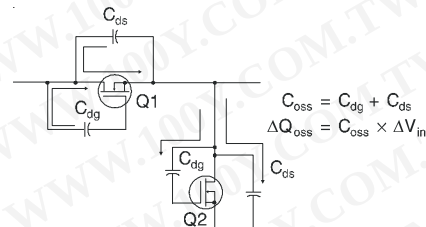


Figure A:  $Q_{oss}$  Characteristic




勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)



International  
**IR** Rectifier

**IRF7413ZPbF**

## SO-8 Package Details

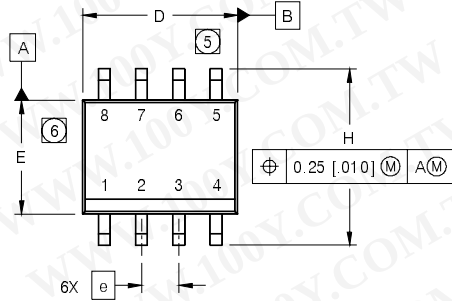


| DIM | INCHES |       | MILLIMETERS |       |
|-----|--------|-------|-------------|-------|
|     | MIN    | MAX   | MIN         | MAX   |
| A   | .0532  | .0688 | 1.35        | 1.75  |
| A1  | .0040  | .0098 | 0.10        | 0.25  |
| b   | .013   | .020  | 0.33        | 0.51  |
| c   | .0075  | .0098 | 0.19        | 0.25  |
| D   | .189   | .1968 | 4.80        | 5.00  |
| E   | .1497  | .1574 | 3.80        | 4.00  |
| e   | .050   | BASIC | 1.27        | BASIC |
| e1  | .025   | BASIC | 0.635       | BASIC |
| H   | .2284  | .2440 | 5.80        | 6.20  |
| K   | .0099  | .0196 | 0.25        | 0.50  |
| L   | .016   | .050  | 0.40        | 1.27  |
| y   | 0°     | 8°    | 0°          | 8°    |

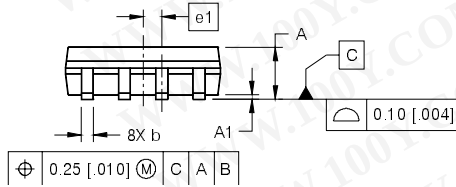

### NOTES:


1. DIMENSIONING & TOLERANCING PER ASME Y14.5M-1994.
2. CONTROLLING DIMENSION: MILLIMETER
3. DIMENSIONS ARE SHOWN IN MILLIMETERS [INCHES].
4. OUTLINE CONFORMS TO JEDEC OUTLINE MS-012AA.
5. DIMENSION DOES NOT INCLUDE MOLD PROTRUSIONS. MOLD PROTRUSIONS NOT TO EXCEED 0.15 [0.006].
6. DIMENSION DOES NOT INCLUDE MOLD PROTRUSIONS. MOLD PROTRUSIONS NOT TO EXCEED 0.25 [0.010].
7. DIMENSION IS THE LENGTH OF LEAD FOR SOLDERING TO A SUBSTRATE.

### FOOTPRINT

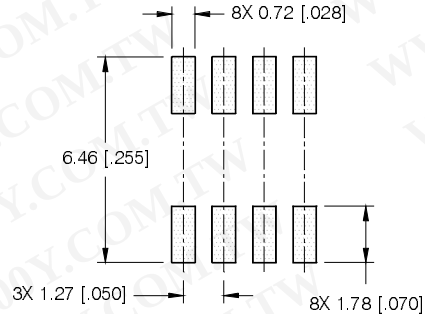

## SO-8 Part Marking

EXAMPLE: THIS IS AN IRF7101 (MOSFET)

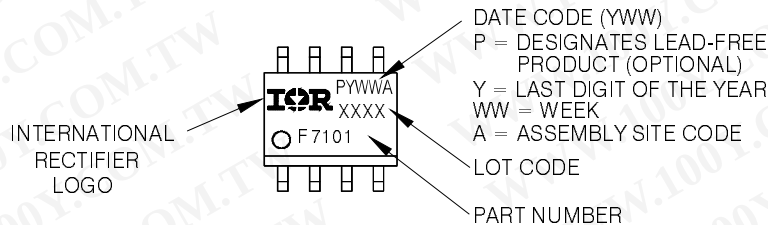

**Note:** For the most current drawing please refer to IR website at <http://www.irf.com/package/>  
[www.irf.com](http://www.irf.com)


勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

# IRF7413ZPbF

## SO-8 Tape and Reel


Dimensions are shown in millimeters (inches)

International  
**IR** Rectifier

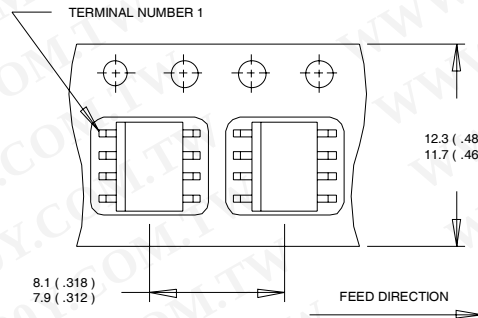

### NOTES:

1. CONTROLLING DIMENSION : MILLIMETER.
2. ALL DIMENSIONS ARE SHOWN IN MILLIMETERS(INCHES).
3. OUTLINE CONFORMS TO EIA-481 & EIA-541.

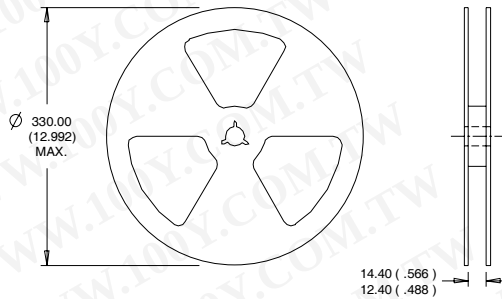

### NOTES :

1. CONTROLLING DIMENSION : MILLIMETER.
2. OUTLINE CONFORMS TO EIA-481 & EIA-541.

### Notes:

- ① Repetitive rating; pulse width limited by max. junction temperature.
- ② Starting  $T_J = 25^\circ\text{C}$ ,  $L = 0.62\text{mH}$ ,  $R_G = 25\Omega$ ,  $I_{AS} = 10\text{A}$ .
- ③ Pulse width  $\leq 400\mu\text{s}$ ; duty cycle  $\leq 2\%$ .
- ④ When mounted on 1 inch square copper board.

**Note:** For the most current drawing please refer to IR website at <http://www.irf.com/package/>

Data and specifications subject to change without notice.

This product has been designed and qualified for the Consumer market.

Qualification Standards can be found on IR's Web site.

International  
**IR** Rectifier

**IR WORLD HEADQUARTERS:** 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105

TAC Fax: (310) 252-7903

Visit us at [www.irf.com](http://www.irf.com) for sales contact information. 05/2008

[www.irf.com](http://www.irf.com)