

GENERAL PURPOSE APPLICATION.
SWITCHING APPLICATION.

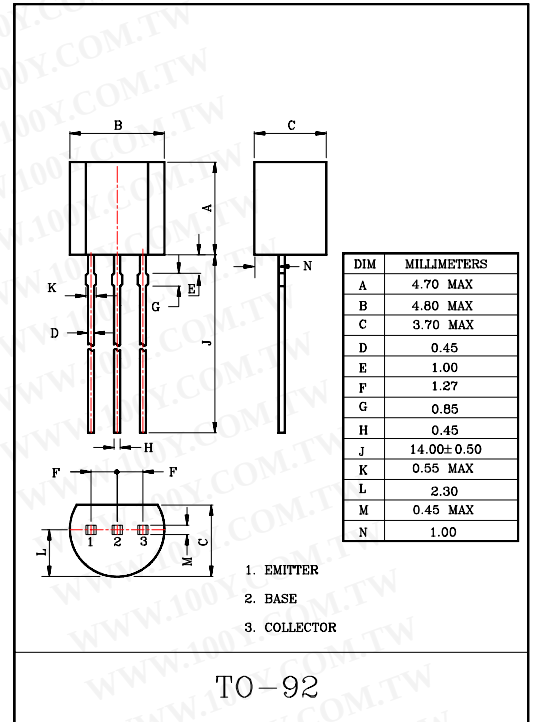
FEATURES

- Excellent h_{FE} Linearity.
- Complementary to KTC9013.

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

MAXIMUM RATINGS ($T_a=25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CBO}	-40	V
Collector-Emitter Voltage	V_{CEO}	-30	V
Emitter-Base Voltage	V_{EBO}	-5	V
Collector Current	I_C	-500	mA
Emitter Current	I_E	500	mA
Collector Power Dissipation	P_C	625	mW
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-55~150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I_{CBO}	$V_{CB}=-35\text{V}, I_E=0$	-	-	-0.1	μA
Emitter Cut-off Current	I_{EBO}	$V_{EB}=-5\text{V}, I_C=0$	-	-	-0.1	μA
DC Current Gain	$h_{FE}(\text{Note})$	$V_{CE}=-1\text{V}, I_C=-50\text{mA}$	64	-	246	
Collector-Emitter Saturation Voltage	$V_{CE(\text{sat})}$	$I_C=-100\text{mA}, I_B=-10\text{mA}$	-	-0.1	-0.25	V
Base-Emitter Voltage	V_{BE}	$I_C=-100\text{mA}, V_{CE}=-1\text{V}$	-	-0.8	-1.0	V
Transition Frequency	f_T	$V_{CB}=-6\text{V}, I_C=-20\text{mA}, f=100\text{MHz}$	150	-	-	MHz
Collector Output Capacitance	C_{ob}	$V_{CB}=-6\text{V}, I_E=0, f=1\text{MHz}$	-	7.0	-	pF

Note : h_{FE} Classification D:64~91, E:78~112, F:96~135,
 G:118~166, H:144~202, I:176~246