



Micro Commercial Components

Micro Commercial Components
 20736 Marilla Street Chatsworth
 CA 91311
 Phone: (818) 701-4933
 Fax: (818) 701-4939

MJE13003

Features

- Lead Free Finish/RoHS Compliant(Note 1) ("P" Suffix designates RoHS Compliant. See ordering information)
- Capable of 1.5Watts of Power Dissipation.
- Collector-current 1.5A
- Collector-base Voltage 700V
- Operating and storage junction temperature range: -55°C to +150°C
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL Rating 1

Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Max	Units
OFF CHARACTERISTICS				
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage ($I_C=10mA$, $I_B=0$)	400		Vdc
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage ($I_C=1000\mu A$, $I_E=0$)	700		Vdc
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage ($I_E=1000\mu A$, $I_C=0$)	9.0		Vdc
I_{CBO}	Collector Cutoff Current ($V_{CB}=700V$, $I_E=0$)		1000	μA
I_{CEO}	Collector Cutoff Current ($V_{CE}=400V$, $I_B=0$)		500	μA
I_{EBO}	Emitter Cutoff Current ($V_{EB}=9.0V$, $I_C=0$)		1000	μA

ON CHARACTERISTICS

$h_{FE(1)}$	DC Current Gain ($I_C=0.5A$, $V_{CE}=2.0V$)	8.0	40	
$h_{FE(2)}$	DC Current Gain ($I_C=0.5A$, $V_{CE}=10V$)	5.0		
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage ($I_C=1000mA$, $I_B=250mA$)		1.0	Vdc
$V_{BE(sat)}$	Base-Emitter Saturation Voltage ($I_C=1000mA$, $I_B=250mA$)		1.2	Vdc
V_{BE}	Base-Emitter Voltage ($I_E=2000mA$)		3.0	Vdc


SMALL-SIGNAL CHARACTERISTICS

f_T	Transistor Frequency ($I_C=100mA$, $V_{CE}=10V$, $f=1.0MHz$)	5.0		MHz
t_F	Fall Time $V_{CC}=100V$, $I_C=1.0$		0.5	μS
t_S	Storage Time $A, I_{B1}=I_{B2}=0.2A$		2.5	μS

Notes:1.High Temperature Solder Exemption Applied, see EU Directive Annex 7.

NPN Silicon Plastic-Encapsulate Transistor


TO-220

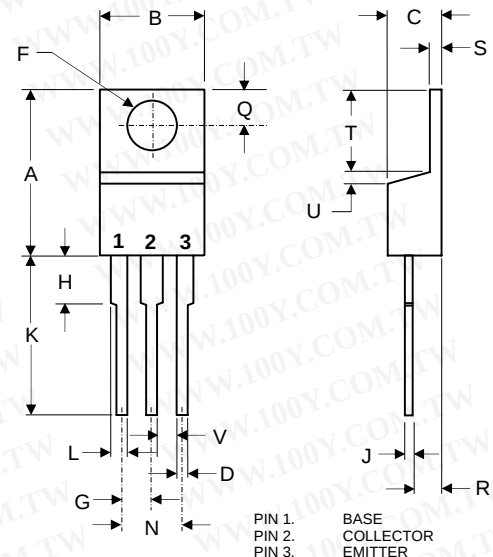


DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.560	.625	14.22	15.88	
B	.380	.420	9.65	10.67	
C	.140	.190	3.56	4.82	
D	.020	.045	0.51	1.14	
F	.139	.161	3.53	4.09	Ø
G	.190	.110	2.29	2.79	
H	---	.250	---	6.35	
J	.012	.025	0.30	0.64	
K	.500	.580	12.70	14.73	
L	.045	.060	1.14	1.52	
N	.190	.210	4.83	5.33	
Q	.100	.135	2.54	3.43	
R	.080	.115	2.04	2.92	
S	.045	.055	1.14	1.39	
T	.230	.270	5.84	6.86	
U	-----	.050	-----	1.27	
V	.045	-----	1.15	-----	

MJE13003


Typical Characteristics

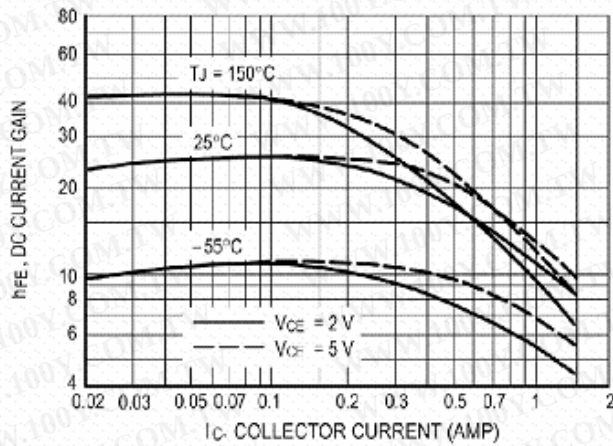


DC Current Gain

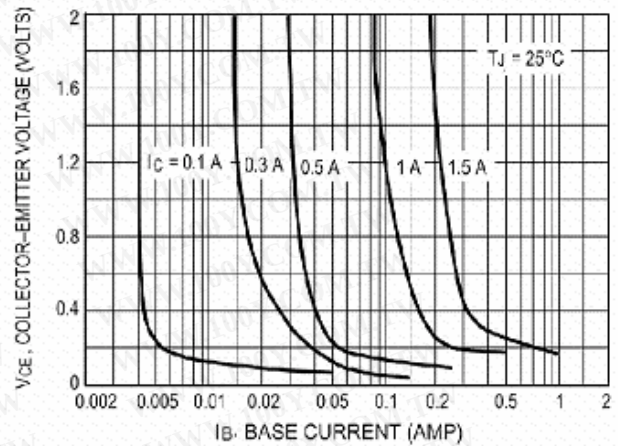


Collector Saturation Region

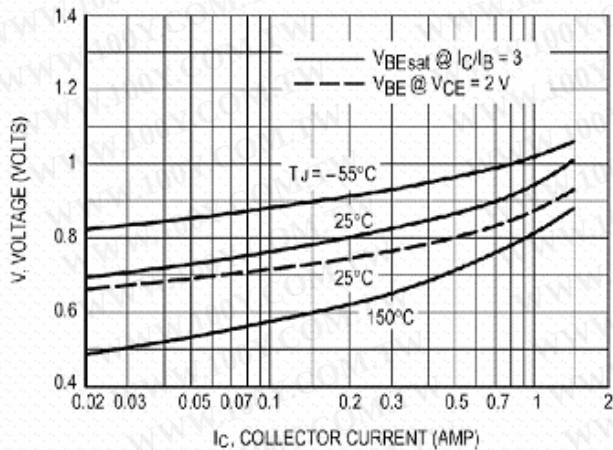


Base-Emitter Voltage

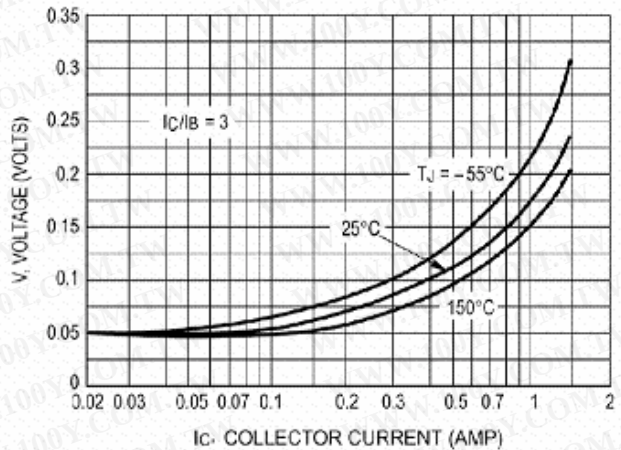

Collector-Emitter Saturation Region

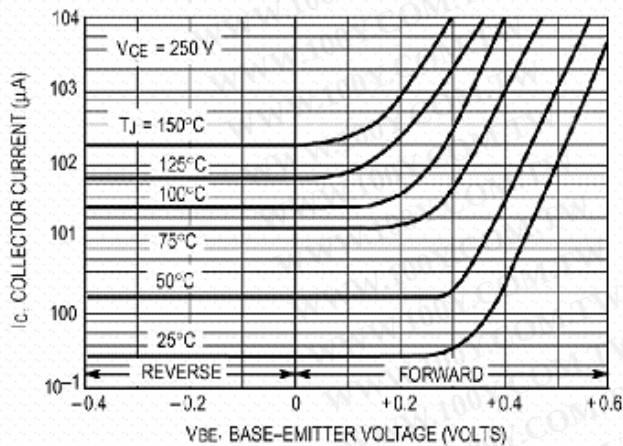

Collector Cutoff Region

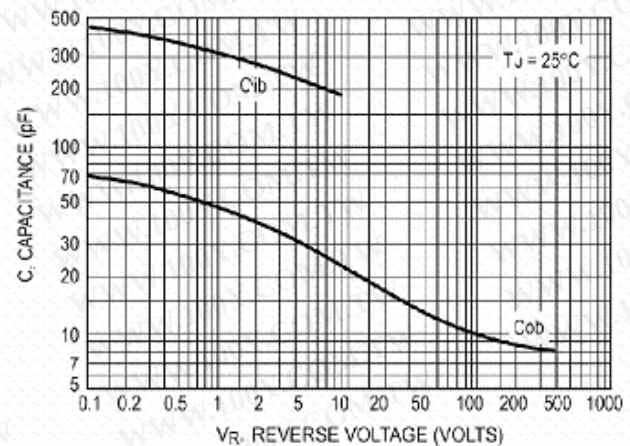

Capacitance



Micro Commercial Components

Ordering Information

Device	Packing
(Part Number)-BP	Bulk;1Kpcs/Box

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes .

Micro Commercial Components Corp. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

www.mccsemi.com