

M.C.C.

Micro Commercial Components

Micro Commercial Components
 20736 Marilla Street Chatsworth
 CA 91311
 Phone: (818) 701-4933
 Fax: (818) 701-4939

MMST4403

Features


- Power dissipation: 200mW ($T_{amb}=25^{\circ}C$)
- Collector current: -0.6A
- Marking : K3T
- Operating and Storage junction temperature range
 $-55^{\circ}C$ to $+150^{\circ}C$
- Case Material: Molded Plastic. UL Flammability
 Classification Rating 94V-0 and MSL Rating 1

Electrical Characteristics @ $25^{\circ}C$ Unless Otherwise Specified

Symbol	Parameter	Min	Max	Units
OFF CHARACTERISTICS ⁽²⁾				
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage ($I_C=-1.0mA$, $I_B=0$)	-40	---	Vdc
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage ($I_C=-100\mu A$, $I_E=0$)	-40	---	Vdc
$V_{(BR)EBO}$	Collector-Emitter Breakdown Voltage ($I_E=-100\mu A$, $I_C=0$)	-5.0	---	Vdc
I_{CBO}	Collector Cutoff Current ($V_{CB}=-35V$, $I_E=0V$)	---	-0.1	μA
I_{CEO}	Collector Cutoff Current ($V_{CE}=-35V$, $I_B=0V$)	---	-0.1	μA
I_{EBO}	Emitter Cutoff Current ($V_{EB}=-4V$, $I_C=0V$)	---	-0.1	μA
h_{FE}	DC Current Gain ($I_C=-150mA$, $V_{CE}=-2V$)	100	300	---
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage ($I_C=-150mA$, $I_B=-15mA$)	---	-0.4	Vdc
$V_{BE(sat)}$	Base-Emitter Saturation Voltage ($I_C=-150mA$, $I_B=-15mA$)	---	-0.95	Vdc
f_T	Current Gain-Bandwidth Product ($V_{CE}=-10V$, $I_C=-20mA$, $f=100MHz$)	200	---	MHz
C_{ob}	Output Capacitance ($V_{CB}=-10V$, $f=1.0MHz$, $I_E=0$)	---	8.5	pF
t_d	Delay Time $V_{CC}=-30V$, $I_C=-150\mu A$, $V_{BE(off)}=-2V$, $I_{B1}=15mA$	---	15	ns
t_r	Rise Time $V_{CC}=-30V$, $I_C=-150\mu A$, $V_{BE(off)}=-2V$, $I_{B1}=15mA$	---	20	ns
t_s	Storage Time $V_{CC}=-30V$, $I_C=-150mA$, $I_{B1}=I_{B2}=-15mA$	---	225	ns
t_f	Fall Time $V_{CC}=-30V$, $I_C=-150mA$, $I_{B1}=I_{B2}=-15mA$	---	30	ns


PNP Small Signal Transistors

SOT-323

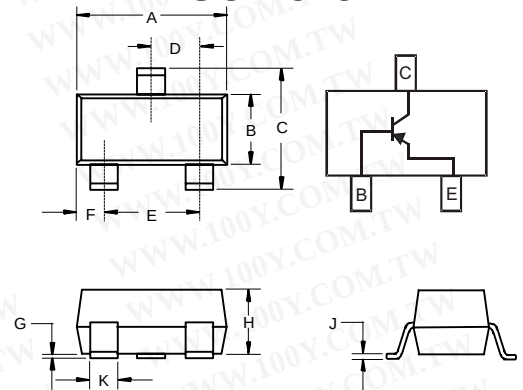

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.071	.087	1.80	2.20	
B	.045	.053	1.15	1.35	
C	.079	.087	2.00	2.20	
D	.026 Nominal		0.65 Nominal		
E	.047	.055	1.20	1.40	
F	.012	.016	.30	.40	
G	.000	.004	.000	.100	
H	.035	.039	.90	1.00	
J	.004	.010	.100	.250	
K	.012	.016	.30	.40	

Suggested Solder Pad Layout





Micro Commercial Components

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel;3Kpcs/Reel

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes.

Micro Commercial Components Corp. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.

www.mccsemi.com