

Features

- Lead Free Finish/RoHS Compliant(Note 1) ("P" Suffix designates RoHS Compliant. See ordering information)
- High DC Current Gain : $h_{FE}=2500$ (Typ) @ $I_C=4.0\text{Adc}$
- Low Collector-Emitter Saturation Voltage
- Monolithic Construction with Built-in Base-Emitter Shunt Resistors
- TO-220 Compact package
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL Rating 1

Maximum Ratings

Symbol	Rating	Rating	Unit
V_{CEO}	Collector-Emitter Voltage	TIP105 60 TIP106 80 TIP107 100	V
V_{CBO}	Collector-Base Voltage	TIP105 60 TIP106 80 TIP107 100	V
V_{EBO}	Emitter-Base Voltage	5.0	V
I_C	Collector Current-continuous	8.0	A
I_{CP}	Collector Current-peak	15	A
I_B	Base Current	1.0	A
P_D	Collector Dissipation @ $T_C=25^\circ\text{C}$ Derate above 25°C	80 0.64	W W/ $^\circ\text{C}$
T_J	Junction Temperature	-55 to +150	$^\circ\text{C}$
T_{STG}	Storage Temperature	-55 to +150	$^\circ\text{C}$

Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Max	Units
--------	-----------	-----	-----	-------

OFF CHARACTERISTICS

$V_{CEO(SUS)}$	Collector-Emitter Sustaining Voltage ($I_C=30\text{mAdc}$, $I_B=0$)	TIP105 60 TIP106 80 TIP107 100	---	Vdc
I_{CEO}	Collector Cut-off Current ($V_{CE}=30\text{Vdc}$, $I_B=0$) ($V_{CE}=40\text{Vdc}$, $I_B=0$) ($V_{CE}=50\text{Vdc}$, $I_B=0$)	TIP105 --- TIP106 --- TIP107 ---	50 50 50	μAdc
I_{CBO}	Collector Cut-off Current ($V_{CB}=60\text{Vdc}$, $I_E=0$) ($V_{CB}=80\text{Vdc}$, $I_E=0$) ($V_{CB}=100\text{Vdc}$, $I_E=0$)	TIP105 --- TIP106 --- TIP107 ---	50 50 50	μAdc
I_{EBO}	Emitter Cut-off Current ($V_{BE}=5.0\text{Vdc}$, $I_C=0$)	---	8.0	mAdc

ON CHARACTERISTICS (1)

$h_{FE(1)}$	DC Current Gain ($I_C=3.0\text{Adc}$, $V_{CE}=4.0\text{Vdc}$) ($I_C=8.0\text{Adc}$, $V_{CE}=4.0\text{Vdc}$)	1000 200	20000 ---	----
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage ($I_C=3.0\text{Adc}$, $I_B=6.0\text{mAdc}$) ($I_C=8.0\text{Adc}$, $I_B=80\text{mAdc}$)	---	2.0 2.5	Vdc
$V_{BE(ON)}$	Base-Emitter On Voltage ($I_C=8.0\text{Adc}$, $V_{CE}=4.0\text{Adc}$)	---	2.8	Vdc
h_{fe}	Small-Signal Current Gain ($I_C=3.0\text{Adc}$, $V_{CE}=4.0\text{Vdc}$, $f=1.0\text{MHz}$)	4.0	---	---
C_{ob}	Output Capacitance ($V_{CB}=10\text{V}$, $I_E=0$, $f=0.1\text{MHz}$)	---	300	pF


(1) Pulse Test: Pulse Width<300us, Duty Cycle<2%

Notes:1.High Temperature Solder Exemption Applied, see EU Directive Annex 7.

TIP105 TIP106 TIP107

PNP Plastic Medium-Power Silicon Transistors

TO-220

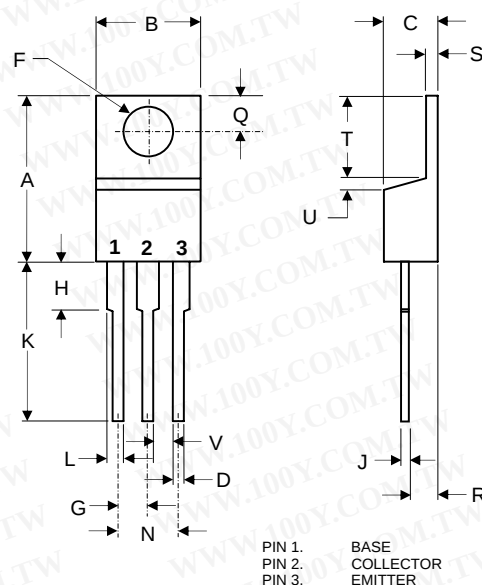

DIM	DIMENSIONS				NOTE
	INCHES		MM		
A	.560	.625	14.22	15.88	
B	.380	.420	9.65	10.67	
C	.140	.190	3.56	4.82	
D	.020	.045	0.51	1.14	
F	.139	.161	3.53	4.09	Ø
G	.190	.110	2.29	2.79	
H	---	.250	---	6.35	
J	.012	.025	0.30	0.64	
K	.500	.580	12.70	14.73	
L	.045	.060	1.14	1.52	
N	.190	.210	4.83	5.33	
Q	.100	.135	2.54	3.43	
R	.080	.115	2.04	2.92	
S	.045	.055	1.14	1.39	
T	.230	.270	5.84	6.86	
U	----	.050	----	1.27	
V	.045	----	1.15	----	

TIP105,106,107

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

•M•C•C•

Micro Commercial Components

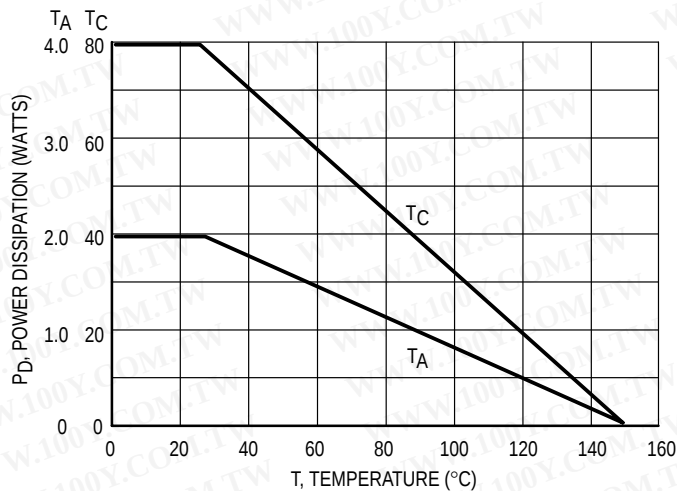


Figure 1. Power Derating

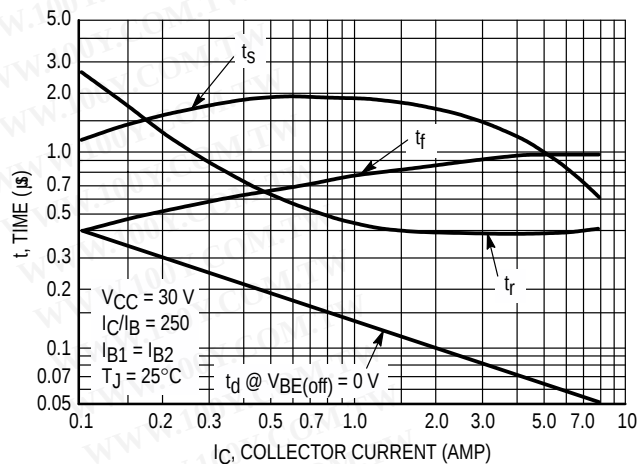


Figure 2. Switching Times

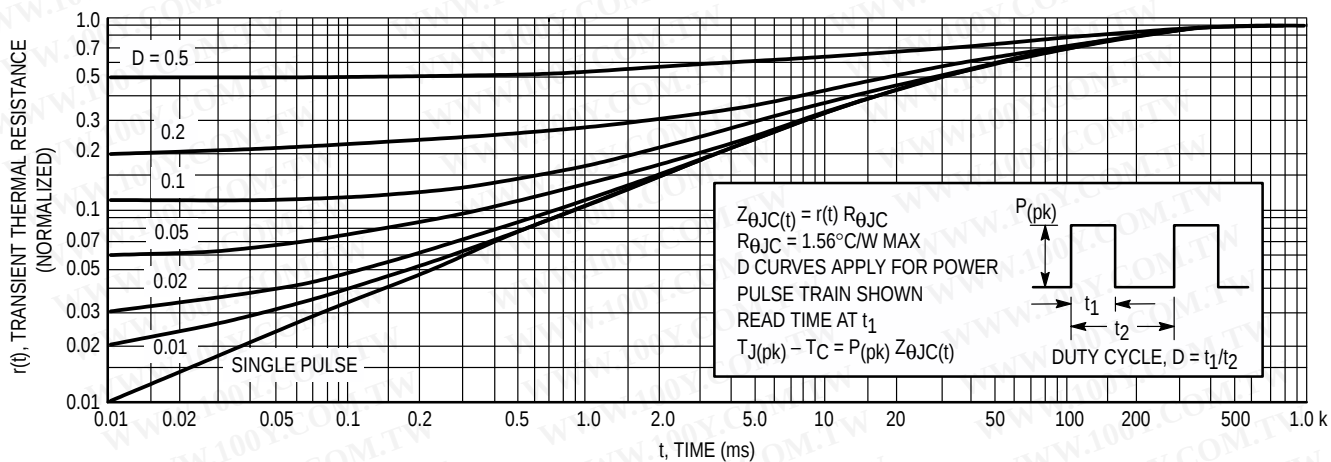


Figure 3. Thermal Response

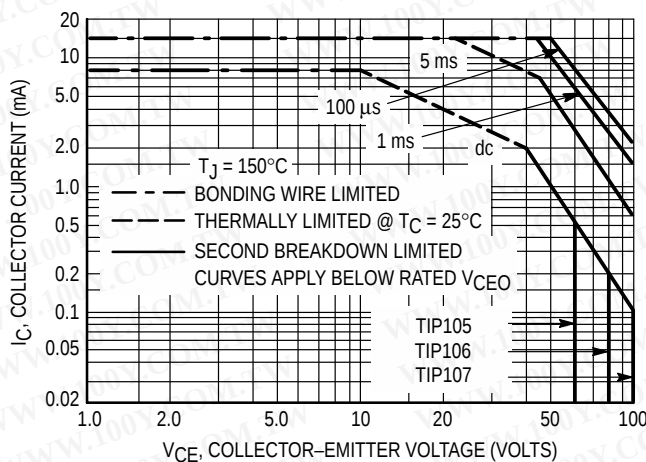


Figure 4. Active-Region Safe Operating Area

www.mccsemi.com

TIP105,106,107

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

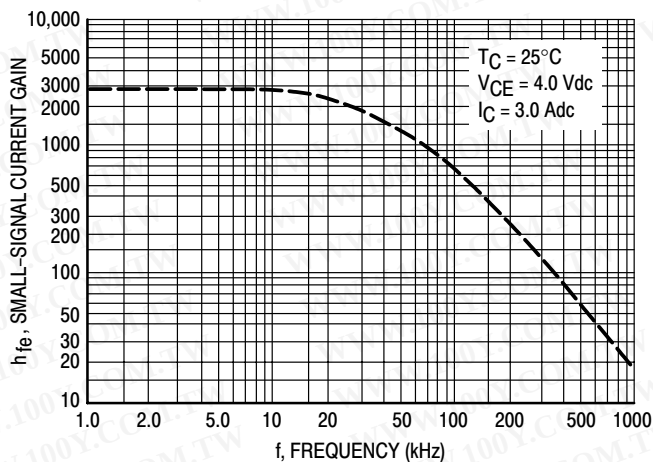


Figure 5. Small-Signal Current Gain

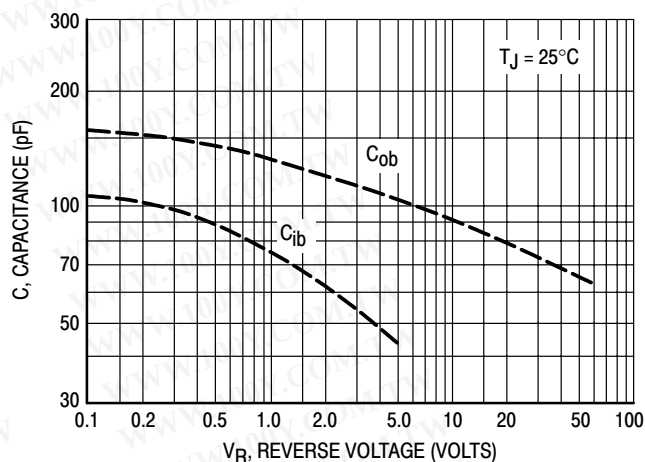


Figure 6. Capacitance

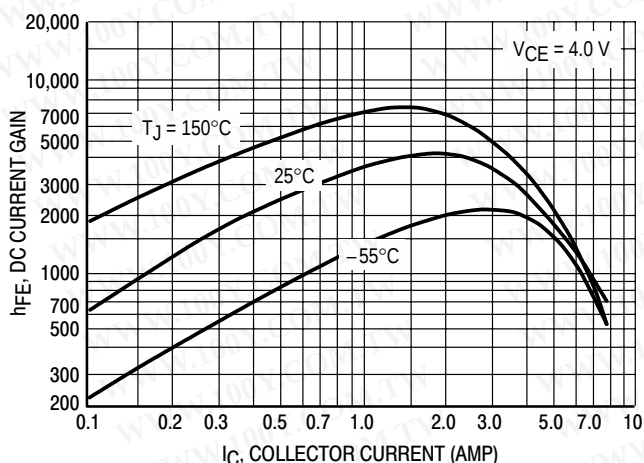


Figure 7. DC Current Gain

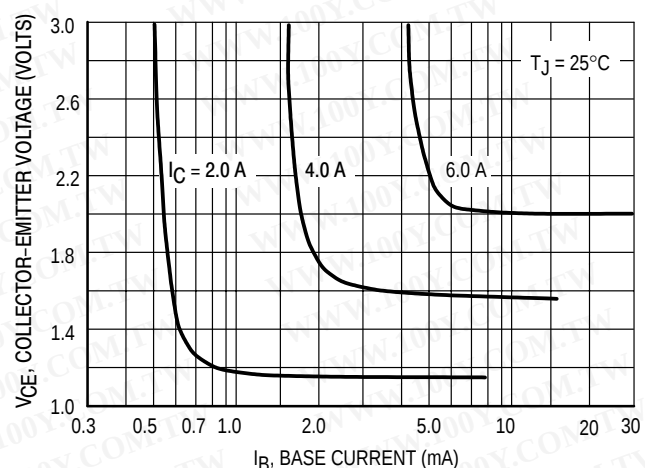


Figure 8. Collector Saturation Region

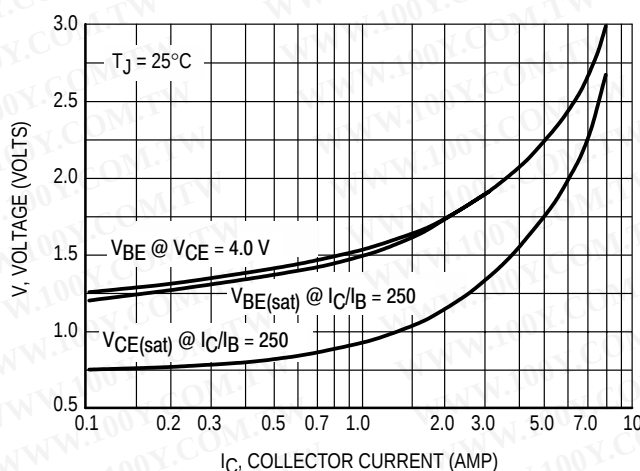


Figure 9. "On" Voltages



Micro Commercial Components

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Ordering Information

Device	Packing
(Part Number)-BP	Bulk;1Kpcs/Box

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.