

## Single Phase Rectifier Bridge


## PSB 35

$$I_{dAVM} = 35 \text{ A}$$

$$V_{RRM} = 800-1800 \text{ V}$$

Preliminary Data Sheet

$V_{RSM}$ (V)	$V_{RRM}$ (V)	Type
800	800	PSB 35/08
1200	1200	PSB 35/12
1400	1400	PSB 35/14
1600	1600	PSB 35/16
1800	1800	PSB 35/18

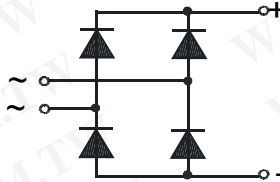

Symbol	Test Conditions	Maximum Ratings
$I_{dAVM}$	$T_C = 85^\circ\text{C}$ , (per module)	35 A
$I_{FSM}$	$T_{VJ} = 45^\circ\text{C}$ $t = 10 \text{ ms}$ (50 Hz), sine	400 A
	$V_R = 0$ $t = 8.3 \text{ ms}$ (60 Hz), sine	440 A
	$T_{VJ} = T_{VJM}$ $t = 10 \text{ ms}$ (50 Hz), sine	360 A
	$V_R = 0$ $t = 8.3 \text{ ms}$ (60 Hz), sine	400 A
$\int i^2 dt$	$T_{VJ} = 45^\circ\text{C}$ $t = 10 \text{ ms}$ (50 Hz), sine	800 A <sup>2</sup> s
	$V_R = 0$ $t = 8.3 \text{ ms}$ (60 Hz), sine	810 A <sup>2</sup> s
	$T_{VJ} = T_{VJM}$ $t = 10 \text{ ms}$ (50 Hz), sine	650 A <sup>2</sup> s
	$V_R = 0$ $t = 8.3 \text{ ms}$ (60 Hz), sine	670 A <sup>2</sup> s
$T_{VJ}$		-40... + 150 °C
$T_{VJM}$		150 °C
$T_{stg}$		-40... + 150 °C
$V_{ISOL}$	50/60 Hz, RMS $t = 1 \text{ min}$	2500 V~
	$I_{ISOL} \leq 1 \text{ mA}$ $t = 1 \text{ s}$	3000 V~
$M_d$	Mounting torque (M4)	1.5 Nm
	Terminal connection torque (M4)	1.5 Nm
<b>Weight</b>	typ.	105 g

### Features

- 
- Package with screw terminals
- Isolation voltage 3000 V~
- Planar glass passivated chips
- Blocking voltage up to 1800 V
- Low forward voltage drop
- UL registered E 148688

### Applications


- Supplies for DC power equipment
- Input rectifier for PWM inverter
- Battery DC power supplies
- Field supply for DC motors

### Advantages

- Easy to mount with two screws
- Space and weight savings
- Improved temperature and power cycling capability

### Package style and outline

Dimensions in mm (1mm = 0.0394")

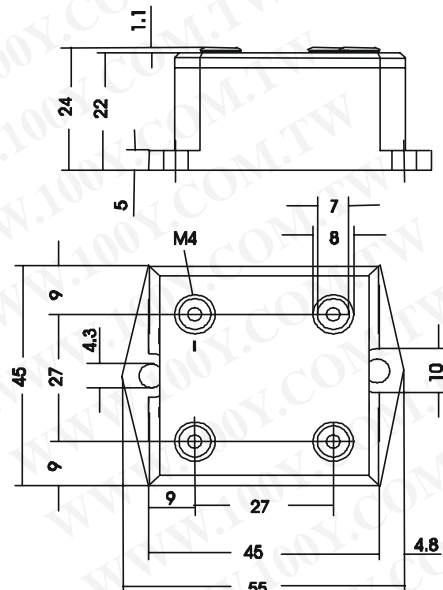

Symbol	Test Conditions	Characteristic Value
$I_R$	$V_R = V_{RRM}$ , $T_{VJ} = 25^\circ\text{C}$	$\leq 0.3 \text{ mA}$
	$V_R = V_{RRM}$ , $T_{VJ} = T_{VJM}$	$\leq 5 \text{ mA}$
$V_F$	$I_F = 150 \text{ A}$ , $T_{VJ} = 25^\circ\text{C}$	$\leq 2.2 \text{ V}$
$V_{TO}$	For power-loss calculations only	0.85 V
$r_T$		12 mΩ
$R_{thJC}$	per diode; DC	2.8 K/W
	per module	0.7 K/W
$R_{thJK}$	per diode; DC	3.4 K/W
	per module	0.85 K/W
$d_s$	Creeping distance on surface	18.6 mm
$d_A$	Creeping distance in air	18.6 mm
$a$	Max. allowable acceleration	50 m/s <sup>2</sup>

Data according to IEC 60747 refer to a single diode unless otherwise stated

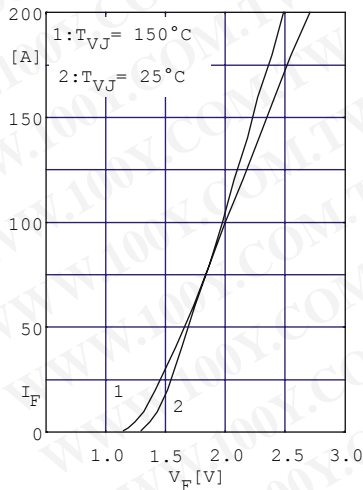


Fig. 1 Forward current versus voltage drop per diode

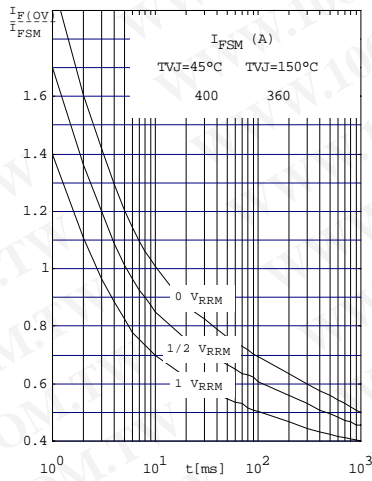


Fig. 2 Surge overload current per diode  $I_{FSM}$ : Crest value. t: duration

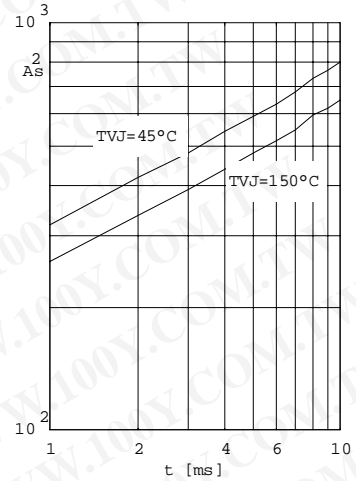


Fig. 3  $\int i^2 dt$  versus time (1-10ms) per diode (or thyristor)

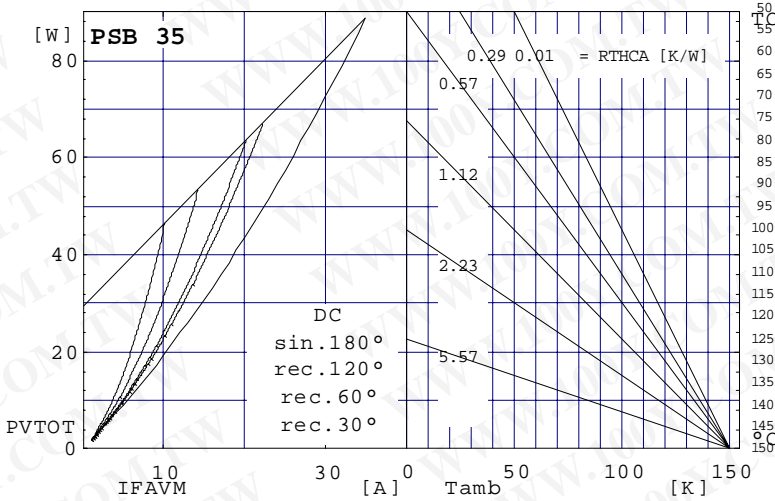


Fig. 4 Power dissipation versus direct output current and ambient temperature

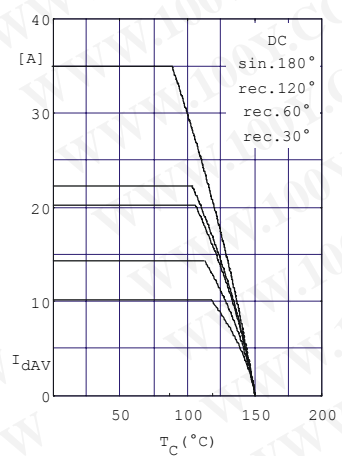


Fig. 5 Maximum forward current at case temperature

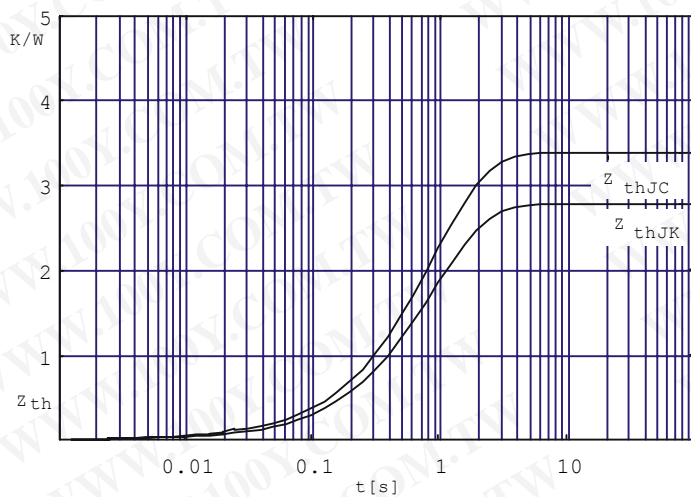


Fig. 6 Transient thermal impedance per diode (or thyristor), calculated