

**SINGLE-PHASE GLASS PASSIVATED
SILICON BRIDGE RECTIFIER**

VOLTAGE RANGE 50 to 1000 Volts CURRENT 4.0 Ampere

FEATURES

- * Ideal for printed circuit board
- * Surge overload rating: 150 amperes peak
- * Mounting position: Any
- * Weight: 4.8 grams
- * Molded structure

MECHANICAL DATA


- * UL listed the recognized component directory, file #E94233
- * Epoxy: Device has UL flammability classification 94V-O

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%.



RS-4L

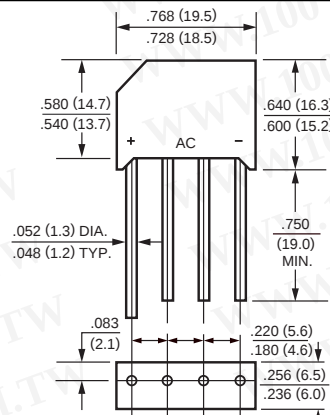

Dimensions in inches and (millimeters)

MAXIMUM RATINGS (At $T_A = 25^\circ\text{C}$ unless otherwise noted)

RATINGS	SYMBOL	RS401L	RS402L	RS403L	RS404L	RS405L	RS406L	RS407L	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Bridge Input Voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Output Current $T_A = 50^\circ\text{C}$	I_O	4.0							Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	150							Amps
Typical Thermal Resistance from junction to case (Note 2)	$R_{\theta JC}$	10							$^\circ\text{C/W}$
Typical Thermal Resistance from junction to ambient	$R_{\theta JA}$	28							$^\circ\text{C/W}$
Operating Temperature Range	T_J	-55 to $+150$							$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 to $+150$							$^\circ\text{C}$
Typical Junction Capacitance (Note)	C_J	40							pF

ELECTRICAL CHARACTERISTICS (At $T_A = 25^\circ\text{C}$ unless otherwise noted)

CHARACTERISTICS	SYMBOL	RS401L	RS402L	RS403L	RS404L	RS405L	RS406L	RS407L	UNITS
Maximum Forward Voltage Drop per Bridgeat Element at 4.0A DC	V_F	1.0							Volts
Maximum Reverse Current at Rated	I_R	5.0							μAmps
Dc Blocking Voltage per element		1.0							mAmps

NOTES : 1. Measured at 1 MHz and applied reverse voltage of 4.0 volts
2. Device mounted on 50mm x 50mm x 1.6mm Cu Plate Heatsink.
3. "Fully ROHS compliant", "100% Sn plating (Pb-free)".

2005-3

REV: A

RATING AND CHARACTERISTIC CURVES (RS401L THRU RS407L)

FIG. 1 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

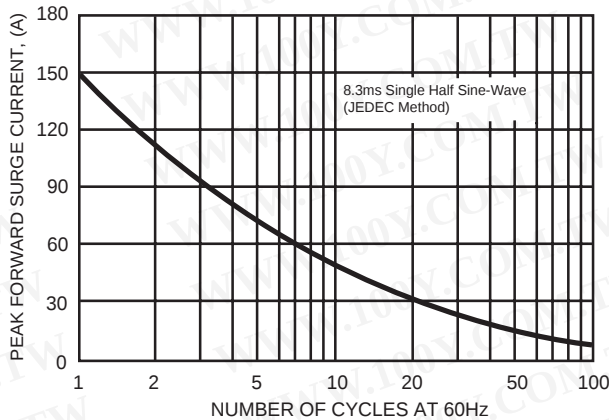


FIG. 2 - TYPICAL FORWARD CURRENT DERATING CURVE

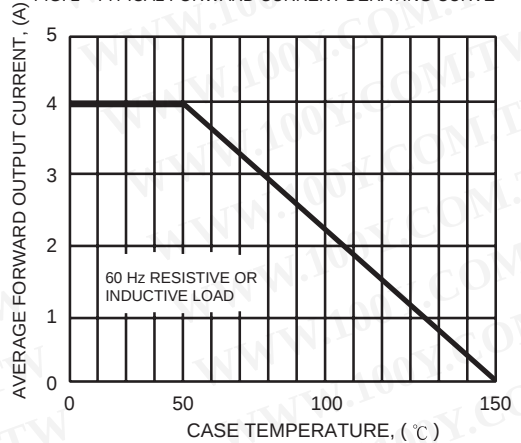


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS


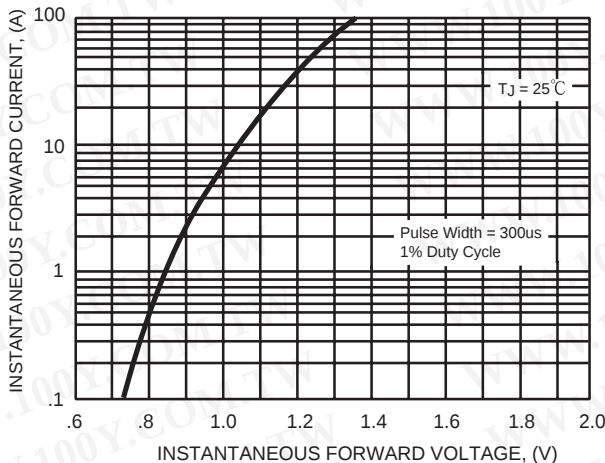


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS



勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

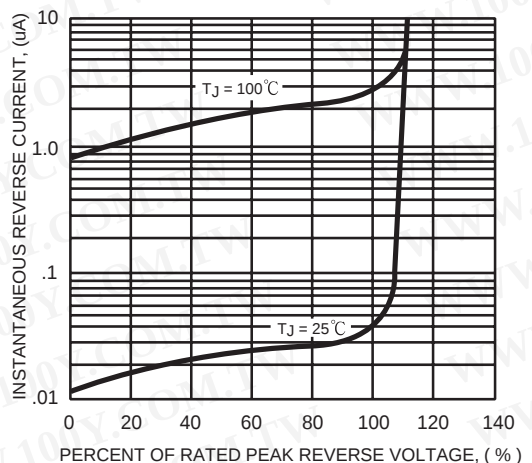