



SOLID STATE INC.

46 FARRAND STREET
BLOOMFIELD, NEW JERSEY 07003

www.solidstateinc.com

SILICON POWER SWITCHING TRANSISTORS

2N5320, 2N5321 NPN
2N5322, 2N5323 PNP



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

TO-39
Metal Can Package

Medium Power Amplifier and Switching Applications

ABSOLUTE MAXIMUM RATINGS

DESCRIPTION	SYMBOL	2N5320	2N5321	2N5322	2N5323	UNITS
Collector Emitter Voltage	V_{CEO}	75	50	75	50	V
Collector Base Voltage	V_{CBO}	100	75	100	75	V
Emitter Base Voltage	V_{EBO}	7	5	7	5	V
Collector Current - Continuous	I_C	2.0				A
Base Current	I_B	1.0				A
Power Dissipation@ $T_a=25^\circ\text{C}$ Derate Above 25°C	P_D	1 5.71				W mW/ $^\circ\text{C}$
Power Dissipation@ $T_c=25^\circ\text{C}$ Derate Above 25°C	P_D	10 57.14				W mW/ $^\circ\text{C}$
Operating And Storage Junction Temperature Range	T_j, T_{slg}	- 65 to +200				$^\circ\text{C}$

THERMAL CHARACTERISTICS

Junction to Ambient in free air	$R_{th(j-a)}$	175	$^\circ\text{C/W}$
Junction to Case	$R_{th(j-c)}$	17.5	$^\circ\text{C/W}$

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$ unless specified otherwise)

DESCRIPTION	SYMBOL	TEST CONDITION	MIN	MAX	UNITS
Collector Emitter Voltage	V_{CEO}	$I_C=100\text{mA}, I_B=0$ 2N5320/5322 2N5321/5323	75 50		V V
Collector Cut Off Current	I_{CEX}	$V_{CE}=70\text{V}, V_{BE}=1.5\text{V}, T_c=150^\circ\text{C}$ 2N5320/5322		5	mA
		$V_{CE}=45\text{V}, V_{BE}=1.5\text{V}, T_c=150^\circ\text{C}$ 2N5321/5323		5	mA
		$V_{CE}=100\text{V}, V_{BE}=1.5\text{V}$ 2N5320/5322		100	μA
		$V_{CE}=75\text{V}, V_{BE}=1.5\text{V}$ 2N5321/5323		100	μA
Emitter Cut Off Current	I_{EBO}	$V_{BE}=5\text{V}, I_C=0$ 2N5321/5323		100	μA
		$V_{BE}=7\text{V}, I_C=0$ 2N5320/5322		100	μA

SILICON POWER SWITCHING TRANSISTORS

2N5320, 2N5321 NPN
2N5322, 2N5323 PNP



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

TO-39
Metal Can Package

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$ unless specified otherwise)

DESCRIPTION	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNITS
DC Current Gain	h_{FE}	$I_C=1\text{A}, V_{CE}=2\text{V}$ 2N5320/5322	10			
		$I_C=0.5\text{A}, V_{CE}=4\text{V}$ 2N5320/5322	30		130	
		2N5321/5323	40		250	
Collector Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=500\text{mA}, I_B=50\text{mA}$ 2N5320			0.5	V
		2N5321			0.8	V
		2N5322			0.7	V
		2N5323			1.2	V
Base Emitter On Voltage	$V_{BE(on)}$	$I_C=500\text{mA}, V_{CE}=4\text{V}$ 2N5320/5322			1.1	V
		2N5321/5323			1.4	V

DYNAMIC CHARACTERISTICS

Small Signal Current Gain	h_{fe}	$I_C=50\text{mA}, V_{CE}=4\text{V}, f=10\text{MHz}$	5			
---------------------------	----------	---	---	--	--	--

SWITCHING CHARACTERISTICS

Turn On time	t_{on}	$V_{CC}=30\text{V}, I_C=500\text{mA}, I_{B1}=50\text{mA}$ 2N5320/5321			80	ns
		2N5322/5323			100	ns
Turn Off time	t_{off}	$V_{CC}=30\text{V}, I_C=500\text{mA}, I_{B1}=I_{B2}=50\text{mA}$ 2N5320/5321			800	ns
		2N5322/5323			1000	ns


*Pulsed: Pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$

2N5320, 2N5321 NPN
2N5322, 2N5323 PNP

TO-39
Metal Can Package


勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

TO-39 Metal Can Package

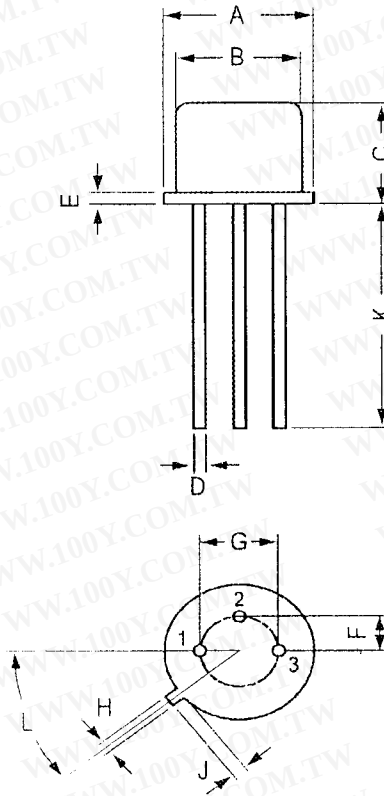

All dimensions are in mm

DIM	MIN	MAX
A	8.50	9.39
B	7.74	8.50
C	6.09	6.60
D	0.40	0.53
E	—	0.88
F	2.41	2.66
G	4.82	5.33
H	0.71	0.86
J	0.73	1.02
K	12.70	—
L	42 DEG	48 DEG



PIN CONFIGURATION
1. EMITTER
2. BASE
3. COLLECTOR