

DIODE MODULE

DD(KD)100GB40/80

TOP





UL;E76102 (M)

Power Diode Module **DD100GB** series are designed for various rectifier circuits. **DD100GB** has two diode chips connected in series and the mounting base is electrically isolated from elements for simple heatsink construction. Wide voltage rating up to, 800V is available for various input voltage.

- Isolated mounting base
- Two elements in a package for simple (single and three phase) bridge connections
- Highly reliable glass passivated chips
- High surge current capability

(Applications)

Various rectifiers, Battery chargers, DC motor drives

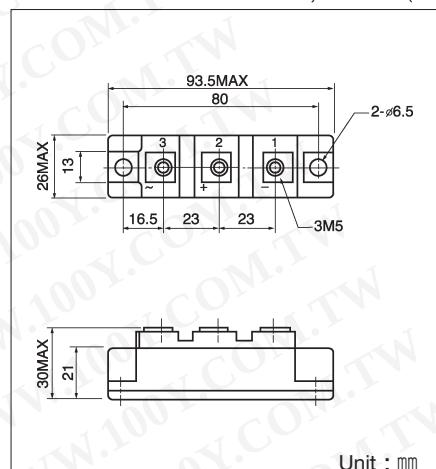

Maximum Ratings

(T_j=25°C)






Symbol	Item	Ratings		Unit
		DD100GB40	DD100GB80	
V _{RRM}	Repetitive Peak Reverse Voltage	400	800	V
V _{RSM}	Non-Repetitive Peak Reverse Voltage	480	960	V

Symbol	Item		Conditions	Ratings	Unit
I _{F(AV)}	Average Forward Current		Single phase, half wave, 180° conduction, T _c : 115°C	100	A
I _{F(RMS)}	R.M.S. Forward Current		Single phase, half wave, 180° conduction, T _c : 115°C	155	A
I _{FSM}	Surge Forward Current		1/2 cycle, 50/60Hz, peak value, non-repetitive	1800/2000	A
I _t	I _t		Value for one cycle of surge current	16500	A ² S
T _j	Junction Temperature			-40~+150	°C
T _{stg}	Storage Temperature			-40~+125	°C
V _{ISO}	Isolation Breakdown Voltage (R.M.S.)		A.C.1minute	2500	V
	Mounting Torque	Mounting (M6)	Recommended Value 2.5~3.9 (25~40)	4.7 (48)	N·m (kgf·cm)
		Terminal (M5)	Recommended Value 1.5~2.5 (15~25)	2.7 (28)	
	Mass			170	g

Electrical Characteristics

Symbol	Item	Conditions	Ratings	Unit
I _{RRM}	Repetitive Peak Reverse Current, max.	at V _{DRM} , single phase, half wave. T _j =150°C	30	mA
V _{FM}	Forward Voltage Drop, max.	Forward current 320A, T _j =25°C, Inst. measurement	1.25	V
R _{th(j-c)}	Thermal Impedance, max.	Junction to case	0.30	°C/W

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

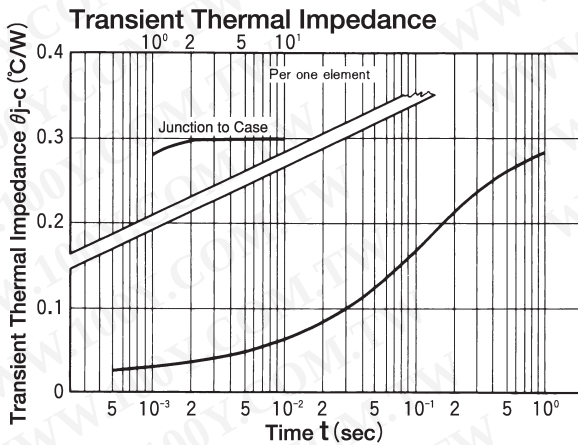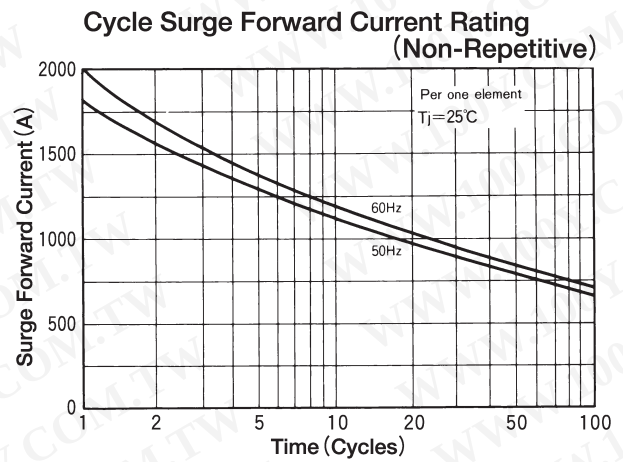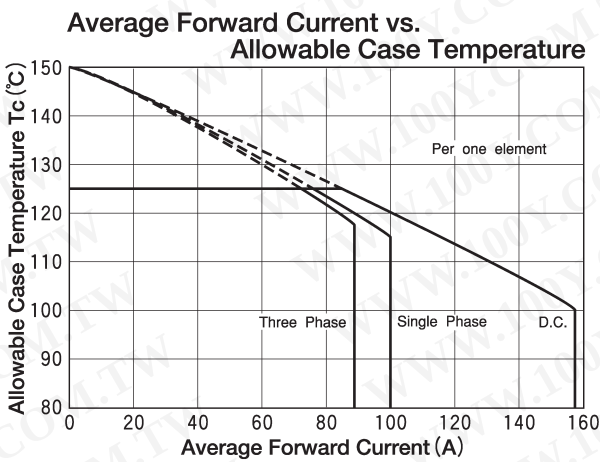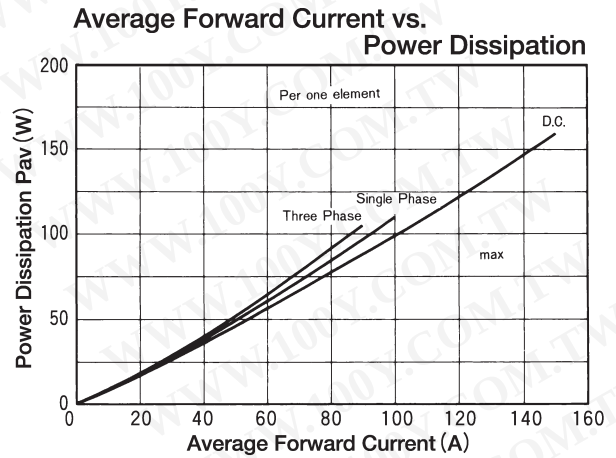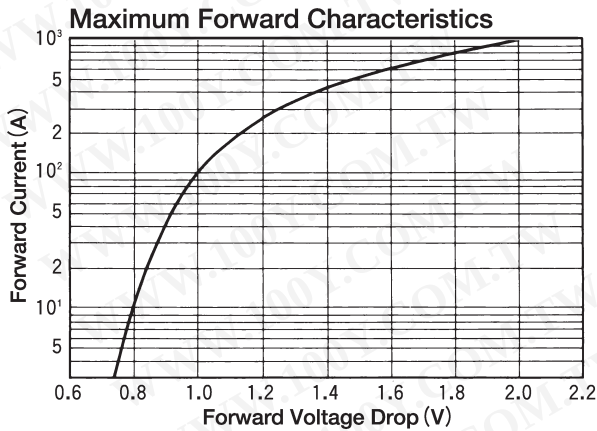

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

