

TOSHIBA Transistor Silicon NPN Triple Diffused Type

2SC3405

Switching Regulator and High Voltage Switching Applications

Industrial Applications


Unit: mm

High Speed DC-DC Converter Applications

- Excellent switching times: $t_r = 1.0 \mu s$ (max)
 $t_f = 1.0 \mu s$ (max), ($I_C = 0.3 A$)
- High collector breakdown voltage: $V_{CEO} = 800 V$

Absolute Maximum Ratings ($T_a = 25^\circ C$)

Characteristics		Symbol	Rating	Unit
Collector-base voltage		V_{CBO}	900	V
Collector-emitter voltage		V_{CEO}	800	V
Emitter-base voltage		V_{EBO}	8	V
Collector current	DC	I_C	0.8	A
	Pulse	I_{CP}	1.5	
Base current		I_B	0.2	A
Collector power dissipation	$T_a = 25^\circ C$	P_C	1.0	W
	$T_c = 25^\circ C$		20	
Junction temperature		T_j	150	$^\circ C$
Storage temperature range		T_{stg}	-55 to 150	$^\circ C$

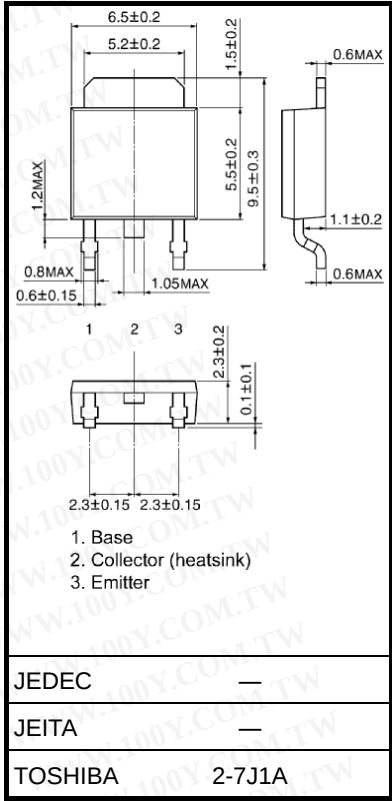


Weight: 0.36 g (typ.)


Note: Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings. Please design the appropriate reliability upon reviewing the Toshiba Semiconductor Reliability Handbook ("Handling Precautions"/"Derating Concept and Methods") and individual reliability data (i.e. reliability test report and estimated failure rate, etc).

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Electrical Characteristics (Ta = 25°C)

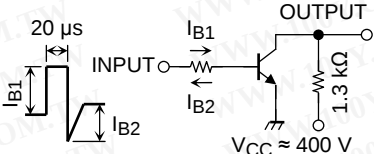Characteristics		Symbol	Test Condition	Min	Typ.	Max	Unit
Collector cut-off current		I_{CBO}	$V_{CB} = 800 \text{ V}, I_E = 0$	—	—	100	μA
Emitter cut-off current		I_{EBO}	$V_{EB} = 8 \text{ V}, I_C = 0$	—	—	1	mA
Collector-base breakdown voltage		$V \text{ (BR) CBO}$	$I_C = 1 \text{ mA}, I_E = 0$	900	—	—	V
Collector-emitter breakdown voltage		$V \text{ (BR) CEO}$	$I_C = 10 \text{ mA}, I_B = 0$	800	—	—	V
DC current gain		h_{FE}	$V_{CE} = 5 \text{ V}, I_C = 1 \text{ mA}$	6	—	—	
			$V_{CE} = 5 \text{ V}, I_C = 0.3 \text{ A}$	10	—	—	
Collector-emitter saturation voltage		$V_{CE \text{ (sat)}}$	$I_C = 0.3 \text{ A}, I_B = 0.06 \text{ A}$	—	—	0.5	V
Base-emitter saturation voltage		$V_{BE \text{ (sat)}}$	$I_C = 0.3 \text{ A}, I_B = 0.06 \text{ A}$	—	—	1.2	V
Switching time	Rise time	t_r		—	—	1.0	μs
	Storage time	t_{stg}		—	—	4.0	
	Fall time	t_f		$I_{B1} = -I_{B2} = 0.06 \text{ A},$ $\text{DUTY CYCLE} \leq 1\%$	—	—	

Marking






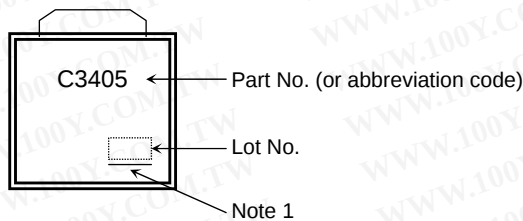




Note 1: A line under a Lot No. identifies the indication of product Labels.

Not underlined: $[[Pb]]/INCLUDES > MCV$

Underlined: $[[G]]/RoHS \text{ COMPATIBLE}$ or $[[G]]/RoHS [[Pb]]$

Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. The RoHS is the Directive 2002/95/EC of the European Parliament and of the Council of 27 January 2003 on the restriction of the use of certain hazardous substances in electrical and electronic equipment.

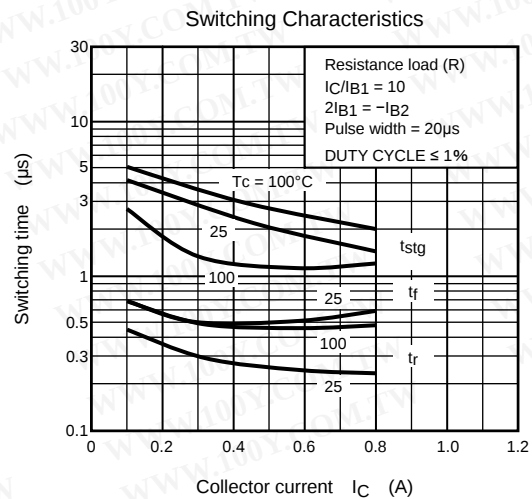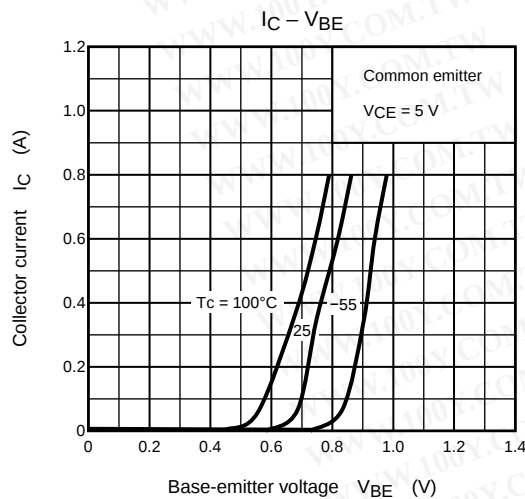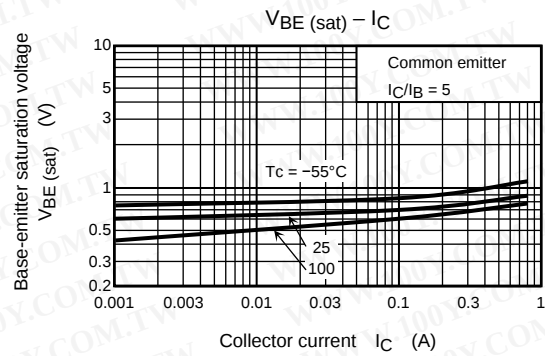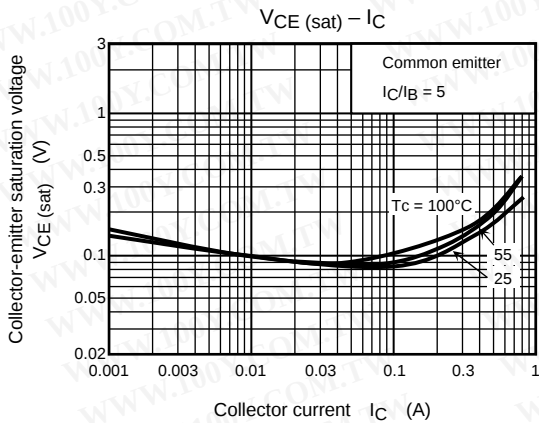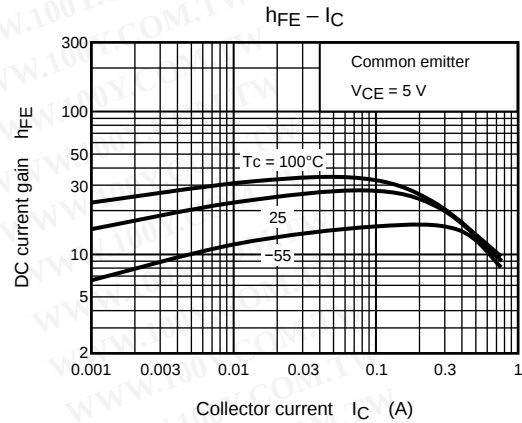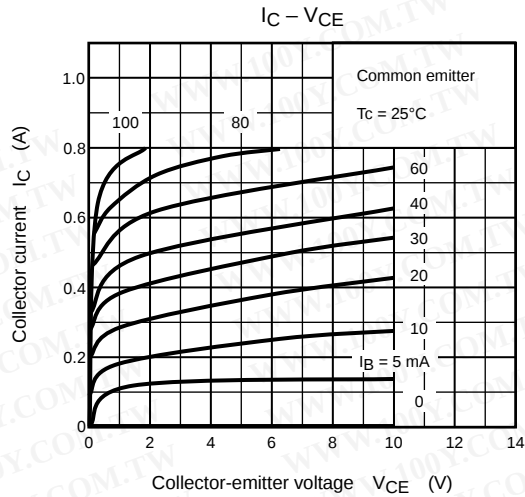

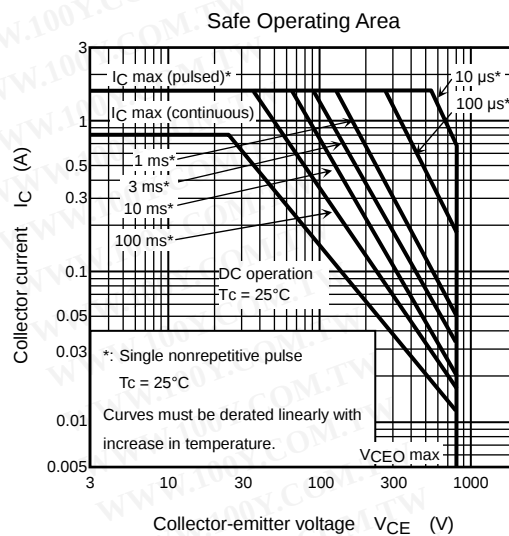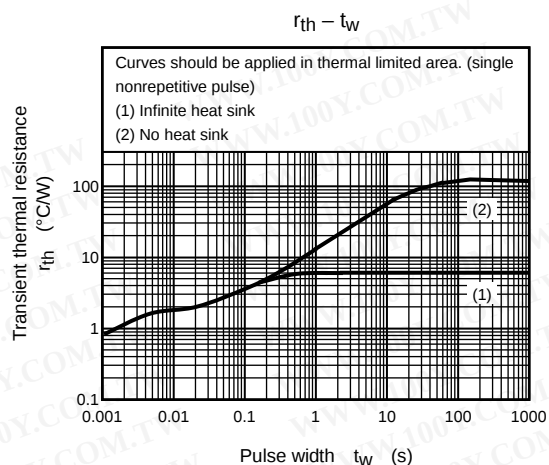

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)