



Standard Recovery Diodes (Stud Version), 70 A



DO-203AB (DO-5)

FEATURES

- High surge current capability
- Designed for a wide range of applications
- Stud cathode and stud anode version
- Leaded version available
- Types up to 1600 V V_{RRM}
- Compliant to RoHS directive 2002/95/EC
- Designed and qualified for industrial level



RoHS
COMPLIANT

TYPICAL APPLICATIONS

- Converters
- Power supplies
- Machine tool controls
- Battery charges

PRODUCT SUMMARY

$I_{F(AV)}$

70 A

MAJOR RATINGS AND CHARACTERISTICS

PARAMETER	TEST CONDITIONS	70HF(R)		UNITS
		10 TO 120	140/160	
I _{F(AV)}		70	70	A
	T _C	140	110	°C
I _{F(RMS)}		110		A
I _{FSM}	50 Hz	1200		A
	60 Hz	1250		
I ² _t	50 Hz	7100		A ² s
	60 Hz	6450		
V _{RRM}	Range	100 to 1200	1400/1600	V
T _J		- 65 to 180	- 65 to 150	°C

ELECTRICAL SPECIFICATIONS

VOLTAGE RATINGS

TYPE NUMBER	VOLTAGE CODE	V_{RRM} , MAXIMUM REPETITIVE PEAK REVERSE VOLTAGE V	V_{RSM} , MAXIMUM NON-REPETITIVE PEAK REVERSE VOLTAGE V	$V_{R(BR)}$, MINIMUM AVALANCHE VOLTAGE V	I_{RRM} MAXIMUM AT $T_J = T_J$ MAXIMUM mA
70HF(R)	10	100	200	200	15
	20	200	300	300	
	40	400	500	500	
	60	600	720	725	9
	80	800	960	950	
	100	1000	1200	1150	
	120	1200	1440	1350	4.5
	140	1400	1650	1550	
	160	1600	1900	1750	

70HF(R) Series

Vishay High Power Products Standard Recovery Diodes
(Stud Version), 70 A



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

FORWARD CONDUCTION					
PARAMETER	SYMBOL	TEST CONDITIONS			UNITS
			70HF(R)		
			10 TO 120	140/160	
Maximum average forward current at case temperature	$I_{F(AV)}$	180° conduction, half sine wave	70		A
Maximum RMS forward current	$I_{F(RMS)}$		140	110	°C
Maximum peak, one cycle forward, non-repetitive surge current	I_{FSM}	$t = 10 \text{ ms}$ $t = 8.3 \text{ ms}$ $t = 10 \text{ ms}$ $t = 8.3 \text{ ms}$	No voltage reappplied	1200	A
			100 % V_{RRM} reappplied	1250	
			Sinusoidal half wave, initial $T_J = T_J \text{ maximum}$	1000	
				1050	
Maximum I^2t for fusing	I^2t	$t = 10 \text{ ms}$ $t = 8.3 \text{ ms}$ $t = 10 \text{ ms}$ $t = 8.3 \text{ ms}$	No voltage reappplied	7100	A^2s
			100 % V_{RRM} reappplied	6450	
				5000	
				4550	
Maximum $I^2\sqrt{t}$ for fusing	$I^2\sqrt{t}$	$t = 0.1 \text{ ms to } 10 \text{ ms}$, no voltage reappplied	71 000		$A^2\sqrt{s}$
Low level value of threshold voltage	$V_{F(TO)1}$	$(16.7 \% \times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)})$, $T_J = T_J \text{ maximum}$	0.79		V
High level value of threshold voltage	$V_{F(TO)2}$	$(I > \pi \times I_{F(AV)})$, $T_J = T_J \text{ maximum}$	1.00		
Low level value of forward slope resistance	r_{f1}	$(16.7 \% \times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)})$, $T_J = T_J \text{ maximum}$	2.33		$m\Omega$
High level value of forward slope resistance	r_{f2}	$(I > \pi \times I_{F(AV)})$, $T_J = T_J \text{ maximum}$	1.53		
Maximum forward voltage drop	V_{FM}	$I_{pk} = 220 \text{ A}$, $T_J = 25^\circ\text{C}$, $t_p = 400 \mu\text{s}$ rectangular wave	1.35	1.46	V

THERMAL AND MECHANICAL SPECIFICATIONS					
PARAMETER	SYMBOL	TEST CONDITIONS			UNITS
			70HF(R)		
			10 TO 120	140/160	
Maximum junction and storage temperature range	T_J, T_{Stg}		- 65 to 180	- 65 to 150	°C
Maximum thermal resistance, junction to case	R_{thJC}	DC operation	0.45		K/W
Thermal resistance, case to heatsink	R_{thCS}	Mounting surface, smooth, flat and greased	0.25		
Maximum allowable mounting torque (+ 0 %, - 10 %)		Not lubricated thread, tightening on nut ⁽¹⁾	3.4 (30)		N · m (lbf · in)
		Lubricated thread, tightening on nut ⁽¹⁾	2.3 (20)		
		Not lubricated thread, tightening on hexagon ⁽²⁾	4.2 (37)		
		Lubricated thread, tightening on hexagon ⁽²⁾	3.2 (28)		
Approximate weight			17		g
			0.6		oz.
Case style		See dimensions - link at the end of datasheet	DO-203AB (DO-5)		

Notes

(1) Recommended for pass-through holes

(2) Recommended for holed threaded heatsinks



70HF(R) Series

Standard Recovery Diodes Vishay High Power Products
(Stud Version), 70 A

ΔR_{thJC} CONDUCTION				
CONDUCTION ANGLE	SINUSOIDAL CONDUCTION	RECTANGULAR CONDUCTION	TEST CONDITIONS	UNITS
180°	0.08	0.06	$T_J = T_J \text{ maximum}$	K/W
120°	0.10	0.11		
90°	0.13	0.14		
60°	0.19	0.20		
30°	0.30	0.30		

Note

- The table above shows the increment of thermal resistance R_{thJC} when devices operate at different conduction angles than DC

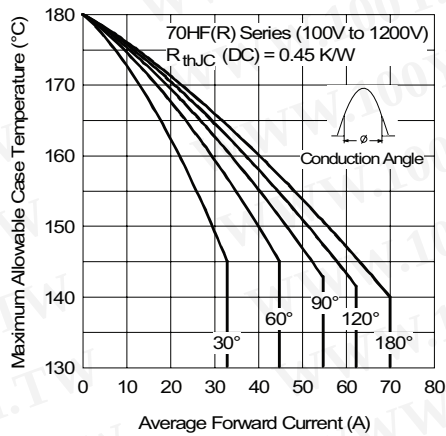


Fig. 1 - Current Ratings Characteristics

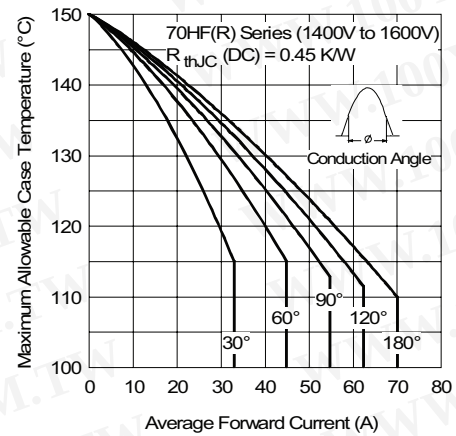


Fig. 3 - Current Ratings Characteristics

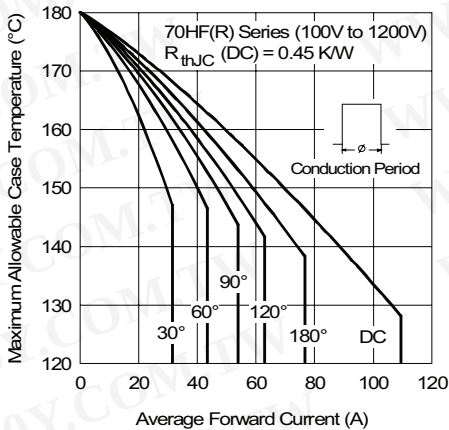


Fig. 2 - Current Ratings Characteristics

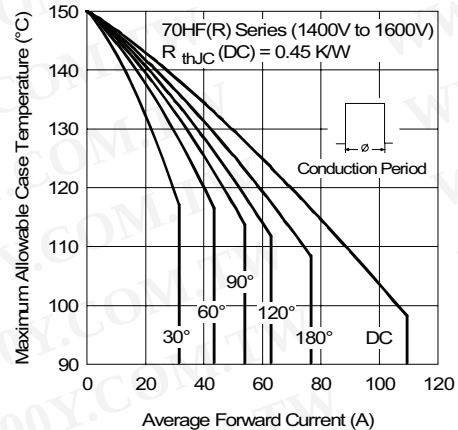


Fig. 4 - Current Ratings Characteristics

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

70HF(R) Series

Vishay High Power Products Standard Recovery Diodes
(Stud Version), 70 A

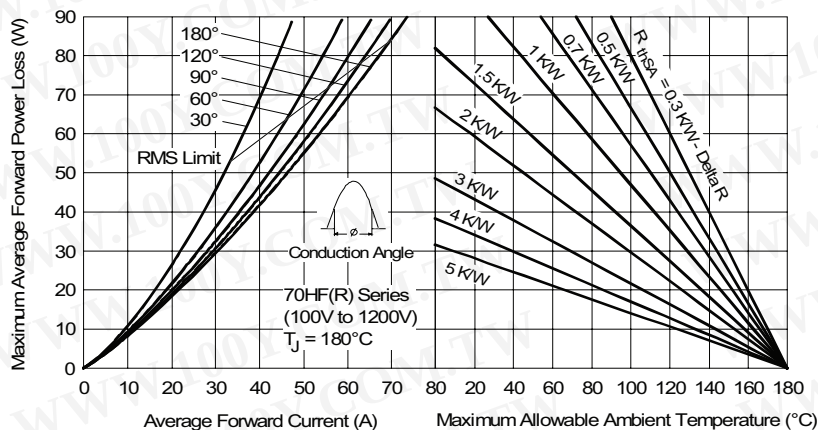


Fig. 5 - Forward Power Loss Characteristics

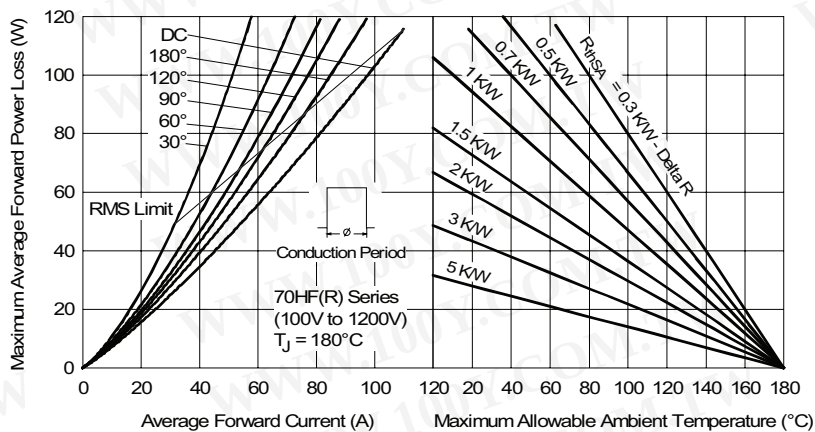


Fig. 6 - Forward Power Loss Characteristics

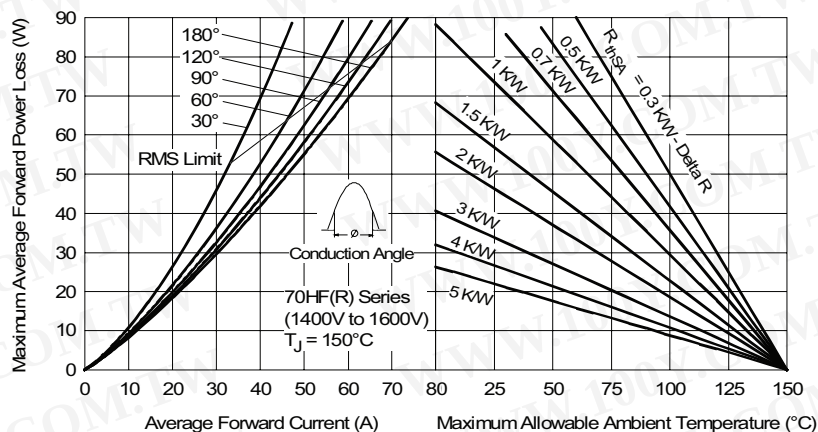


Fig. 7 - Forward Power Loss Characteristics

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

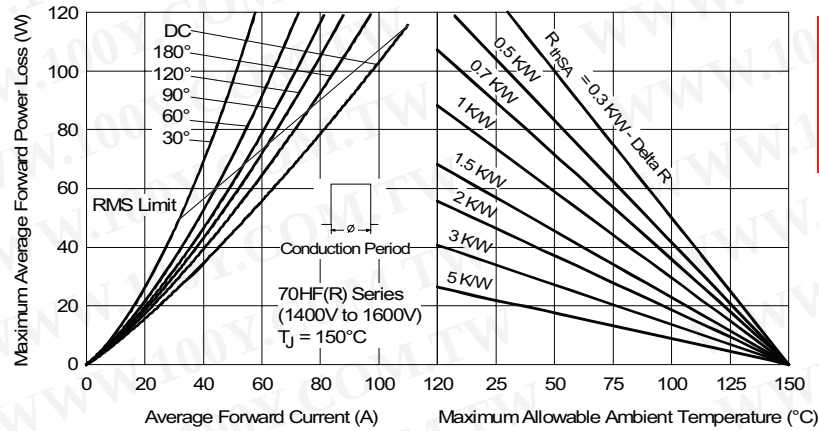


Fig. 8 - Forward Power Loss Characteristics

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

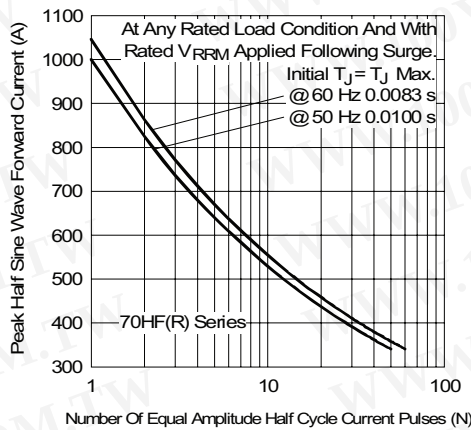


Fig. 9 - Maximum Non-Repetitive Surge Current

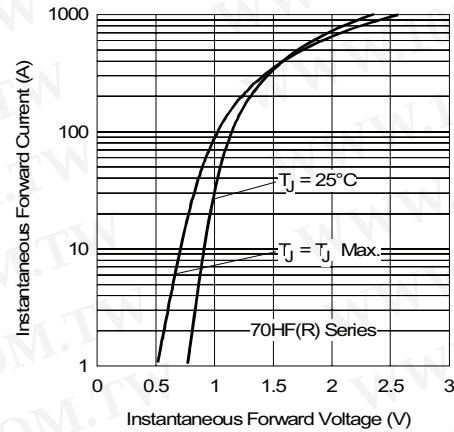


Fig. 11 - Forward Voltage Drop Characteristics

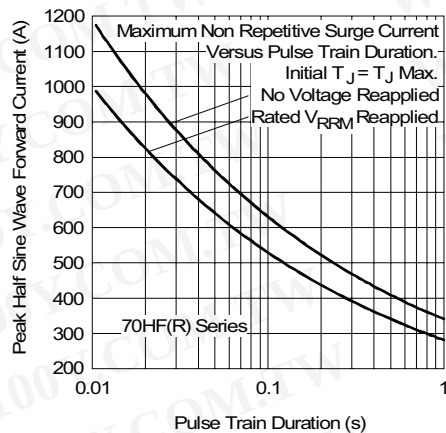


Fig. 10 - Maximum Non-Repetitive Surge Current

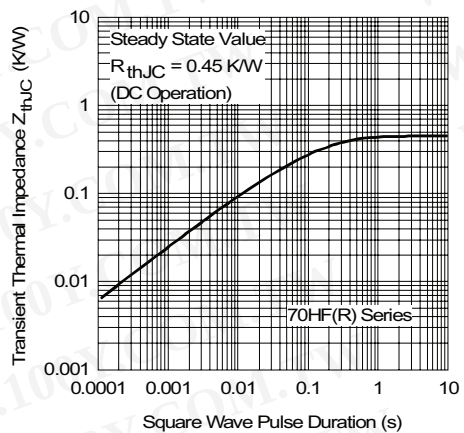


Fig. 12 - Thermal Impedance Z_{thJC} Characteristics

70HF(R) Series

Vishay High Power Products Standard Recovery Diodes
(Stud Version), 70 A

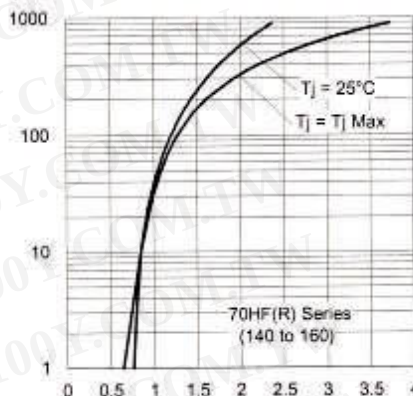


Fig. 13 - Forward Voltage Drop Characteristics

ORDERING INFORMATION TABLE

Device code	70	HF	R	160	M
	①	②	③	④	⑤
①	- 70 = Standard device 71 = Not isolated lead 72 = Isolated lead with silicone sleeve (red = Reverse polarity) (blue = Normal polarity)				
②	- HF = Standard diode				
③	- • None = Stud normal polarity (cathode to stud) • R = Stud reverse polarity (anode to stud)				
④	- Voltage code x 10 = V_{RRM} (see Voltage Ratings table)				
⑤	- • None = Stud base DO-203AB (DO-5) 1/4" 28UNF-2A • M = Stud base DO-203AB (DO-5) M6 x 1				


LINKS TO RELATED DOCUMENTS	
Dimensions	www.vishay.com/doc?95343

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



DO-203AB (DO-5) for 70HF(R) and 71HF(R) Series

DIMENSIONS FOR 70HF(R) SERIES in millimeters (inches)

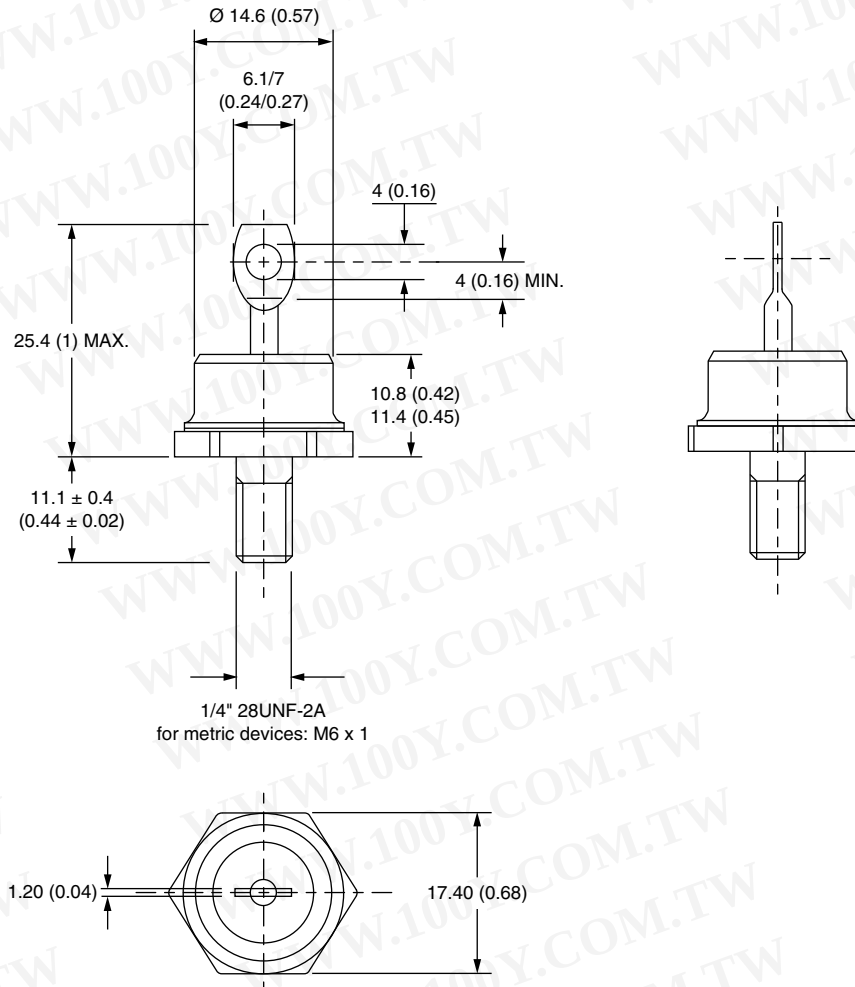

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


Outline Dimensions

Vishay Semiconductors

DO-203AB (DO-5) for 70HF(R)
and 71HF(R) Series



DIMENSIONS FOR 71HF(R) SERIES in millimeters (inches)

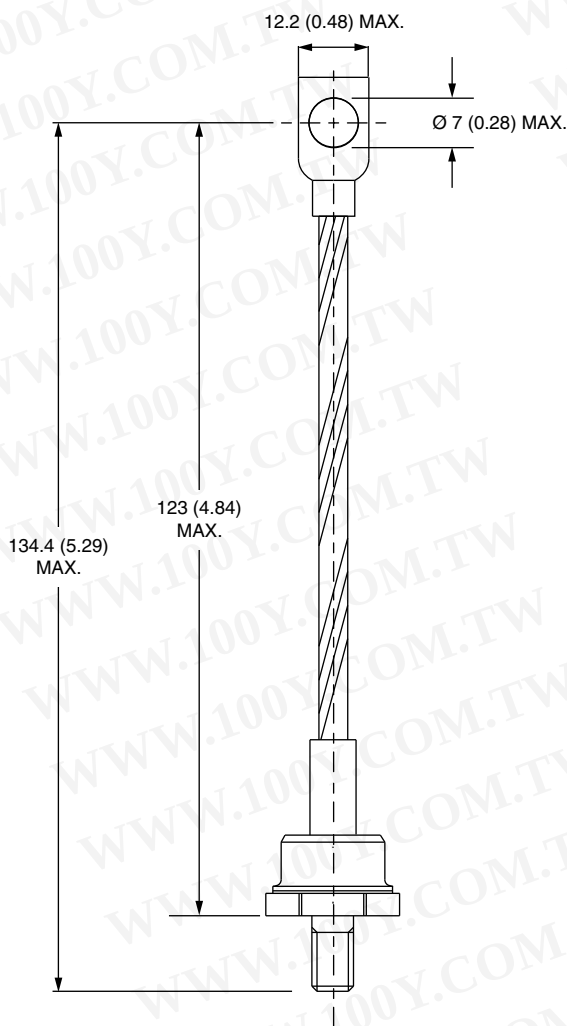

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)