



勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
 Http://www.100y.com.tw

New Product

SMA6J5.0A thru SMA6J28A

Vishay General Semiconductor

Surface Mount Transient Voltage Suppressors



DO-214AC (SMA)

PRIMARY CHARACTERISTICS

V_{WM}	5.0 V to 28 V
P_{PPM} (10 x 1000 μ s)	600 W
P_{PPM} (8 x 20 μ s)	4000 W
P_D at $T_A = 50^\circ\text{C}$	4 W
I_{FSM}	50 A
T_J max.	150 $^\circ\text{C}$

FEATURES

- Low profile package
- Ideal for automated placement
- Available in uni-directional polarity only
- Excellent clamping capability
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260 $^\circ\text{C}$
- Solder dip 260 $^\circ\text{C}$, 40 s
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC



RoHS
COMPLIANT

TYPICAL APPLICATIONS

Use in sensitive electronics protection against voltage transients induced by inductive load switching and lighting on ICs, MOSFET, signal lines of sensor units for consumer, computer, industrial, automotive and telecommunication.

MECHANICAL DATA

Case: DO-214AC (SMA)

Molding compound meets UL 94 V-0 flammability rating

Base P/N-E3 - RoHS compliant, commercial grade

Terminals: Matte tin plated leads, solderable per J-STD-002 and JESD22-B102

E3 suffix meets JESD 201 class 1A whisker test

Polarity: Color band denotes cathode end

MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	VALUE	UNIT
Peak pulse power dissipation with 10/1000 μ s waveform ⁽¹⁾⁽²⁾ with 8/20 μ s waveform	P_{PPM}	600 4000	W
Peak pulse current with 10/1000 μ s waveform ⁽¹⁾⁽²⁾ with 8/20 μ s waveform	I_{PPM}	See next table	A
Power dissipation on infinite heatsink, $T_A = 50^\circ\text{C}$	P_D	4.0	W
Peak forward surge current 8.3 ms single half sine-wave	I_{FSM}	50	A
Operating junction and storage temperature range	T_J, T_{STG}	- 55 to + 150	$^\circ\text{C}$

Notes:

(1) Non-repetitive current pulse, per Fig. 1 and derated above $T_A = 25^\circ\text{C}$ per Fig. 2.

(2) Mounted on P.C.B. with 5.0 x 5.0 mm copper pads attached to each terminal


SMA6J5.0A thru SMA6J28A

Vishay General Semiconductor



ELECTRICAL CHARACTERISTICS

SYMBOL	PARAMETER
V_{WM}	Stand-off voltage
V_{BR}	Breakdown voltage
V_C	Clamping voltage
I_D	Leakage current at V_{WM}
I_{PP}	Peak pulse current
αT	Voltage temperature coefficient
V_F	Forward voltage drop
R_D	Dynamic resistance

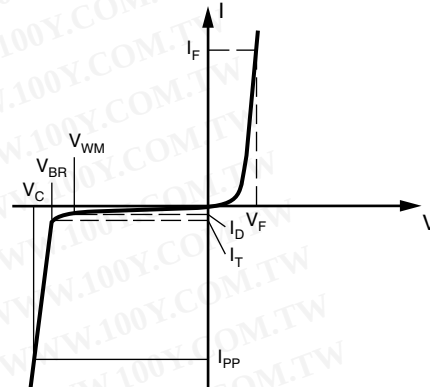ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

DEVICE	DEVICE MARKING CODE	BREAKDOWN VOLTAGE V _{BR} AT I _T ⁽¹⁾			MAXIMUM REVERSE LEAKAGE I _D AT V _{WM}			V _C AT I _{PP}		R _D ⁽²⁾	V _C AT I _{PP}		R _D ⁽²⁾	αT ⁽³⁾
		MIN.	MAX.		25 °C	85 °C		10/1000 μs			8/20 μs			
								MAX.			MAX.			
V		mA	μA	V	V	A	Ω	V	A	Ω	10 ⁻⁴ /°C			
SMA6J5.0A	6AE	6.40	7.07	10	150	375	5.0	9.1	65.9	0.031	13.4	298	0.021	5.7
SMA6J6.0A	6AG	6.70	7.41	10	600	1500	6.0	9.5	63.2	0.033	13.7	290	0.022	5.9
SMA6J6.5A	6AK	7.20	7.96	10	100	250	6.5	10.2	58.8	0.038	14.5	276	0.024	6.1
SMA6J7.5A	6AP	8.33	9.21	1	50	125	7.5	11.8	50.8	0.051	17.0	235	0.033	6.5
SMA6J8.0A	6AR	8.89	9.83	1	20	50	8.0	12.5	48.0	0.056	18.2	220	0.038	7.0
SMA6J8.5A	6AT	9.4	10.4	1	20	50	8.5	13.3	45.1	0.064	18.7	205	0.040	7.3
SMA6J10A	6AX	11.1	12.3	1	0.2	1	10	15.7	38.2	0.089	19.6	184	0.040	7.8
SMA6J11A	6AZ	12.2	13.5	1	0.2	1	11	17.2	34.8	0.107	21.5	172	0.047	8.1
SMA6J12A	6BE	13.3	14.7	1	0.2	1	12	18.8	31.9	0.128	23.5	157	0.056	8.3
SMA6J13A	6BG	14.4	15.9	1	0.2	1	13	20.4	29.4	0.153	23.9	147	0.054	8.4
SMA6J15A	6BM	16.7	18.5	1	0.2	1	15	23.6	25.4	0.201	27.7	123	0.075	8.8
SMA6J16A	6BP	17.8	19.7	1	0.2	1	16	25.2	23.8	0.229	29.5	119	0.083	8.8
SMA6J17A	6BR	18.9	20.9	1	0.2	1	17	26.7	22.5	0.259	31.4	111	0.094	9.0
SMA6J18A	6BT	20.0	22.1	1	0.2	1	18	28.3	21.2	0.292	33.2	102	0.109	9.2
SMA6J20A	6BV	22.2	24.5	1	0.2	1	20	31.4	19.1	0.361	36.8	93	0.132	9.4
SMA6J22A	6BX	24.4	26.9	1	0.2	1	22	34.5	17.4	0.437	40.4	89	0.152	9.5
SMA6J24A	6BZ	26.7	29.5	1	0.2	1	24	37.8	15.9	0.523	44.3	80	0.185	9.6
SMA6J26A	6CE	28.9	31.9	1	0.2	1	26	40.9	14.7	0.614	47.9	75	0.213	9.7
SMA6J28A	6CG	31.1	34.4	1	0.2	1	28	44.0	13.6	0.704	51.6	68	0.253	9.8

Notes:

- (1) Pulse test: $t_p \leq 50$ ms
- (2) To calculate maximum clamping voltage at other surge currents, use the following formula
 $V_{CLmax} = R_D \times I_{PP} + V_{BRmax}$
- (3) To calculate V_{BR} vs. junction temperature, use the following formula
 V_{BR} at $T_J = V_{BR}$ at $25^\circ\text{C} \times (1 + \alpha T \times (T_J - 25))$
- (4) $V_F = 3.5$ V at $I_F = 25$ A, pulse test: 300 μs pulse width

**THERMAL CHARACTERISTICS** ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	VALUE	UNIT
Typical thermal resistance, junction to ambient ⁽¹⁾	$R_{\theta JA}$	120	$^\circ\text{C/W}$
Typical thermal resistance, junction to lead	$R_{\theta JL}$	25	$^\circ\text{C/W}$

Note:

(1) Mounted on minimum recommended pad layout

ORDERING INFORMATION (Example)

PREFERRED P/N	UNIT WEIGHT (g)	PREFERRED PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
SMA6J5.0A-E3/61	0.064	61	1800	7" diameter plastic tape and reel
SMA6J5.0A-E3/5A	0.064	5A	7500	13" diameter plastic tape and reel

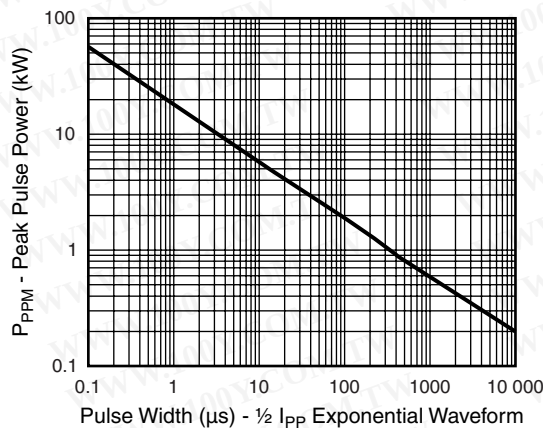
RATINGS AND CHARACTERISTICS CURVES($T_A = 25^\circ\text{C}$ unless otherwise noted)

Figure 1. Peak Pulse Power Rating Curve

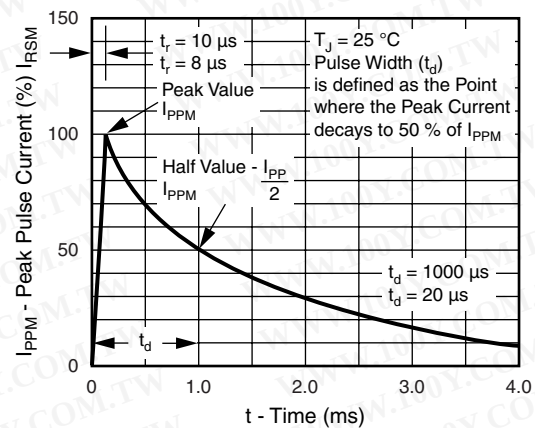


Figure 3. Pulse Waveform

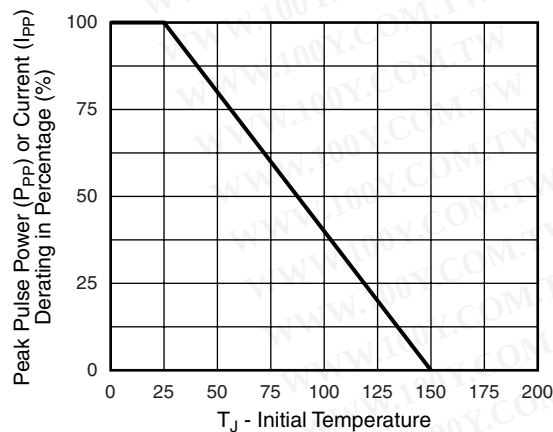


Figure 2. Pulse Power or Current vs. Initial Junction Temperature

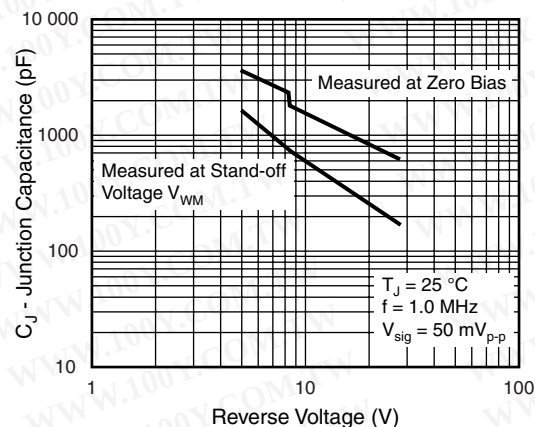


Figure 4. Typical Junction Capacitance

SMA6J5.0A thru SMA6J28A

Vishay General Semiconductor

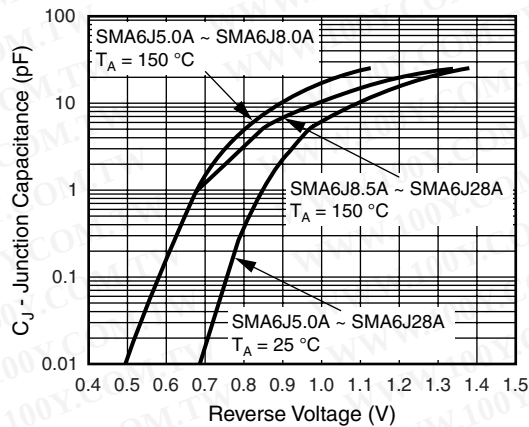


Figure 5. Typical Forward Characteristics



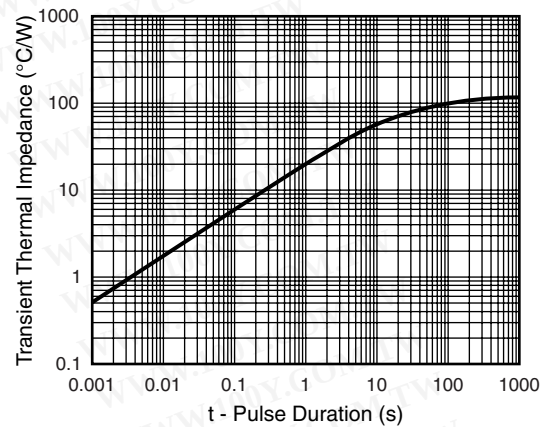


Figure 6. Typical Transient Thermal Impedance

PACKAGE OUTLINE DIMENSIONS in inches (millimeters)**DO-214AC (SMA)****Mounting Pad Layout**

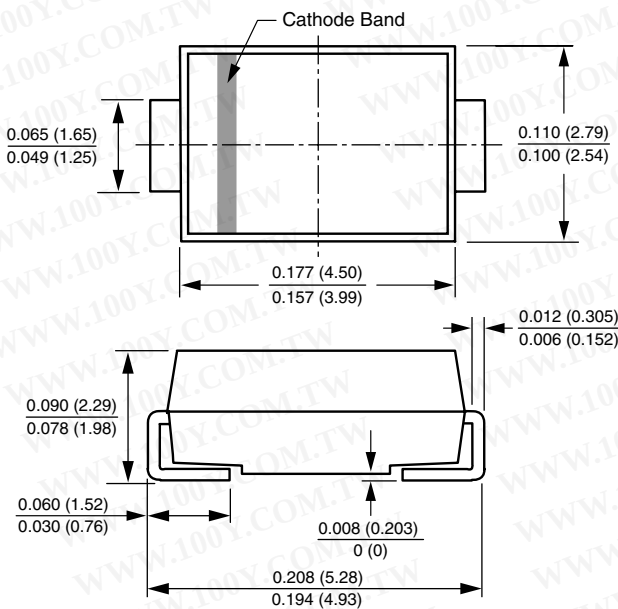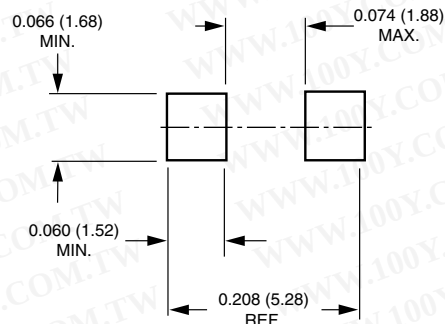

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Material Category Policy

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.

Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.