

ADD-A-PAK Generation VII Power Modules Thyristor/Diode and Thyristor/Thyristor, 95 A



ADD-A-PAK

FEATURES

- High voltage
- Industrial standard package
- UL pending
- 3500 V_{RMS} isolating voltage
- Low thermal resistance
- Totally lead (Pb)-free
- Designed and qualified for industrial level



RoHS
COMPLIANT

PRODUCT SUMMARY

$I_{T(AV)}$ or $I_{F(AV)}$	95 A
----------------------------	------

MECHANICAL DESCRIPTION

The ADD-A-PAK Generation VII, new generation of ADD-A-PAK module, combines the excellent thermal performances obtained by the usage of exposed direct bonded copper substrate, with advanced compact simple package solution and simplified internal structure with minimized number of interfaces.

BENEFITS

- Excellent thermal performances obtained by the usage of exposed direct bonded copper substrate
- Up to 1600 V
- High surge capability
- Easy mounting on heatsink

ELECTRICAL DESCRIPTION

These modules are intended for general purpose high voltage applications such as high voltage regulated power supplies, lighting circuits, temperature and motor speed control circuits, UPS and battery charger.


MAJOR RATINGS AND CHARACTERISTICS

SYMBOL	CHARACTERISTICS	VALUES	UNITS
$I_{T(AV)}$ or $I_{F(AV)}$	85 °C	95	A
$I_{O(RMS)}$	As AC switch	210	
I_{TSM} , I_{FSM}	50 Hz 60 Hz	2000 2094	
I^2t	50 Hz 60 Hz	20 18.26	kA ² s
$I^2\sqrt{t}$		200	kA ² √s
V_{RRM}	Range	400 to 1600	V
T_{Stg}		- 40 to 125	°C
T_J			

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

ELECTRICAL SPECIFICATIONS

VOLTAGE RATINGS					
TYPE NUMBER	VOLTAGE CODE	V _{RRM} , MAXIMUM REPETITIVE PEAK REVERSE VOLTAGE V	V _{RSM} , MAXIMUM NON-REPETITIVE PEAK REVERSE VOLTAGE V	V _{DRM} , MAXIMUM REPETITIVE PEAK OFF-STATE VOLTAGE, GATE OPEN CIRCUIT V	I _{RRM} , I _{DRM} AT 125 °C mA
VSK.91	04	400	500	400	15
	06	600	700	600	
	08	800	900	800	
	10	1000	1100	1000	
	12	1200	1300	1200	
	14	1400	1500	1400	
	16	1600	1700	1600	

ON-STATE CONDUCTION						
PARAMETER	SYMBOL	TEST CONDITIONS			VALUES	UNITS
Maximum average on-state current (thyristors)	$I_{T(AV)}$	180° conduction, half sine wave, $T_C = 85\text{ }^{\circ}\text{C}$			95	A
Maximum average forward current (diodes)	$I_{F(AV)}$					
Maximum continuous RMS on-state current, as AC switch	$I_{O(RMS)}$				210	
Maximum peak, one-cycle non-repetitive on-state or forward current	I_{TSM} or I_{FSM}	t = 10 ms	No voltage reapplied	Sinusoidal half wave, initial $T_J = T_J$ maximum	2000	
		t = 8.3 ms			2094	
		t = 10 ms	100 % V_{RRM} reapplied		1682	
		t = 8.3 ms			1760	
Maximum I^2t for fusing	I^2t	t = 10 ms	No voltage reapplied	Initial $T_J = T_J$ maximum	20	kA ² s
		t = 8.3 ms			18.26	
		t = 10 ms	100 % V_{RRM} reapplied		14.14	
		t = 8.3 ms			12.91	
Maximum $I^2\sqrt{t}$ for fusing	$I^2\sqrt{t}$ (1)	t = 0.1 ms to 10 ms, no voltage reapplied $T_J = T_J$ maximum			200	kA ² √s
Maximum value or threshold voltage	$V_{T(TO)}$ (2)	Low level (3)	$T_J = T_J$ maximum		0.97	V
		High level (4)			1.1	
Maximum value of on-state slope resistance	r_t (2)	Low level (3)	$T_J = T_J$ maximum		2.76	mΩ
		High level (4)			2.38	
Maximum peak on-state or forward voltage	V_{TM}	$I_{TM} = \pi \times I_{T(AV)}$	$T_J = 25\text{ }^{\circ}\text{C}$		1.73	V
	V_{FM}	$I_{FM} = \pi \times I_{F(AV)}$				
Maximum non-repetitive rate of rise of turned on current	di/dt	$T_J = 25\text{ }^{\circ}\text{C}$, from 0.67 V_{DRM} , $I_{TM} = \pi \times I_{T(AV)}$, $I_g = 500\text{ mA}$, $t_r < 0.5\text{ }\mu\text{s}$, $t_p > 6\text{ }\mu\text{s}$			150	A/μs
Maximum holding current	I_H	$T_J = 25\text{ }^{\circ}\text{C}$, anode supply = 6 V, resistive load, gate open circuit			250	mA
Maximum latching current	I_L	$T_J = 25\text{ }^{\circ}\text{C}$, anode supply = 6 V, resistive load			400	

Notes

(1) I²t for time t_x = I²√t × √t_x(2) Average power = V_{T(TO)} × I_{T(AV)} + r_t × (I_{T(RMS)})²(3) 16.7 % × π × I_{AV} < I < π × I_{AV}(4) I > π × I_{AV}

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



ADD-A-PAK Generation VII Power Modules Vishay High Power Products
Thyristor/Diode and Thyristor/Thyristor, 95 A

TRIGGERING					
PARAMETER	SYMBOL	TEST CONDITIONS		VALUES	UNITS
Maximum peak gate power	P _{GM}			12	W
Maximum average gate power	P _{G(AV)}			3.0	
Maximum peak gate current	I _{GM}			3.0	A
Maximum peak negative gate voltage	- V _{GM}			10	V
Maximum gate voltage required to trigger	V _{GT}	T _J = - 40 °C	Anode supply = 6 V resistive load	4.0	
		T _J = 25 °C		2.5	
		T _J = 125 °C		1.7	
Maximum gate current required to trigger	I _{GT}	T _J = - 40 °C	Anode supply = 6 V resistive load	270	mA
		T _J = 25 °C		150	
		T _J = 125 °C		80	
Maximum gate voltage that will not trigger	V _{GD}	T _J = 125 °C, rated V _{DRM} applied		0.25	V
Maximum gate current that will not trigger	I _{GD}	T _J = 125 °C, rated V _{DRM} applied		6	mA

BLOCKING				
PARAMETER	SYMBOL	TEST CONDITIONS	VALUES	UNITS
Maximum peak reverse and off-state leakage current at V_{RRM} , V_{DRM}	I_{RRM} , I_{DRM}	$T_J = 125\text{ }^{\circ}\text{C}$, gate open circuit	15	mA
RMS insulation voltage	V_{INS}	50 Hz, 1 s	3500	V
Maximum critical rate of rise of off-state voltage	dV/dt	$T_J = 125\text{ }^{\circ}\text{C}$, linear to 0.67 V_{DRM}	1000	V/ μ s

THERMAL AND MECHANICAL SPECIFICATIONS				
PARAMETER	SYMBOL	TEST CONDITIONS	VALUES	UNITS
Junction operating and storage temperature range	T _J , T _{Stg}		- 40 to 125	°C
Maximum internal thermal resistance, junction to case per leg	R _{thJC}	DC operation	0.22	°C/W
Typical thermal resistance, case to heatsink per module	R _{thCS}	Mounting surface flat, smooth and greased	0.1	
Mounting torque ± 10 %	to heatsink	A mounting compound is recommended and the torque should be rechecked after a period of 3 hours to allow for the spread of the compound.	4	Nm
	busbar		3	
Approximate weight			75	g
			2.7	oz.
Case style		JEDEC	TO-240AA compatible	

ΔR CONDUCTION PER JUNCTION											
DEVICES	SINE HALF WAVE CONDUCTION					RECTANGULAR WAVE CONDUCTION					UNITS
	180°	120°	90°	60°	30°	180°	120°	90°	60°	30°	
VSK.91..	0.04	0.048	0.063	0.085	0.125	0.033	0.052	0.067	0.088	0.127	°C/W

Note

- Table shows the increment of thermal resistance R_{thJC} when devices operate at different conduction angles than DC

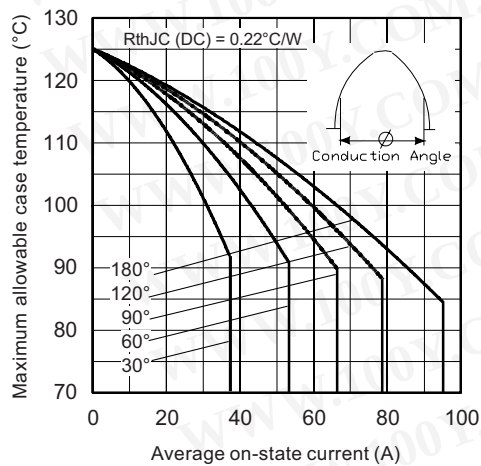


Fig. 1 - Current Ratings Characteristics

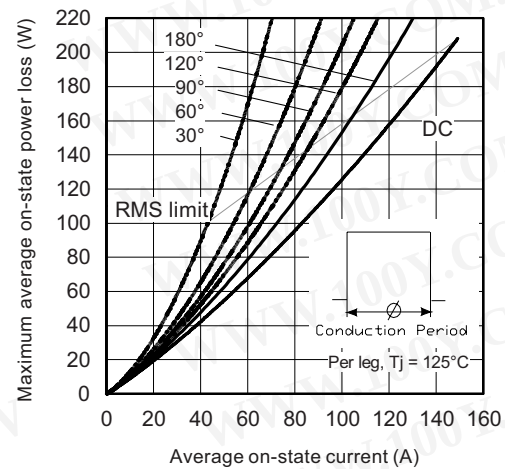


Fig. 4 - On-State Power Loss Characteristics

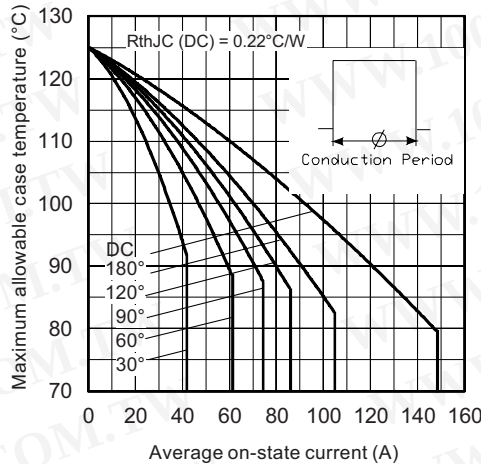


Fig. 2 - Current Ratings Characteristics

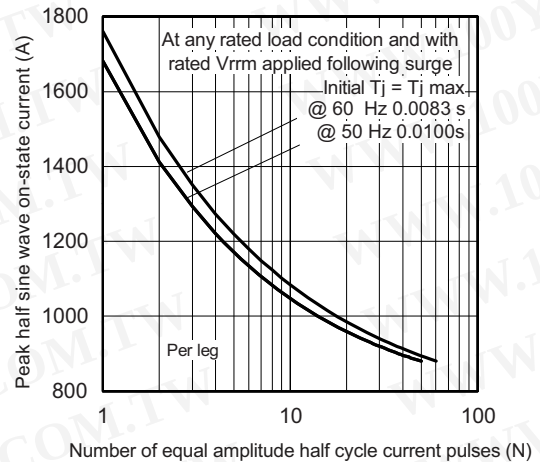


Fig. 5 - Maximum Non-Repetitive Surge Current

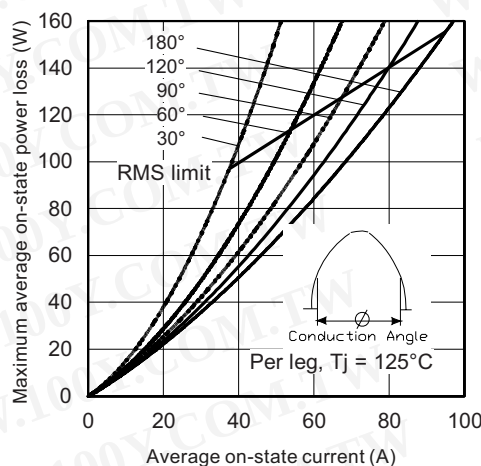


Fig. 3 - On-State Power Loss Characteristics

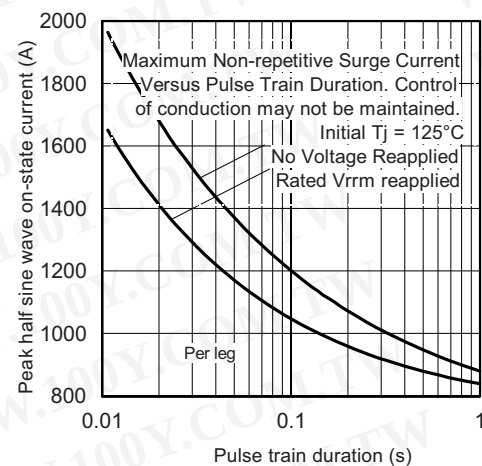


Fig. 6 - Maximum Non-Repetitive Surge Current



ADD-A-PAK Generation VII Power Modules Thyristor/Diode and Thyristor/Thyristor, 95 A

Vishay High Power Products

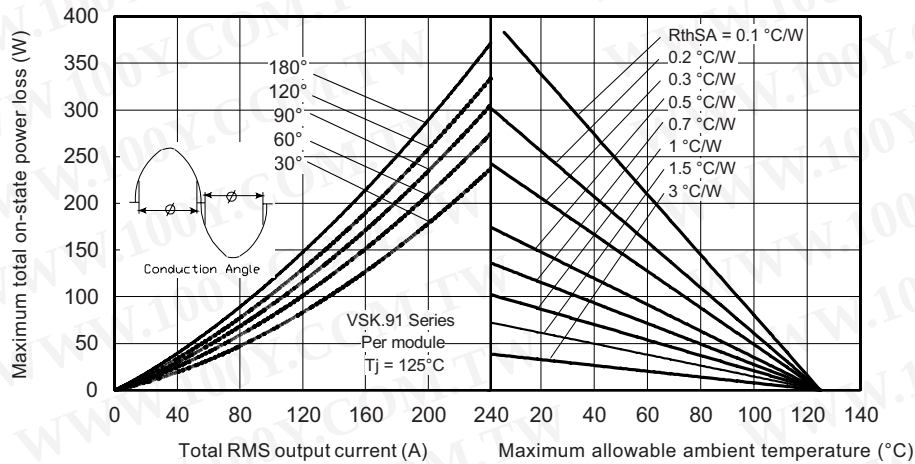


Fig. 7 - On-State Power Loss Characteristics

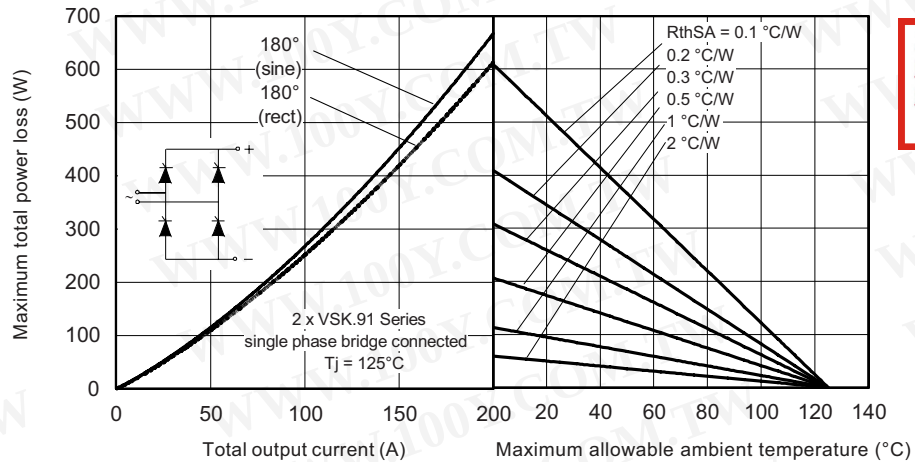


Fig. 8 - On-State Power Loss Characteristics

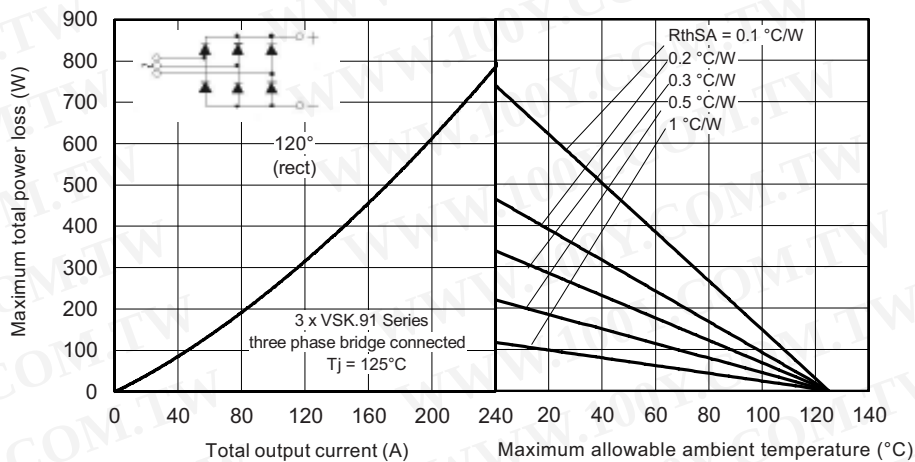


Fig. 9 - On-State Power Loss Characteristics

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

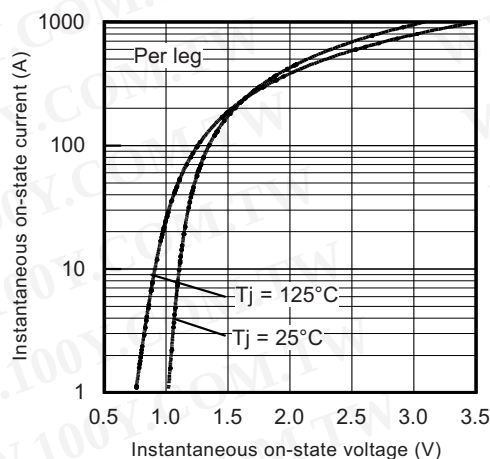


Fig. 10 - On-State Voltage Drop Characteristics

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

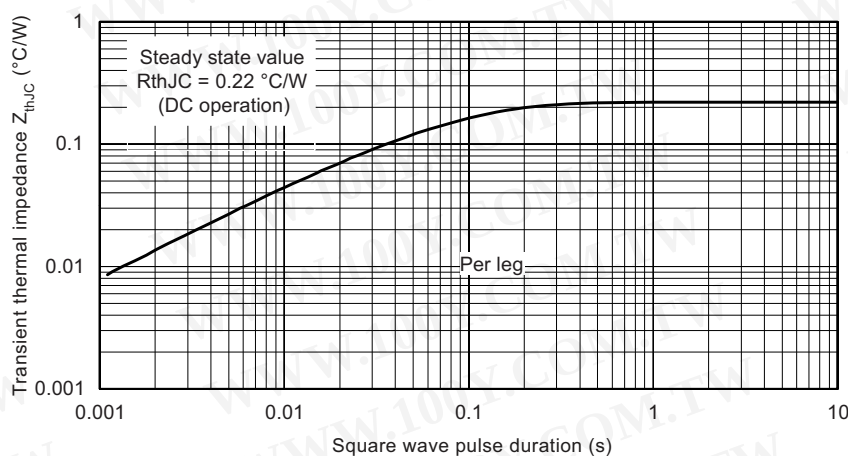


Fig. 11 - Thermal Impedance Z_{thJC} Characteristics

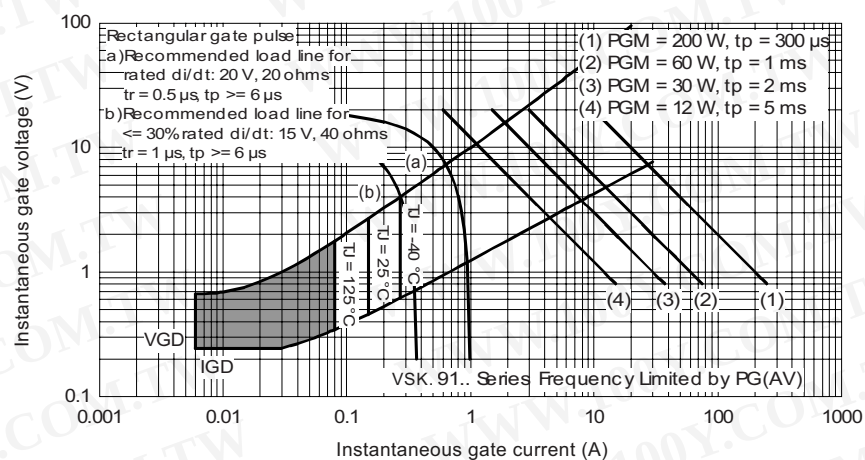


Fig. 12 - Gate Characteristics



ORDERING INFORMATION TABLE


Device code	VSK	T	91	/	16
	①	②	③		④

- ① - Module type
- ② - Circuit configuration (see end of datasheet)
- ③ - Current code (95 A)
- ④ - Voltage code (see Voltage Ratings table)

Note

- To order the optional hardware go to www.vishay.com/doc?95172

CIRCUIT CONFIGURATION

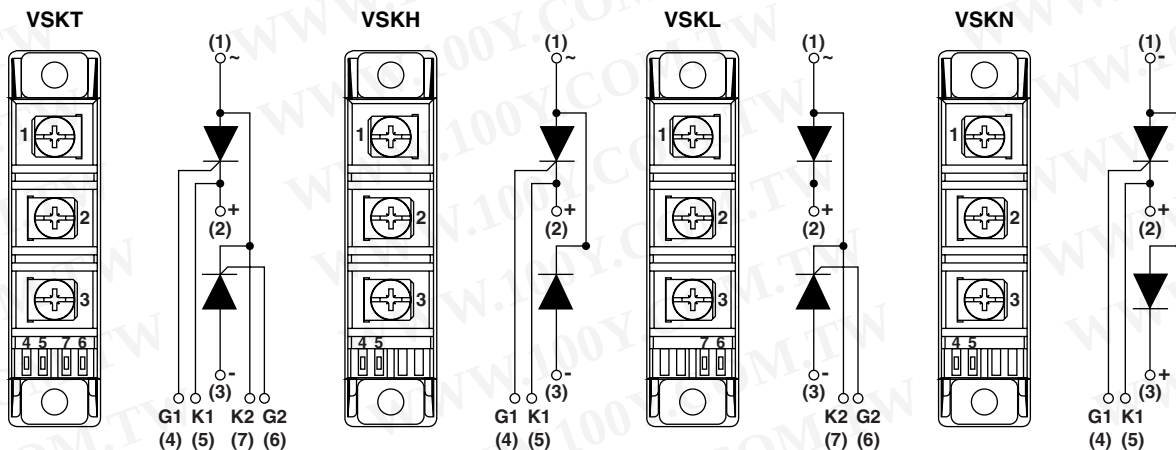

LINKS TO RELATED DOCUMENTS

Dimensions

<http://www.vishay.com/doc?95368>

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)