


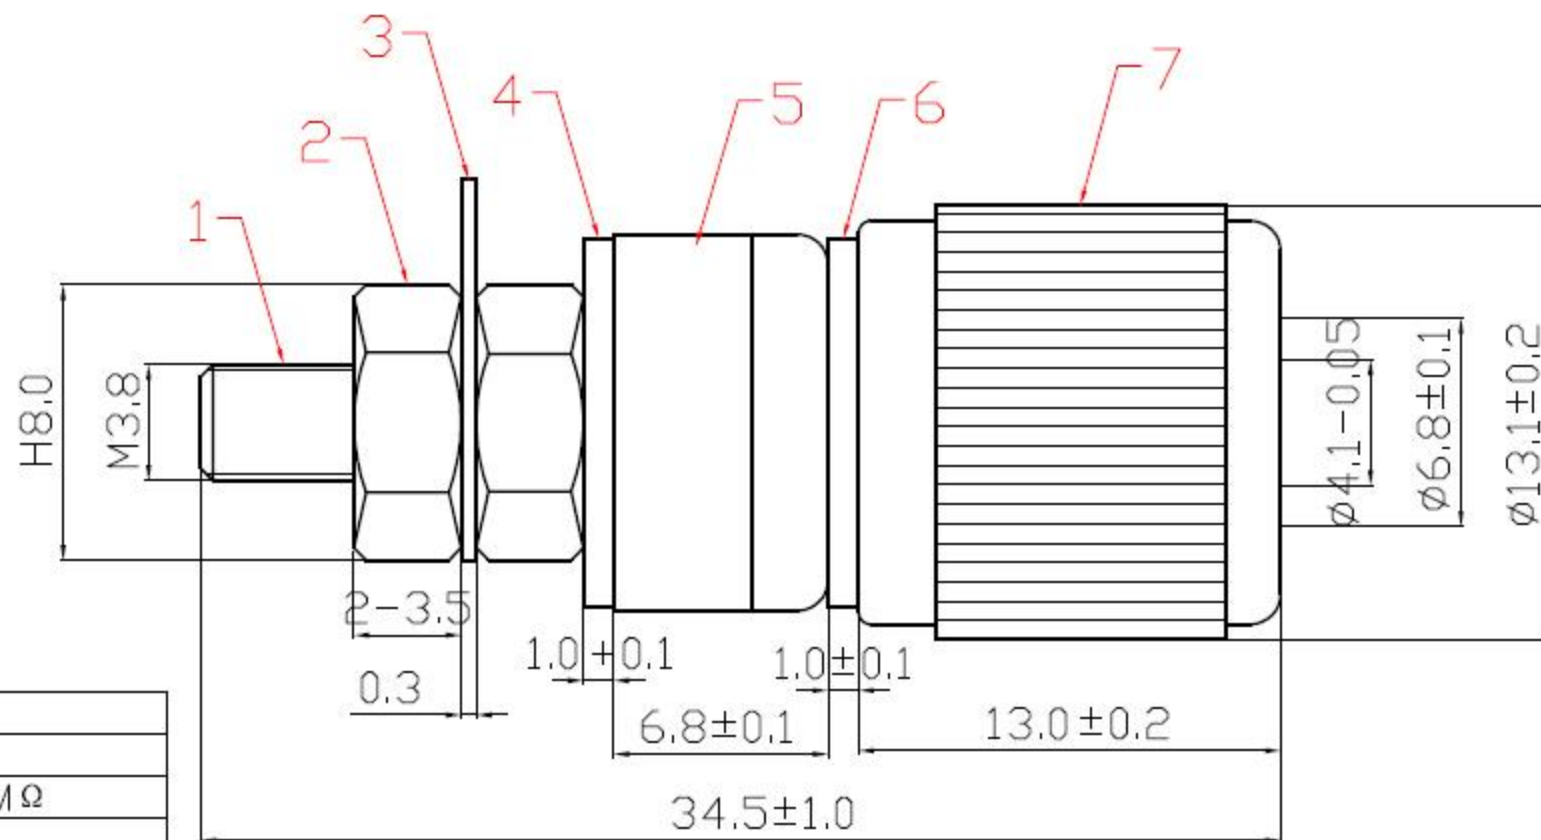

ELECTRICAL CHARACTERISTIC

(1)	CONTACT RESISTANCE: $\leq 20\text{m}\Omega$
(2)	INSULATION RESISTANCE: $\geq 10\text{M}\Omega$
(3)	WITHSTAND VOLTAGE: DC300V
(4)	CURRENT RATING: 5A/DC150V
(5)	OPERATING TEMPERATURE: $-30^{\circ}\text{C} \sim 60^{\circ}\text{C}$

7	SHELL	ABS
6	COPPER PATCH	Cu
5	PLASTIC HANDLE	ABS
4	WASHER	Cu
3	EARTHING PATCH	Cu
2	NUT	Zn
1	BODY	Cu

ITEM	DESIGNATION	MATERIAL	
REV	PART NO.& SAMPLE NO.	DATE	BY
A	3111		
B			

TOLERANCE

0 - 10	± 0.05
10 - 99	± 0.5
100 - 999	± 10.0
1000 - 9999	± 100.00
10000 - 99999	± 1000.00



SHEET

OF

SIGNATURES

DRAFT: cheng huan

CHECKED:

APPROVAL:

SCALE

UNIT

DATE

10.01.15

REV

Ø

www.100y.com.tw
ok.100y.com.tw

TITLE

Binding Post, Medium
(Red/Black)

CUSTOMER