



Low Power, Rail-to-Rail Output, Precision JFET Amplifiers

AD8641/AD8642/AD8643

FEATURES

Low supply current: 250 μ A max
Very low input bias current: 1 pA max
Low offset voltage: 750 μ V max
Single-supply operation: 5 V to 26 V
Dual-supply operation: ± 2.5 V to ± 13 V
Rail-to-rail output
Unity-gain stable
No phase reversal
SC70 package

APPLICATIONS

Line-/battery-powered instruments
Photodiode amplifiers
Precision current sensing
Medical instrumentation
Industrial controls
Precision filters
Portable audio
ATE

GENERAL DESCRIPTION

The AD8641/AD8642/AD8643 are low power, precision JFET input amplifiers featuring extremely low input bias current and rail-to-rail output. The ability to swing nearly rail-to-rail at the input and rail-to-rail at the output enables designers to buffer CMOS DACs, ASICs, and other wide output swing devices in single-supply systems. The outputs remain stable with capacitive loads of more than 500 pF.

The AD8641/AD8642/AD8643 are suitable for applications utilizing multichannel boards that require low power to manage heat. Other applications include photodiodes, ATE reference level drivers, battery management, and industrial controls.

The AD8641/AD8642/AD8643 are fully specified over the extended industrial temperature range of -40°C to $+125^{\circ}\text{C}$. The AD8641 is available in 5-lead SC70 and 8-lead SOIC lead-free packages. The AD8642 is available in 8-lead MSOP and 8-lead SOIC lead-free packages. The AD8643 is available in 14-lead SOIC and 16-lead, 3 mm $\times$ 3 mm, LFCSP lead-free packages.

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

PIN CONFIGURATIONS




Figure 1. 5-Lead SC70 (KS-5)




Figure 2. 8-Lead SOIC (R-8)

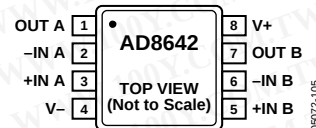


Figure 3. 8-Lead SOIC (R-8)



Figure 4. 8-Lead MSOP (RM-8)





Figure 5. 14-Lead SOIC (R-14)

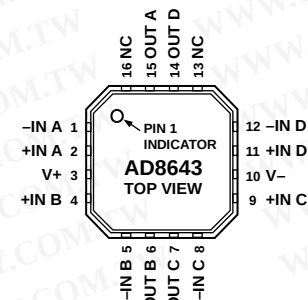

NOTES

1. NC = NO CONNECT.
2. EXPOSED PAD SHOULD BE CONNECTED TO V- OR TO GROUND.

Figure 6. 16-Lead LFCSP (CP-16) (Not Drawn to Scale)

Rev. C

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

TABLE OF CONTENTS

Features	1	Absolute Maximum Ratings	5
Applications	1	Thermal Resistance	5
General Description	1	ESD Caution	5
Pin Configurations	1	Typical Performance Characteristics	6
Revision History	2	Outline Dimensions	13
Specifications	3	Ordering Guide	15
Electrical Characteristics	3		

REVISION HISTORY

11/10—Rev. B to Rev. C

Changes to Figure 6	1
Added Thermal Resistance Section and Table 4	5
Updated Outline Dimensions	13
Changes to Ordering Guide	15

4/05—Rev. A to Rev. B

Added AD8643	Universal
Added 14-Lead SOIC	Universal
Added 16-Lead LFCSP	Universal
Updated Outline Dimensions	13
Changes to Ordering Guide	14

3/05—Rev. 0 to Rev. A

Added AD8642	Universal
Changes to General Description	1
Added Figure 3 and Figure 4	1
Changes to Specifications	3
Changes to Absolute Maximum Ratings	5
Changes to Figure 22	8
Changes to Figure 23	9
Changes to Figure 41	12
Updated Outline Dimensions	13
Changes to Ordering Guide	14

10/04—Initial Version: Revision 0

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS

$V_S = 5.0\text{ V}$, $V_{CM} = 2.5\text{ V}$, $T_A = 25^\circ\text{C}$, unless otherwise noted.

Table 1.

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
INPUT CHARACTERISTICS						
Offset Voltage	V _{OS}	AD8643 LFCSP only −40°C < T _A < +85°C +85°C < T _A < +125°C, V _{CM} = 1.5 V		50	750 1 1.5 1.6	μV mV mV mV
Input Bias Current	I _B	−40°C < T _A < +125°C		0.25	1 180	pA pA
Input Offset Current	I _{OS}	−40°C < T _A < +125°C			0.5 60	pA pA
Input Voltage Range			0		3	V
Common-Mode Rejection Ratio	CMRR	V _{CM} = 0 V to 2.5 V	74	93		dB
Large Signal Voltage Gain	A _{VO}	R _L = 10 kΩ, V _O = 0.5 to 4.5 V	80	140		V/mV
Offset Voltage Drift	ΔV _{OS} /ΔT	−40°C < T _A < +125°C		2.5		μV/°C
OUTPUT CHARACTERISTICS						
Output Voltage High	V _{OH}	I _L = 1 mA, −40°C to +125°C	4.95 4.94			V V
Output Voltage Low	V _{OL}	I _L = 1 mA, −40°C to +125°C			0.05 0.01 0.05	V V V
Output Current	I _{OUT}			±6		mA
POWER SUPPLY						
Power Supply Rejection Ratio	PSRR	V _S = 5 V to 26 V	90	107		dB
Supply Current/Amplifier	I _{SY}	−40°C < T _A < +125°C		195	250 270	μA μA
DYNAMIC PERFORMANCE						
Slew Rate	SR			2		V/μs
Gain Bandwidth Product	GBP	AD8641, AD8642 AD8643		3 2.5		MHz MHz
Phase Margin	∅ _m			50		Degrees
NOISE PERFORMANCE						
Voltage Noise	e _N p-p	f = 0.1 Hz to 10 Hz		4.0		μV p-p
Voltage Noise Density	e _N	f = 1 kHz		28.5		nV/√Hz
Current Noise Density	i _N	f = 1 kHz		0.5		fA/√Hz

AD8641/AD8642/AD8643

$V_S = \pm 13\text{ V}$, $V_{CM} = 0\text{ V}$, $T_A = 25^\circ\text{C}$, unless otherwise noted.

Table 2.

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
INPUT CHARACTERISTICS						
Offset Voltage	V_{OS}	AD8643 LFCSP only $-40^\circ < T_A < +125^\circ\text{C}$		70	750	μV
Input Bias Current	I_B	$-40^\circ\text{C} < T_A < +125^\circ\text{C}$		0.25	1	pA
Input Offset Current	I_{OS}	$-40^\circ\text{C} < T_A < +125^\circ\text{C}$			1.5	mV
Input Voltage Range		$-40^\circ\text{C} < T_A < +125^\circ\text{C}$			260	pA
Common-Mode Rejection Ratio	CMRR	$V_{CM} = -13\text{ V to } +10\text{ V}$	-13	107	65	pA
Large Signal Voltage Gain	A_{VO}	$R_L = 10\text{ k}\Omega$, $V_O = -11\text{ V to } +11\text{ V}$	90	215	+10	dB
Offset Voltage Drift	$\Delta V_{OS}/\Delta T$	$-40^\circ\text{C} < T_A < +125^\circ\text{C}$		2.5		$\mu\text{V}/^\circ\text{C}$
OUTPUT CHARACTERISTICS						
Output Voltage High	V_{OH}	$I_L = 1\text{ mA}$, $-40^\circ\text{C to } +125^\circ\text{C}$	+12.95			V
Output Voltage Low	V_{OL}	$I_L = 1\text{ mA}$, $-40^\circ\text{C to } +125^\circ\text{C}$	+12.94		-12.95	V
Output Current	I_{OUT}			± 12	-12.94	mA
POWER SUPPLY						
Power Supply Rejection Ratio	PSRR	$V_S = \pm 2.5\text{ V to } \pm 13\text{ V}$	90	107		dB
Supply Current/Amplifier	I_{SY}	$-40^\circ\text{C} < T_A < +125^\circ\text{C}$		200	290	μA
					330	μA
DYNAMIC PERFORMANCE						
Slew Rate	SR			3		$\text{V}/\mu\text{s}$
Gain Bandwidth Product	GBP			3.5		MHz
Phase Margin	ϕ_m			60		Degrees
NOISE PERFORMANCE						
Voltage Noise	e_n p-p	$f = 0.1\text{ Hz to } 10\text{ Hz}$		4.2		$\mu\text{V p-p}$
Voltage Noise Density	e_n	$f = 1\text{ kHz}$		27.5		$\text{nV}/\sqrt{\text{Hz}}$
Current Noise Density	i_n	$f = 1\text{ kHz}$		0.5		$\text{fA}/\sqrt{\text{Hz}}$

ABSOLUTE MAXIMUM RATINGS

Absolute maximum ratings apply at 25°C, unless otherwise noted.

Table 3.

Parameter	Rating
Supply Voltage	27.3 V
Input Voltage	VS– to VS+
Differential Input Voltage	±Supply Voltage
Output Short-Circuit Duration	Indefinite
Storage Temperature Range	
KS-5, R-8, RM-8, R-14, CP-16 Packages	–65°C to +150°C
Operating Temperature Range	–40°C to +125°C
Junction Temperature Range	
KS-5, R-8, RM-8, R-14, CP-16 Packages	–65°C to +150°C
Lead Temperature (Soldering, 60 sec)	300°C

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

THERMAL RESISTANCE

θ_{JA} is specified for the worst-case conditions, that is, a device soldered in a circuit board for surface-mount packages. This was measured using a standard 4-layer board. For the LFCSP package, the exposed pad should be soldered to a copper plane that may be connected to V– or to ground.

Table 4.

Package Type	θ_{JA}	θ_{JC}	Unit
5-Lead SC70 (KS)	430	149	°C/W
8-Lead SOIC (R)	121	43	°C/W
8-Lead MSOP (RM)	142	45	°C/W
14-Lead SOIC (R)	110	36	°C/W
16-Lead LFCSP (CP)	81	16	°C/W

ESD CAUTION



ESD (electrostatic discharge) sensitive device.

Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

TYPICAL PERFORMANCE CHARACTERISTICS

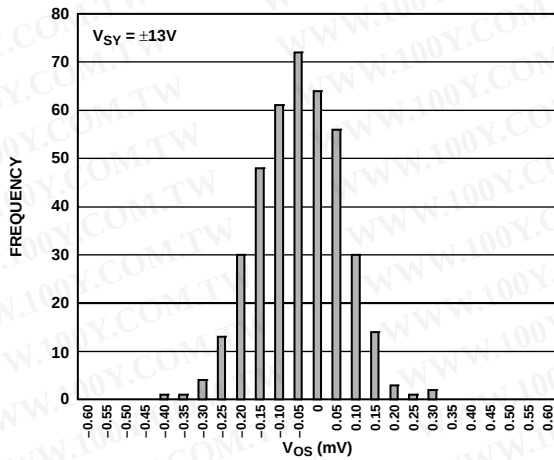


Figure 7. Input Offset Voltage

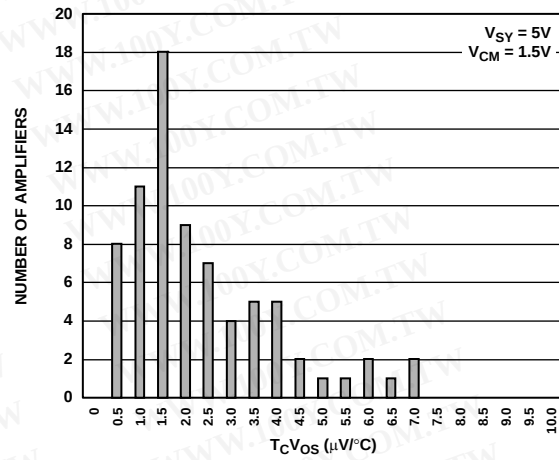


Figure 10. Offset Voltage Drift

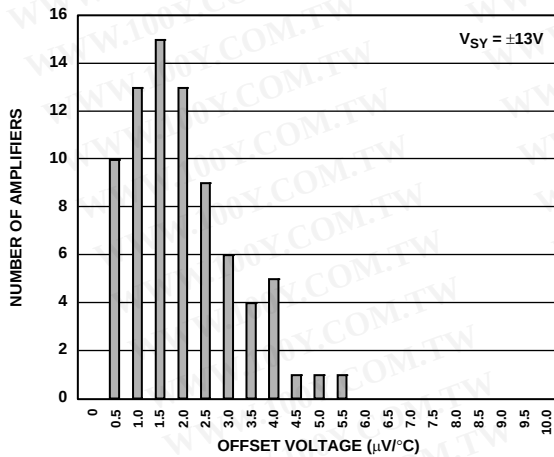


Figure 8. Offset Voltage Drift

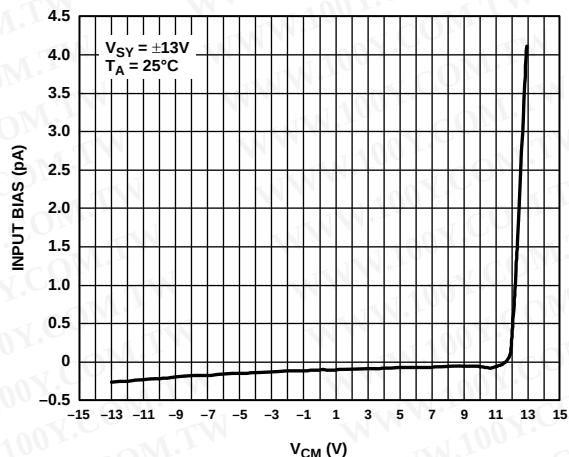


Figure 11. Input Bias Current vs. V_{CM}

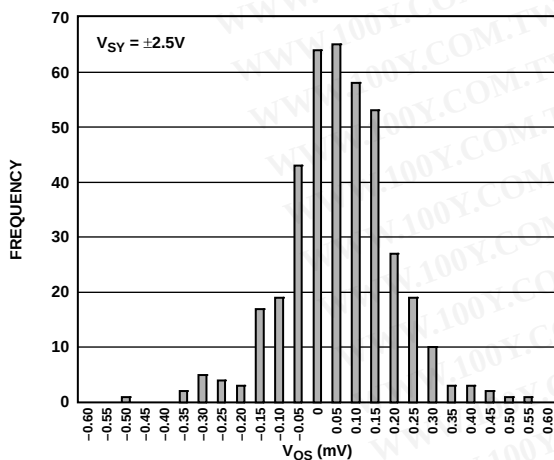


Figure 9. Input Offset Voltage

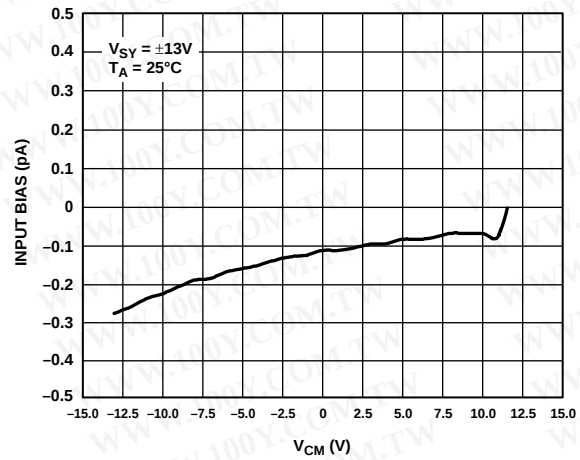


Figure 12. Input Bias Current vs. V_{CM}

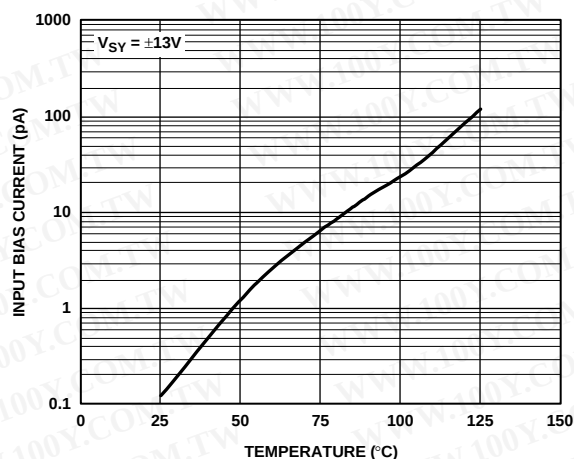


Figure 13. Input Bias Current vs. Temperature

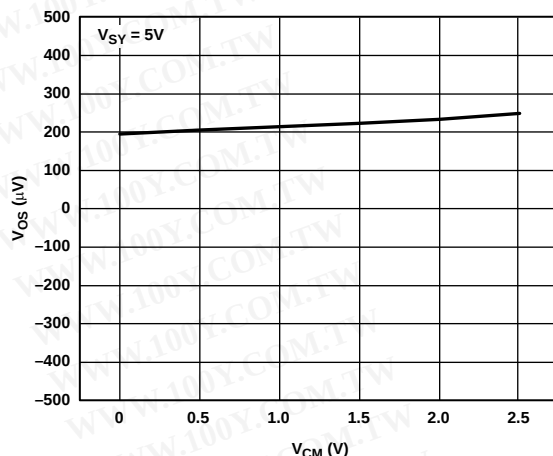


Figure 16. Input Offset Voltage vs. V_{CM}

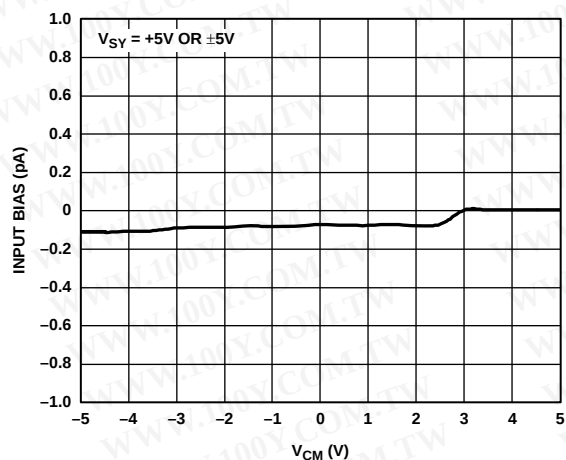


Figure 14. Input Bias Current vs. V_{CM}

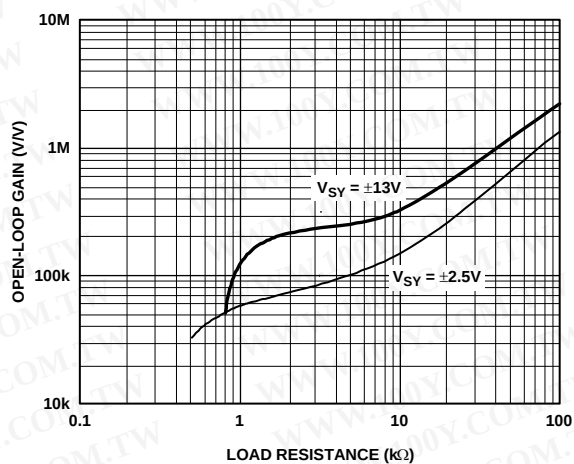


Figure 17. Open-Loop Gain vs. Load Resistance

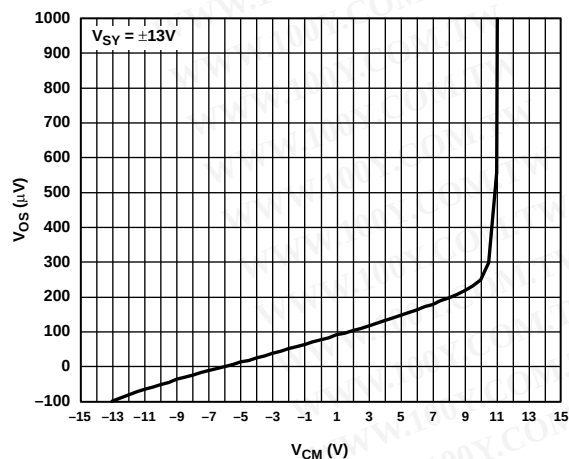


Figure 15. Input Offset Voltage vs. V_{CM}

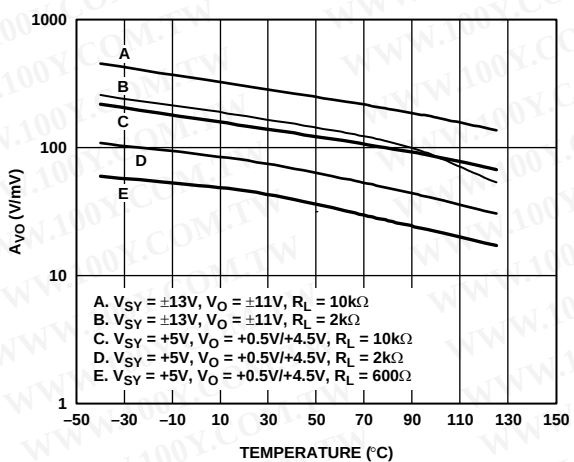


Figure 18. Open-Loop Gain vs. Temperature

AD8641/AD8642/AD8643

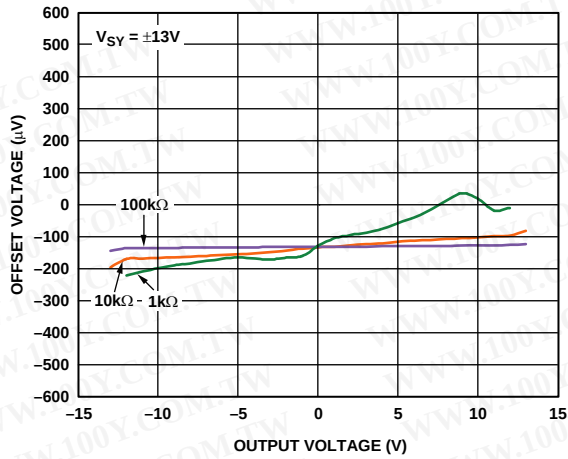


Figure 19. Input Error Voltage vs. Output Voltage for Resistive Loads

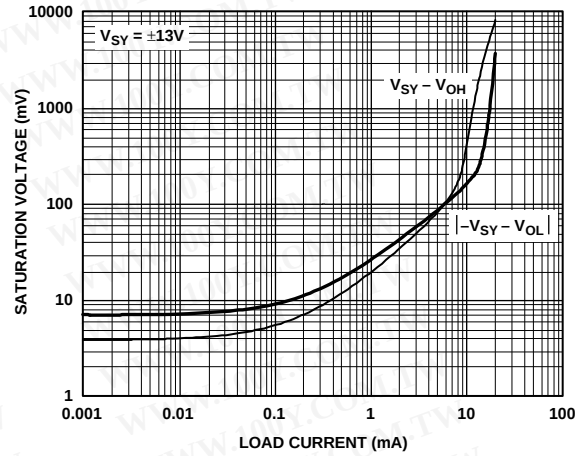


Figure 22. Output Saturation Voltage vs. Load Current

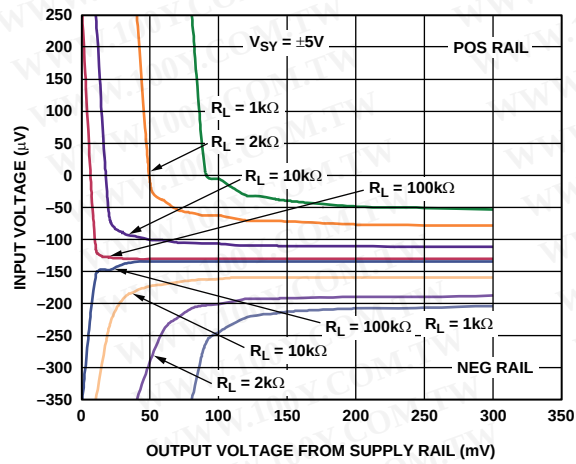


Figure 20. Input Error Voltage vs. Output Voltage Within 300 mV of Supply Rails

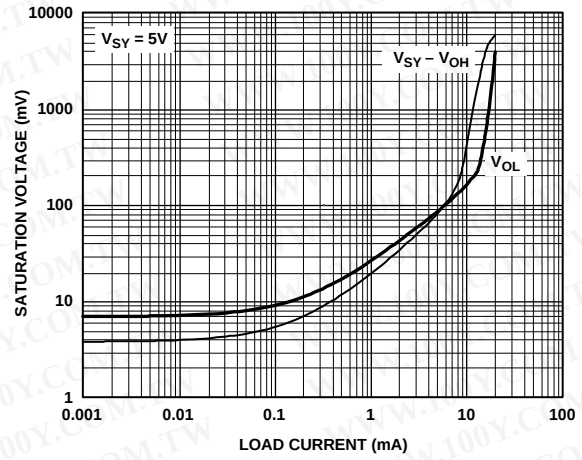


Figure 23. Output Saturation Voltage vs. Load Current

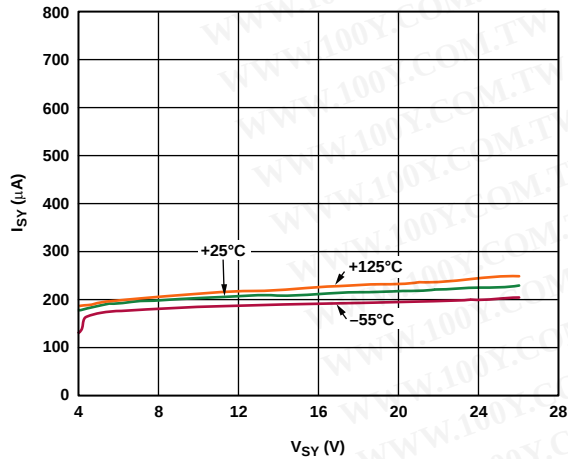


Figure 21. Quiescent Current vs. Supply Voltage at Different Temperatures

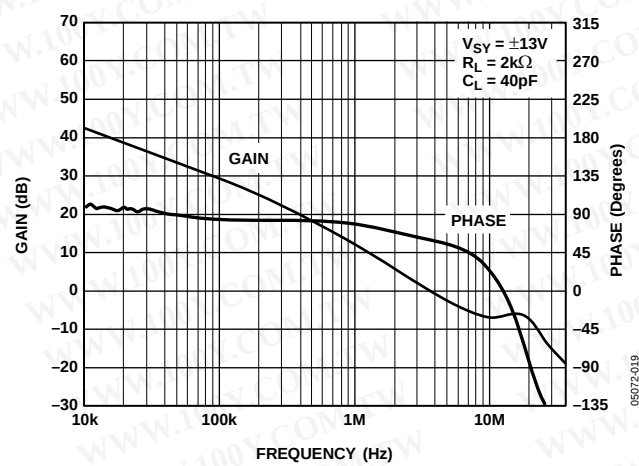


Figure 24. Open-Loop Gain and Phase Margin vs. Frequency

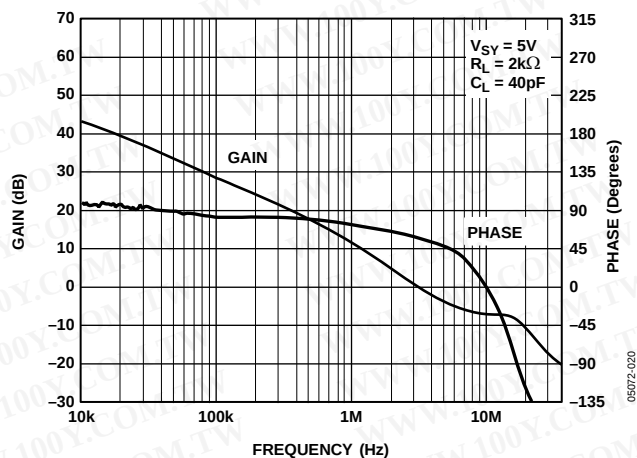


Figure 25. Open-Loop Gain and Phase Margin vs. Frequency

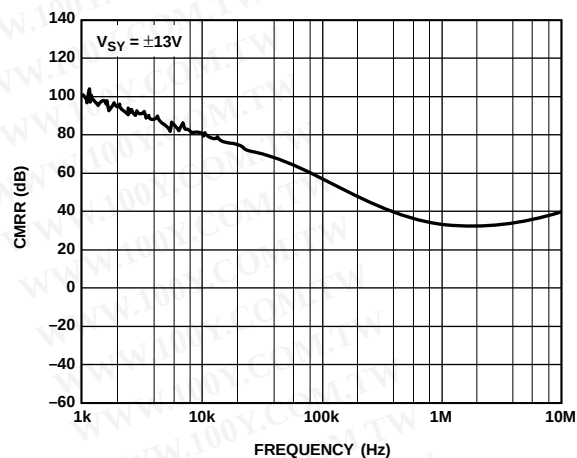


Figure 28. CMRR vs. Frequency

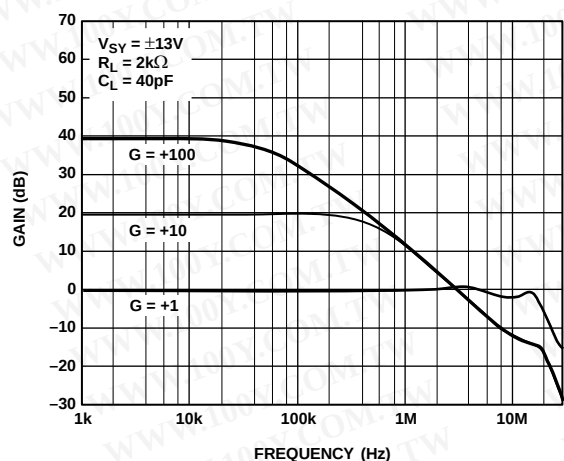


Figure 26. Closed-Loop Gain vs. Frequency

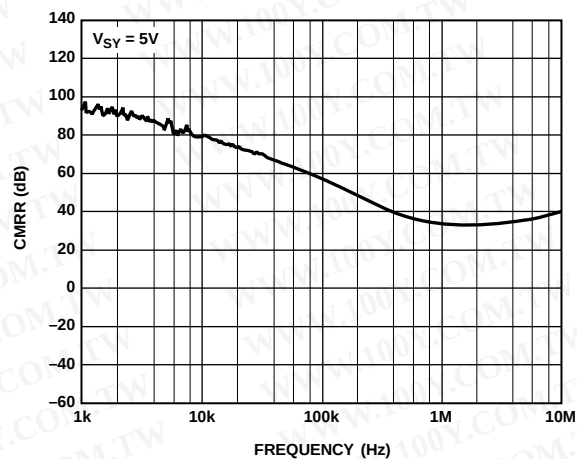


Figure 29. CMRR vs. Frequency

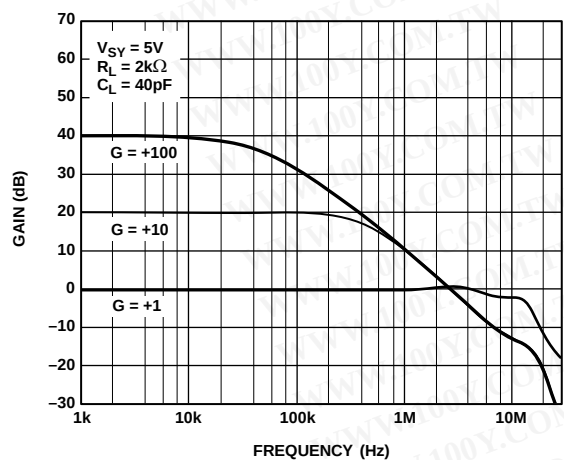


Figure 27. Closed-Loop Gain vs. Frequency

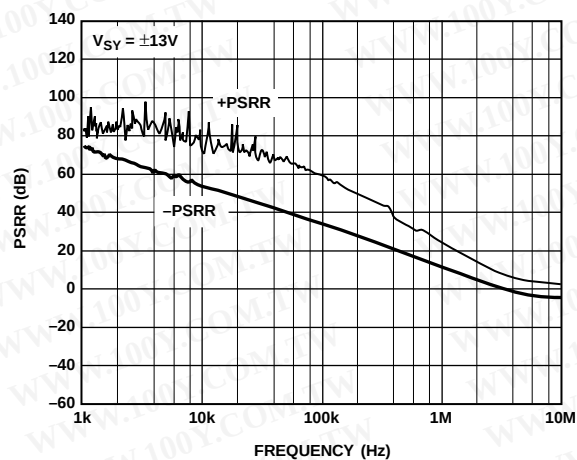


Figure 30. PSRR vs. Frequency

AD8641/AD8642/AD8643

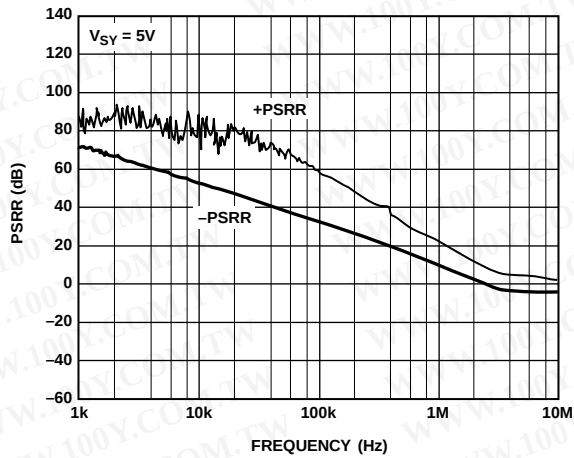


Figure 31. PSRR vs. Frequency

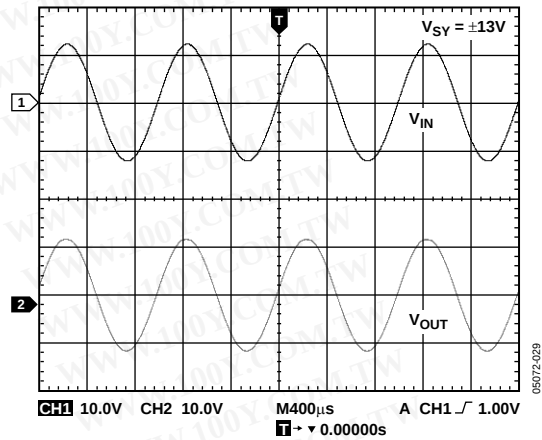


Figure 34. No Phase Reversal

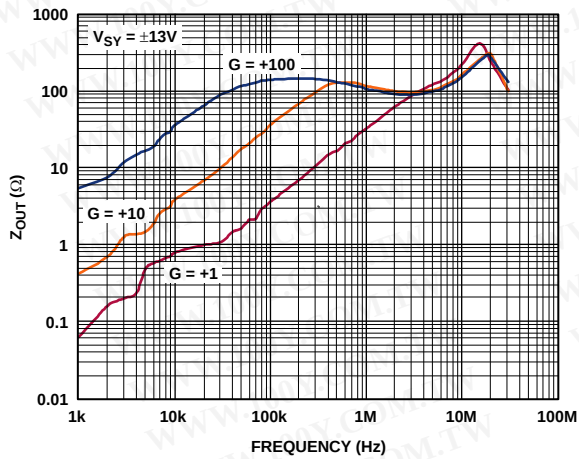


Figure 32. Output Impedance vs. Frequency

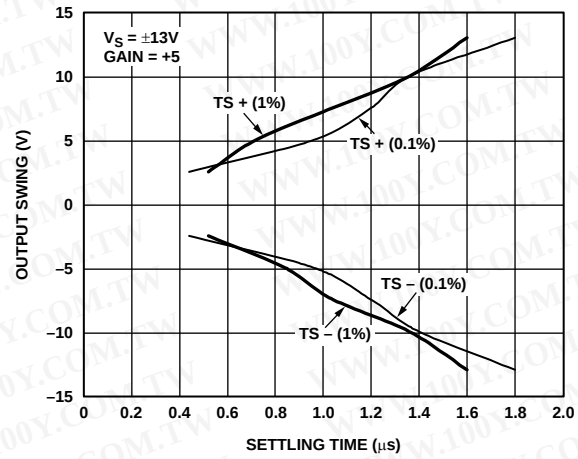


Figure 35. Output Swing and Error vs. Settling Time

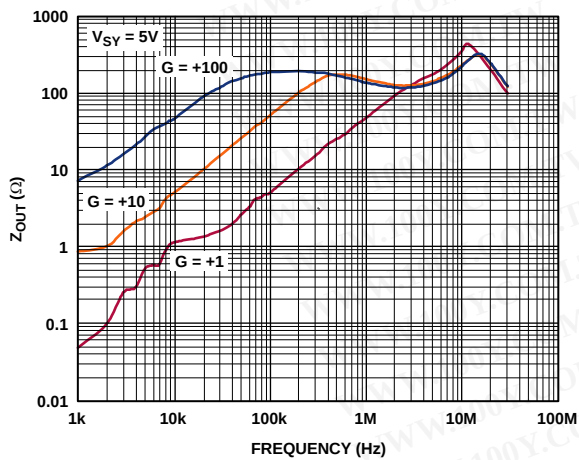


Figure 33. Output Impedance vs. Frequency

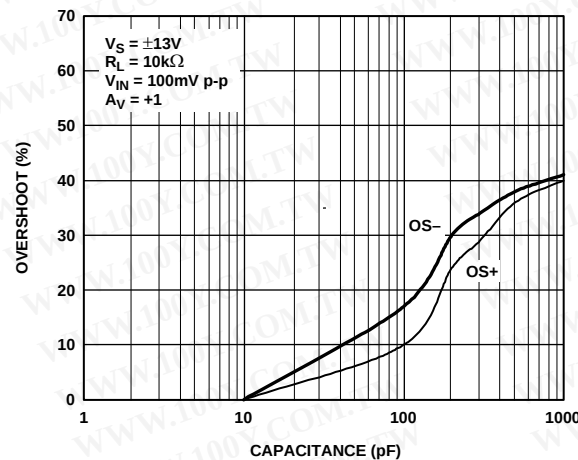


Figure 36. Small Signal Overshoot vs. Load Capacitance

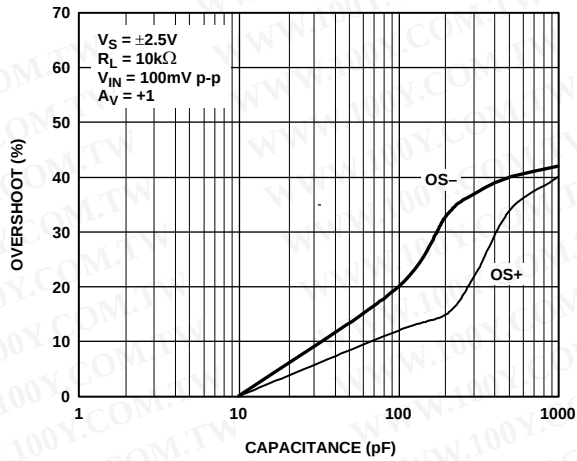


Figure 37. Small Signal Overshoot vs. Load Capacitance

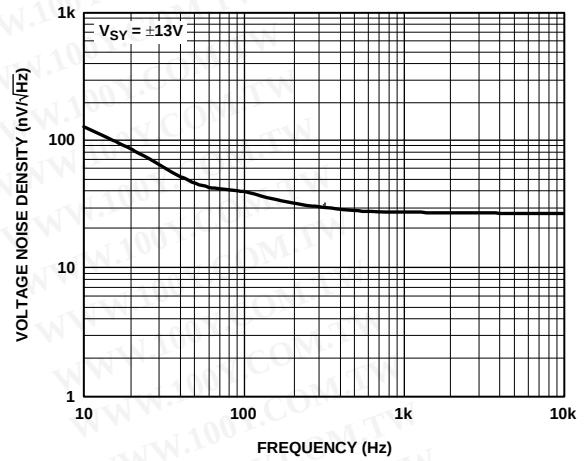


Figure 40. Voltage Noise Density

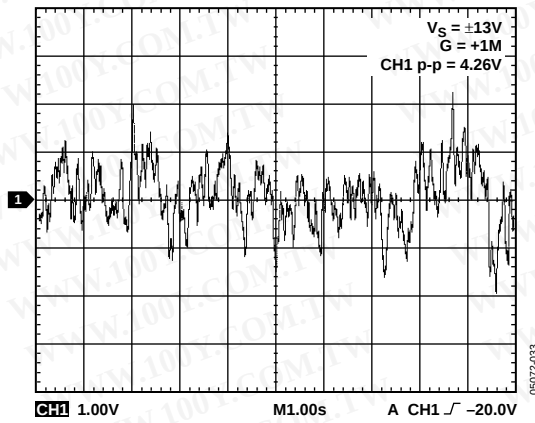


Figure 38. 0.1 Hz to 10 Hz Noise

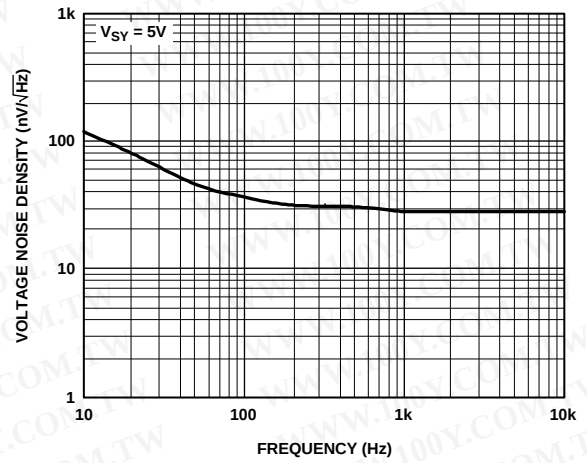


Figure 41. Voltage Noise Density

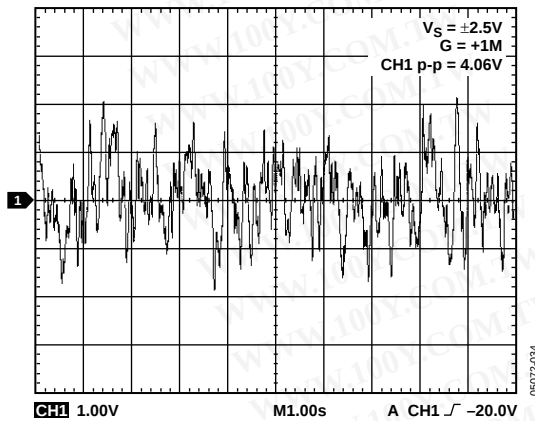


Figure 39. 0.1 Hz to 10 Hz Noise

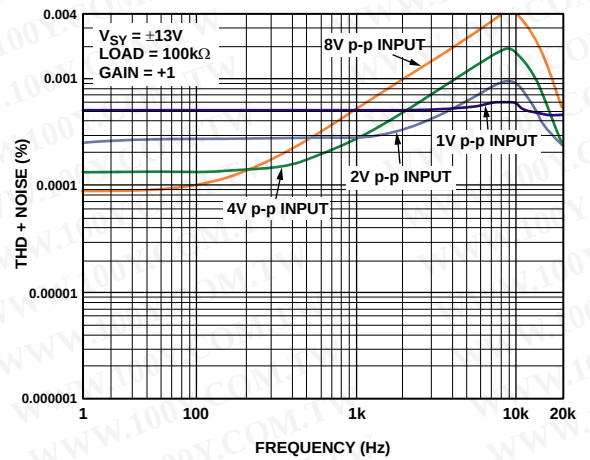


Figure 42. Total Harmonic Distortion + Noise vs. Frequency

AD8641/AD8642/AD8643

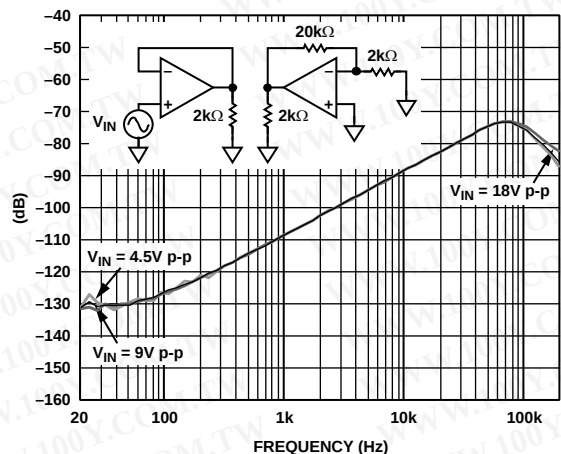


Figure 43. Channel Separation

OUTLINE DIMENSIONS


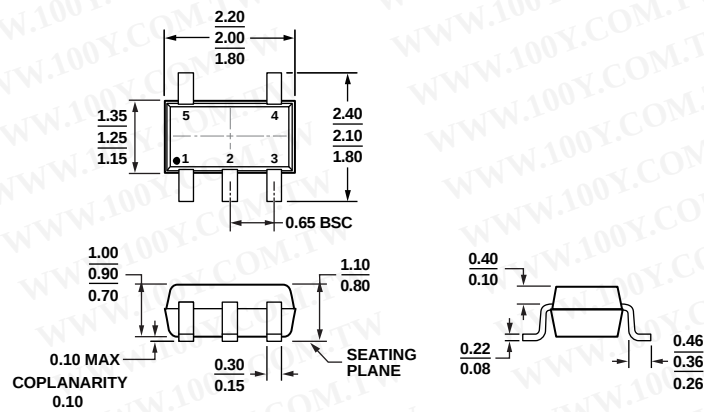


Figure 44. 5-Lead Thin Shrink Small Outline Transistor Package [SC70]
(KS-5)

Dimensions shown in millimeters

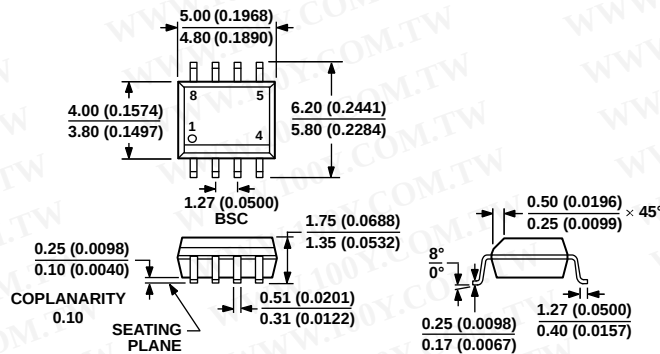


CONTROLLING DIMENSIONS ARE IN MILLIMETERS; INCH DIMENSIONS (IN PARENTHESES) ARE ROUNDED-OFF MILLIMETER EQUIVALENTS FOR REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN.

Figure 45. 8-Lead Standard Small Outline Package [SOIC_N]
(R-8)

Dimensions shown in millimeters and (inches)


AD8641/AD8642/AD8643

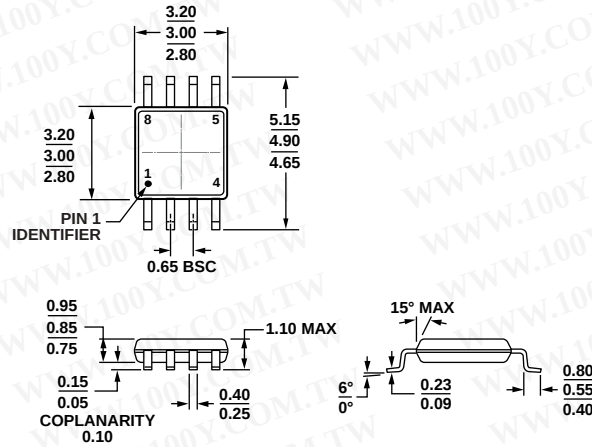

COMPLIANT TO JEDEC STANDARDS MO-187-AA

Figure 46. 8-Lead Mini Small Outline Package [MSOP]
(RM-8)

Dimensions shown in millimeters

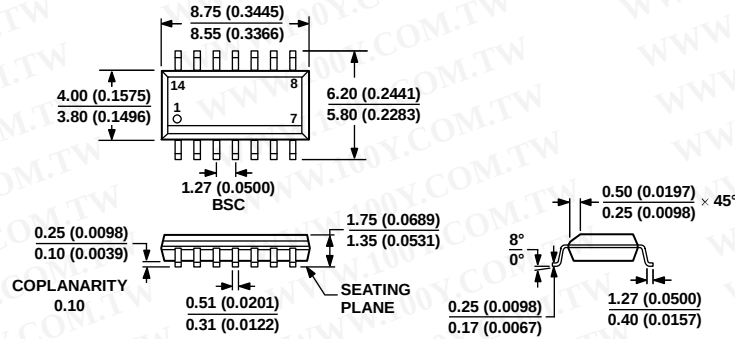


COMPLIANT TO JEDEC STANDARDS MS-012-AB

CONTROLLING DIMENSIONS ARE IN MILLIMETERS; INCH DIMENSIONS (IN PARENTHESES) ARE ROUNDED-OFF MILLIMETER EQUIVALENTS FOR REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN.

Figure 47. 14-Lead Standard Small Outline Package [SOIC_N]
(R-14)

Dimensions shown in millimeters and (inches)

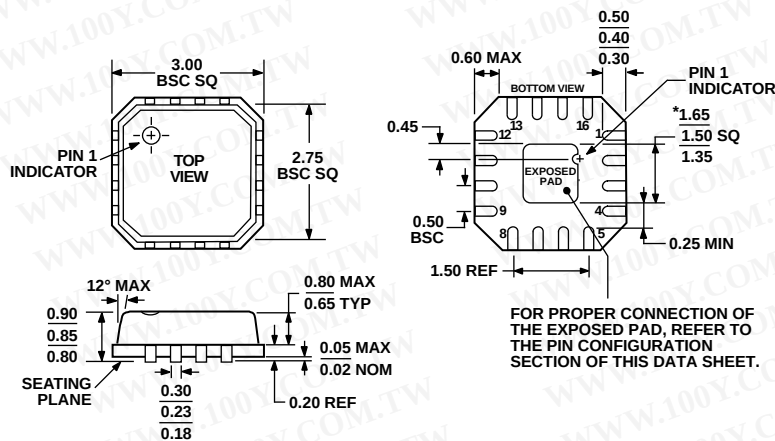

*COMPLIANT TO JEDEC STANDARDS MO-220-VEED-2 EXCEPT FOR EXPOSED PAD DIMENSION.

Figure 48. 16-Lead Lead Frame Chip Scale Package [LFCSP_VQ]
3 mm x 3 mm Body, Very Thin Quad (CP-16-3)

Dimensions shown in millimeters

ORDERING GUIDE

Model ¹	Temperature Range	Package Description	Package Option	Branding
AD8641AKSZ-R2	–40°C to +125°C	5-Lead SC70	KS-5	A07
AD8641AKSZ-REEL7	–40°C to +125°C	5-Lead SC70	KS-5	A07
AD8641AKSZ-REEL	–40°C to +125°C	5-Lead SC70	KS-5	A07
AD8641ARZ	–40°C to +125°C	8-lead SOIC_N	R-8	
AD8641ARZ-REEL7	–40°C to +125°C	8-lead SOIC_N	R-8	
AD8641ARZ-REEL	–40°C to +125°C	8-lead SOIC_N	R-8	
AD8642ARMZ	–40°C to +125°C	8-lead MSOP	RM-8	A0A
AD8642ARMZ-REEL	–40°C to +125°C	8-lead MSOP	RM-8	A0A
AD8642ARZ	–40°C to +125°C	8-lead SOIC_N	R-8	
AD8642ARZ-REEL7	–40°C to +125°C	8-lead SOIC_N	R-8	
AD8642ARZ-REEL	–40°C to +125°C	8-lead SOIC_N	R-8	
AD8643ARZ	–40°C to +125°C	14-lead SOIC_N	R-14	
AD8643ARZ-REEL7	–40°C to +125°C	14-lead SOIC_N	R-14	
AD8643ARZ-REEL	–40°C to +125°C	14-lead SOIC_N	R-14	
AD8643ACPZ-R2	–40°C to +125°C	16-Lead LFCSP_VQ	CP-16-3	AUA
AD8643ACPZ-REEL7	–40°C to +125°C	16-Lead LFCSP_VQ	CP-16-3	AUA
AD8643ACPZ-REEL	–40°C to +125°C	16-Lead LFCSP_VQ	CP-16-3	AUA

¹ Z = RoHS Compliant Model.

AD8641/AD8642/AD8643

NOTES

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

