

Single Supply Quad Operational Amplifier with Full Swing Output

■ GENERAL DESCRIPTION


The NJM2747 is a quad low supply voltage operational amplifier with Full swing output.

It is suitable for audio section of portable sets, PCs and any General-purpose use.


■ FEATURES

- Operating Voltage : 2.5V to 14V
- Output Full Swing : $V_{OH} \geq 4.9V$ Typ. (at $V^+ = 5V$, $R_L = 5k\Omega$)
: $V_{OL} \leq 0.1V$ Typ. (at $V^+ = 5V$, $R_L = 5k\Omega$)
- Offset Voltage : 1mV Typ
- Slew Rate : $3.5V/\mu s$ Typ.
- Low Distortion : 0.001% typ. (at $V^+ = 5V$, $f = 1kHz$)
- Low Input Voltage Noise : $10nV/\sqrt{Hz}$ typ.
- Bipolar Technology
- Package Outline : DIP14, DMP14, SSOP14

■ PACKAGE OUTLINE



NJM2747D




NJM2747M



NJM2747V

■ PIN CONFIGURATION

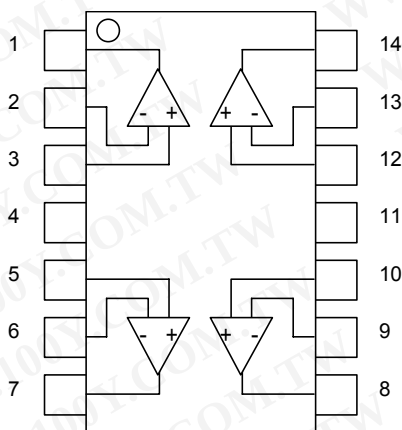

PIN FUNCTION

1. A	OUTPUT	8. C	OUTPUT
2. A	-INPUT	9. C	-INPUT
3. A	+INPUT	10. A	+INPUT
4. V^+		11. GND	
5. B	+INPUT	12. D	+INPUT
6. B	-INPUT	13. D	-INPUT
7. B	OUTPUT	14. D	OUTPUT

NJM2747D

NJM2747M

NJM2747V

(Top View)

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

■ ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V^+	15	V
Differential Input Voltage Range	V_{ID}	± 15 (Note1)	V
Common Mode Input Voltage Range	V_{ICM}	0 to 15 (Note1)	V
Power Dissipation	P_D	DIP14 (870) DMP14 (450) (Note2) DMP14 (560) (Note3) SSOP14 (420) (Note2) SSOP14 (520) (Note3)	mW
Operating Temperature Range	T_{opr}	-40 to +85	$^{\circ}\text{C}$
Storage Temperature Range	T_{stg}	-50 to +125	$^{\circ}\text{C}$

(Note1) For supply voltage less than 15V, the absolute maximum input voltage is equal to the supply voltage.

(Note2) On the PCB "EIA/JEDEC (76.2×114.3×1.6mm, two layers, FR-4) "

(Note3) On the PCB "EIA/JEDEC (76.2×114.3×1.6mm, four layers, FR-4) "

■ OPERATING VOLTAGE ($T_a=25^{\circ}\text{C}$)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V^+	2.5 to 14	V

■ ELECTRICAL CHARACTERISTICS

●DC CHARACTERISTICS ($V^+=5\text{V}, T_a=25^{\circ}\text{C}$)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Current	I_{CC}	$R_L=\infty, V_{IN}=2.5\text{V}$, No Signal Apply	-	8	11	mA
Input Offset Voltage	V_{IO}	$R_S \leq 10\text{k}\Omega$	-	1	6	mV
Input Bias Current	I_B		-	100	350	nA
Input Offset Current	I_{IO}		-	5	100	nA
Large Signal Voltage Gain	A_v	$R_L \geq 10\text{k}\Omega$ to 2.5V, $V_o=0.5\text{V}$ to 4.5V	65	85	-	dB
Common Mode Rejection Ratio	CMR	$0\text{V} \leq V_{CM} \leq 4\text{V}$	60	75	-	dB
Supply Voltage Rejection Ratio	SVR	$V^+=2.5\text{V}$ to 14V	60	80	-	dB
Output Voltage	V_{OH}	$R_L=5\text{k}\Omega$ to 2.5V	4.75	4.9	-	V
	V_{OL}	$R_L=5\text{k}\Omega$ to 2.5V	-	0.1	0.25	V
Input Common Mode Voltage Range	V_{ICM}	CMR $\geq 60\text{dB}$	0	-	4	V

●AC CHARACTERISTICS ($V^+=5\text{V}, T_a=25^{\circ}\text{C}$)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Unity Gain Bandwidth	GB	$f=10\text{kHz}$	-	10	-	MHz
Phase Margin	Φ_M	$R_L=10\text{k}\Omega, C_L=10\text{pF}$	-	75	-	Deg
Equivalent Input Noise Voltage	V_{NI}	$f=1\text{kHz}, V_{CM}=2.5\text{V}$	-	10	-	nV/ $\sqrt{\text{Hz}}$
Total Harmonic Distortion	THD	$f=1\text{kHz}, A_v=+2$ $R_L=10\text{k}\Omega$ to 2.5V, $V_o=1.5\text{Vrms}$	-	0.001	-	%
Amp to Amp Separation	CS	$f=1\text{kHz}$ $R_L=10\text{k}\Omega$ to 2.5V, $V_o=1.5\text{Vrms}$	-	120	-	dB

●AC CHARACTERISTICS ($V^+=5\text{V}, T_a=25^{\circ}\text{C}$)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Slew Rate	SR	(Note 4), $A_v=1, V_{IN}=2\text{Vpp}$ $R_L=10\text{k}\Omega$ to 2.5V $C_L=10\text{pF}$ to 2.5V	-	3.5	-	V/ μs

(Note 4) Number specified is the slower of the positive and negative slew rates.