


產品外觀圖

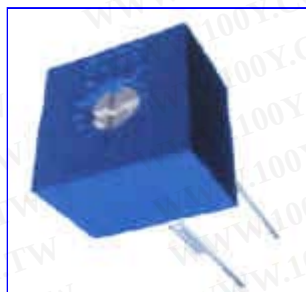

電器特性

標稱阻值範圍	50Ω-2MΩ
阻值允許偏差	±10%
終端電阻	≤1%R或10Ω
接觸電阻變化	CRV ≤ 3%R或5Ω
絕緣電阻	R ₁ ≥ 1GΩ (500Vac)
耐電壓	700Vac
極限動觸點電流	100mA
有效電行程	>總機械行程的70%



環境特性

額定功率	(315V max)0.75W 70°C OW 125°C
溫度範圍	-55°C - +125°C
溫度系數	TCR ± 250ppm/°C
溫度變化	-55°C, 30min, +125°C, 30min
循環5次	△R ≤ 5%R, △(Uab/Uac) ≤ 5%
振動	10 - 500Hz, 0.75mm, 6h
電氣間斷 ≤ 100μs	△R ≤ 5%R, △(Uab/Uac) ≤ 7.5%
碰撞	390m/s ² △ 4000次 △R ≤ 5%R
氣候順序	IEC68-2-2等 △R ≤ 10%R, R ₁ ≥ 100MΩ
70°C 電氣耐久性	0.75W, 1000h CRV ≤ 5%R
機械耐久性	200周 △R ≤ 10%R, CRV ≤ 3%R或5Ω
穩態濕熱	IEC68-2-3, Ca, 96h △R ≤ 10%R, R ₁ ≥ 100MΩ


物理特性

總機械行程	250 ± 10圈
起動力矩	≤ 35mN.m
標志	
阻值允許偏差	(10%不標注)
阻值代碼	
產品型號	
標準包裝	50只/管


外觀尺寸

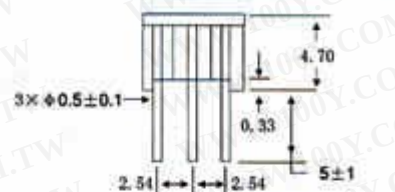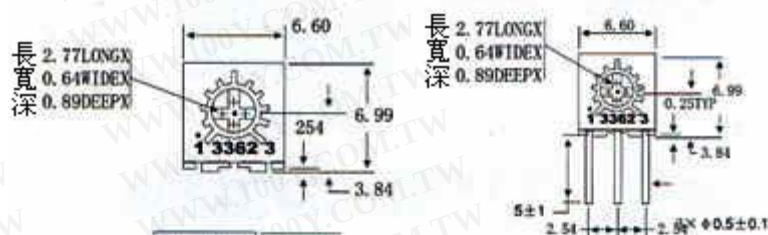


3362M

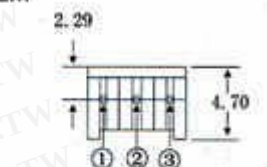


3362h

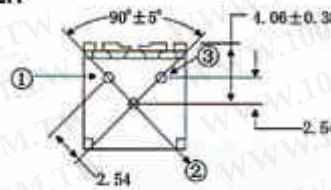


3362S

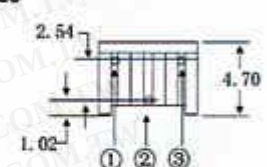


3362P




3362V



3362R



3362X



訂購指南 How To Order

3362-P-504

型号 Model
式样 Style
阻值代码 Resistance Code



圖中公差:除注明外均為±0.25
tolerance is ±0.25, if no identification

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)