


# 3M™ Round Conductor Flat Cable

.050" 28 AWG Stranded, PVC

3365 Series

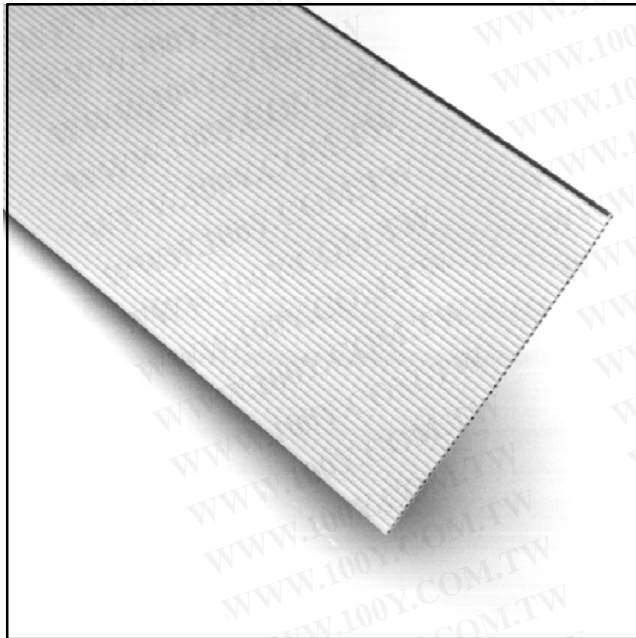

- 28 AWG wire on .050 inch centers permits mass termination to a broad line of IDC connectors
- Stranded wire provides flexibility and extended product life
- Zippable for branching or discrete termination
- Available in Gray or Black
- \*RoHS compliant

勝特力材料 886-3-5753170  
胜特力电子(上海) 86-21-54151736  
胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

Date Modified: May 24, 2004

TS-0080-14  
Sheet 1 of 2

## Physical

### Insulation

Material: Polyvinyl Chloride (PVC)

Color: Gray Standard or Black (See ordering information.)

### Marking

Standard: None

**Canadian Option:**  AWM 2651 105C 300V VW1 3M NU  AWM IA 105C 300V FT1  
EU <50V

**Conductors:** 28 AWG 7 × 36 [ 7 × 0.127 ] Tinned Stranded Copper

## Electrical

<b>Voltage Rating:</b>	USA: 300V	Canada: 300V	EU: <50V
<b>Insulation Resistance:</b>	> 1 × 10 <sup>10</sup> Ω/10 ft. [ 3m ]		
<b>Characteristic Impedance:</b>	<u>Unbalanced</u> 102 Ω	<u>Balanced</u> 172 Ω	
<b>Capacitance:</b>	14.47 pF/ft.	8.14 p F/ft.	
<b>Inductance:</b>	0.15 μH/ft.	0.24 μH/ft	
<b>Propagation Delay:</b>	1.47 ns/ft.	1.40 ns/ft.	
<b>Velocity of Propagation:</b>	69%	73%	

Note: Unbalanced is measured between ground-signal-ground conductors.

## Environmental

**Temperature Rating:** -20°C to +105°C

**Flammability Rating:** USA: VW-1

Canada: FT1

\*RoHS = Directive 2002/95/EC,  
Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment

UL File No.: E42769, Style No.: 2651

**3M**  
**Interconnect Solutions**  
<http://www.3M.com/interconnects/>

3M is a trademark of 3M Company.  
For technical, sales or ordering information call  
**800-225-5373**


# 3M™ Round Conductor Flat Cable

## .050" 28 AWG Stranded, PVC

3365 Series

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

Number of Conductors	3M Part Number	Dimension A	Dimension B
06	3365/06	0.300 ± .010 [ 7.62 ]	0.250 ± .007 [ 6.35 ]
08	3365/08	0.400 ± .010 [ 10.16 ]	0.350 ± .007 [ 8.89 ]
09	3365/09	0.450 ± .010 [ 11.43 ]	0.400 ± .007 [ 10.16 ]
10	3365/10	0.500 ± .010 [ 12.70 ]	0.450 ± .007 [ 11.43 ]
12	3365/12	0.600 ± .010 [ 15.24 ]	0.550 ± .007 [ 12.7 ]
14	3365/14	0.700 ± .010 [ 17.78 ]	0.650 ± .007 [ 16.51 ]
15	3365/15	0.750 ± .010 [ 19.05 ]	0.700 ± .007 [ 17.78 ]
16	3365/16	0.800 ± .015 [ 20.32 ]	0.750 ± .011 [ 19.05 ]
20	3365/20	1.000 ± .015 [ 25.40 ]	0.950 ± .011 [ 24.13 ]
24	3365/24	1.200 ± .015 [ 30.48 ]	1.150 ± .011 [ 29.21 ]
25	3365/25	1.250 ± .015 [ 31.75 ]	1.200 ± .011 [ 30.48 ]
26	3365/26	1.300 ± .015 [ 33.02 ]	1.250 ± .011 [ 31.75 ]
30	3365/30	1.500 ± .020 [ 38.10 ]	1.450 ± .015 [ 36.83 ]
34	3365/34	1.700 ± .020 [ 43.18 ]	1.650 ± .015 [ 41.91 ]
36	3365/36	1.800 ± .020 [ 45.72 ]	1.750 ± .015 [ 44.45 ]
37	3365/37	1.850 ± .020 [ 46.99 ]	1.800 ± .015 [ 45.72 ]
40	3365/40	2.000 ± .020 [ 50.80 ]	1.950 ± .015 [ 49.53 ]
44	3365/44	2.200 ± .020 [ 55.88 ]	2.150 ± .015 [ 54.61 ]
50	3365/50	2.500 ± .020 [ 63.50 ]	2.450 ± .015 [ 62.23 ]
60	3365/60	3.000 ± .020 [ 76.20 ]	2.950 ± .015 [ 74.93 ]
64	3365/64	3.200 ± .020 [ 81.28 ]	3.150 ± .015 [ 80.01 ]

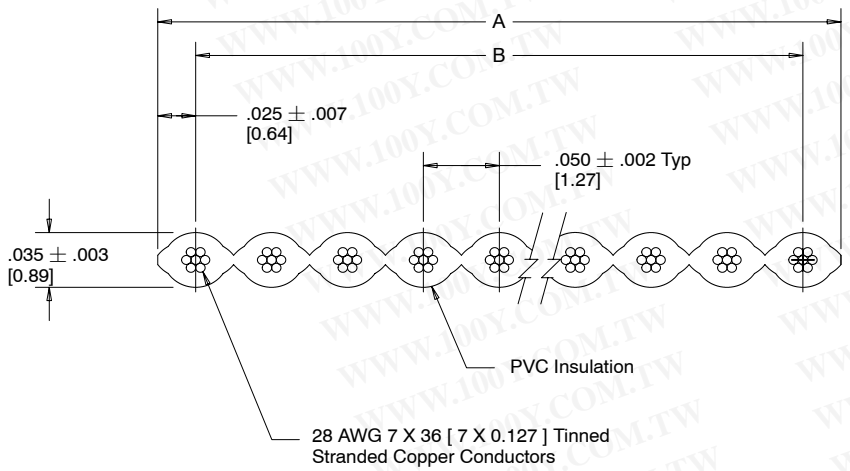


Inch [mm]			
Tolerance Unless Noted			
	.0	.00	.000
Inch	± .1	± .01	± .005

[ ] Dimensions for Reference Only

Note: Red marking on one edge of cable designates wire #1.

### Ordering Information

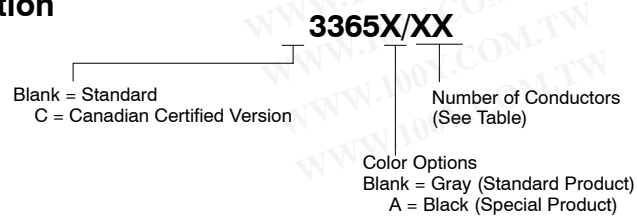

Note:  
1. Available in standard lengths of 100 feet, 300 feet, 30 meters or 100 meters per roll, please specify when ordering.

TS-0080-14  
Sheet 2 of 2