

HD6809, HD68A09, HD68B09


MPU (Micro Processing Unit)

The HD6809 is a revolutionary high performance 8-bit microprocessor which supports modern programming techniques such as position independence, reentrancy, and modular programming.


This third-generation addition to the HMCS6800 family has major architectural improvements which include additional registers, instructions and addressing modes.

The basic instructions of any computer are greatly enhanced by the presence of powerful addressing modes. The HD6809 has the most complete set of addressing modes available on any 8-bit microprocessor today.

The HD6809 has hardware and software features which make it an ideal processor for higher level language execution or standard controller applications.

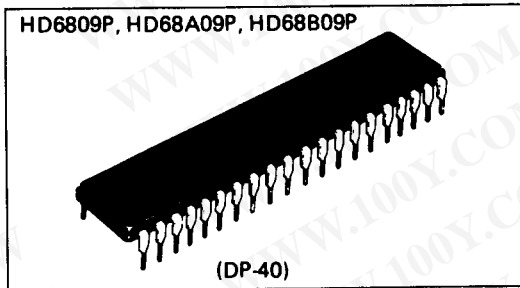

■ PIN ARRANGEMENT

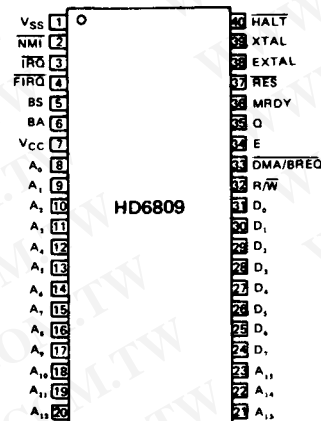

(Top View)

HD6800 COMPATIBLE

- Hardware — Interfaces with All HMCS6800 Peripherals
- Software — Upward Source Code Compatible Instruction Set and Addressing Modes

■ ARCHITECTURAL FEATURES

- Two 16-bit Index Registers
- Two 16-bit Indexable Stack Pointers
- Two 8-bit Accumulators can be Concatenated to Form One 16-Bit Accumulator
- Direct Page Register Allows Direct Addressing Throughout Memory

■ HARDWARE FEATURES

- On Chip Oscillator
- DMA/BREQ Allows DMA Operation or Memory Refresh
- Fast Interrupt Request Input Stacks Only Condition Code Register and Program Counter
- MRDY Input Extends Data Access Times for Use With Slow Memory
- Interrupt Acknowledge Output Allows Vectoring By Devices
- SYNC Acknowledge Output Allows for Synchronization to External Event
- Single Bus-Cycle RESET
- Single 5-Volt Supply Operation
- NMI Blocked After RESET Until After First Load of Stack Pointer
- Early Address Valid Allows Use With Slower Memories
- Early Write-Data for Dynamic Memories
- Compatible with MC6809, MC68A09 and MC68B09

■ SOFTWARE FEATURES

- 10 Addressing Modes
 - HMCS6800 Upward Compatible Addressing Modes
 - Direct Addressing Anywhere in Memory Map
 - Long Relative Branches
 - Program Counter Relative
 - True Indirect Addressing
 - Expanded Indexed Addressing:

2


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



- 0, 5, 8, or 16-bit Constant Offsets
- 8, or 16-bit Accumulator Offsets
- Auto-Increment/Decrement by 1 or 2

- Improved Stack Manipulation
- 1464 Instructions with Unique Addressing Modes
- 8 x 8 Unsigned Multiply
- 16-bit Arithmetic
- Transfer/Exchange All Registers
- Push/Pull Any Registers or Any Set of Registers
- Load Effective Address

■ BLOCK DIAGRAM

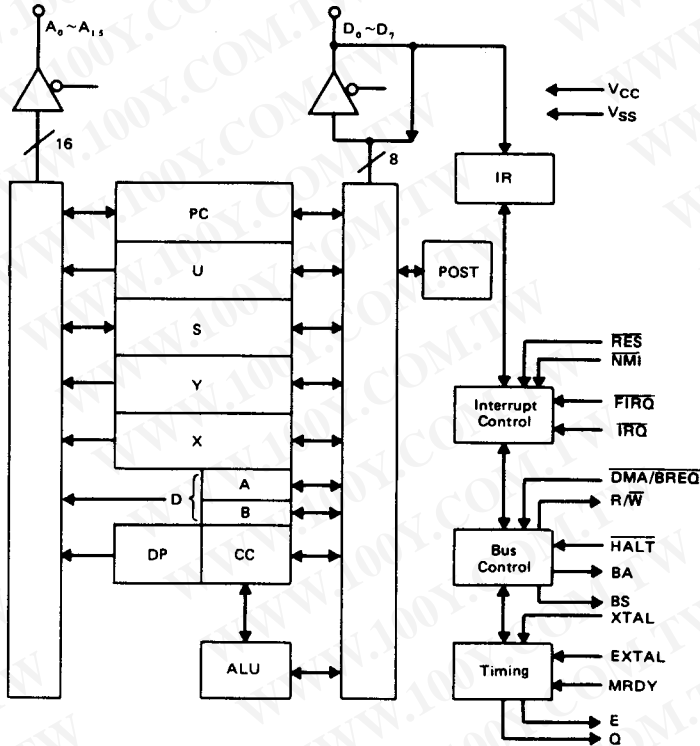

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

■ ABSOLUTE MAXIMUM RATINGS

Item	Symbol	Value	Unit
Supply Voltage	V_{CC}^*	-0.3 ~ +7.0	V
Input Voltage	V_{in}^*	-0.3 ~ +7.0	V
Operating Temperature	T_{opr}	-20 ~ +75	°C
Storage Temperature	T_{stg}	-55 ~ +150	°C

* With respect to V_{SS} (SYSTEM GND)

(NOTE) Permanent LSI damage may occur if maximum ratings are exceeded. Normal operation should be under recommended operating conditions. If these conditions are exceeded, it could affect reliability of LSI.

■ RECOMMENDED OPERATING CONDITIONS

Item	Symbol	min	typ	max	Unit	
Supply Voltage	V_{CC}^*	4.75	5.0	5.25	V	
Input Voltage	V_{IL}^*	-0.3	-	0.8	V	
	V_{IH}^*	Logic ($T_a = 0 \sim +75^\circ\text{C}$)	2.0	-	V_{CC}	V
		Logic ($T_a = -20 \sim 0^\circ\text{C}$)	2.2	-	V_{CC}	
	RES	4.0	-	V_{CC}		
Operating Temperature	T_{opr}	-20	25	75	°C	

* With respect to V_{SS} (SYSTEM GND)

■ ELECTRICAL CHARACTERISTICS

● DC CHARACTERISTICS ($V_{CC} = 5V \pm 5\%$, $V_{SS} = 0V$, $T_a = -20 \sim +75^\circ\text{C}$, unless otherwise noted.)

Item	Symbol	Test Condition	HD6809			HD68A09			HD68B09			Unit	
			min	typ*	max	min	typ*	max	min	typ*	max		
Input "High" Voltage	Except RES	$T_a = 0 \sim +75^\circ\text{C}$	2.0	-	V_{CC}	2.0	-	V_{CC}	2.0	-	V_{CC}	V	
		$T_a = -20 \sim 0^\circ\text{C}$	2.2	-	V_{CC}	2.2	-	V_{CC}	2.2	-	V_{CC}		
	RES		4.0	-	V_{CC}	4.0	-	V_{CC}	4.0	-	V_{CC}		
Input "Low" Voltage	V_{IL}		-0.3	-	0.8	-0.3	-	0.8	-0.3	-	0.8	V	
Input Leakage Current	Except EXTERNAL XTAL	$V_{in} = 0 \sim 5.25V$, $V_{CC} = \text{max}$	-2.5	-	2.5	-2.5	-	2.5	-2.5	-	2.5	μA	
Three State (Off State) Input Current	$D_0 \sim D_7$	$V_{in} = 0.4 \sim 2.4V$, $V_{CC} = \text{max}$	-10	-	10	-10	-	10	-10	-	10	μA	
	$A_0 \sim A_{15}$, R/W		-100	-	100	-100	-	100	-100	-	100		
Output "High" Voltage	V_{OH}	$D_0 \sim D_7$	$I_{LOAD} = -205\mu\text{A}$, $V_{CC} = \text{min}$	2.4	-	-	2.4	-	-	2.4	-	-	V
		$A_0 \sim A_{15}$, R/W, Q, E	$I_{LOAD} = -145\mu\text{A}$, $V_{CC} = \text{min}$	2.4	-	-	2.4	-	-	2.4	-	-	
		BA, BS	$I_{LOAD} = -100\mu\text{A}$, $V_{CC} = \text{min}$	2.4	-	-	2.4	-	-	2.4	-	-	
Output "Low" Voltage	V_{OL}	$I_{LOAD} = 2\text{mA}$	-	-	0.5	-	-	0.5	-	-	0.5	V	
Power Dissipation	P_D		-	-	1.0	-	-	1.0	-	-	1.0	W	
Input Capacitance	$D_0 \sim D_7$	$V_{in} = 0V$, $T_a = 25^\circ\text{C}$, $f = 1\text{MHz}$	-	10	15	-	10	15	-	10	15	pF	
	Except $D_0 \sim D_7$		-	7	10	-	7	10	-	7	10		
Output Capacitance	$A_0 \sim A_{15}$, R/W, BA, BS		-	-	12	-	-	12	-	-	12	pF	

* $T_a = 25^\circ\text{C}$, $V_{CC} = 5V$

2

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



● AC CHARACTERISTICS (V_{CC} = 5V±5%, V_{SS} = 0V, T_a = -20~+75°C, unless otherwise noted.)

1. CLOCK TIMING

Item	Symbol	Test Condition	HD6809			HD68A09			HD68B09			Unit
			min	typ	max	min	typ	max	min	typ	max	
Frequency of Operation (Crystal or External Input)	f _{X TAL}	Fig. 2, Fig. 3	0.4	-	4	0.4	-	6	0.4	-	8	MHz
Cycle Time	t _{cyc}		1000	-	10000	667	-	10000	500	-	10000	ns
Total Up Time	t _{UT}		975	-	-	640	-	-	480	-	-	ns
Processor Clock "High"	t _{PWEH}		450	-	15500	280	-	15700	220	-	15700	ns
Processor Clock "Low"	t _{PWEL}		430	-	5000	280	-	5000	210	-	5000	ns
E Rise and Fall Time	t _{Er} , t _{Ef}		-	-	25	-	-	25	-	-	20	ns
E _{Low} to Q _{High} Time	t _{AVS}		200	-	250	130	-	165	80	-	125	ns
Q Clock "High"	t _{PWQH}		450	-	5000	280	-	5000	220	-	5000	ns
Q Clock "Low"	t _{PWQL}		450	-	15500	280	-	15700	220	-	15700	ns
Q Rise and Fall Time	t _{QR} , t _{Qf}		-	-	25	-	-	25	-	-	20	ns
Q _{Low} to E Falling	t _{QE}		200	-	-	133	-	-	100	-	-	ns

2. BUS TIMING


Item	Symbol	Test Condition	HD6809			HD68A09			HD68B09			Unit
			min	typ	max	min	typ	max	min	typ	max	
Address Delay	t _{AD}	Fig. 2, Fig. 3	-	-	200	-	-	140	-	-	110	ns
Address Valid to Q _{High}	t _{AQ}		50	-	-	25	-	-	15	-	-	ns
Peripheral Read Access Time (t _{UT} -t _{AD} -t _{DSR} =t _{ACC})	t _{ACC}		695	-	-	440	-	-	330	-	-	ns
Data Set Up Time (Read)	t _{DSR}		80	-	-	60	-	-	40	-	-	ns
Input Data Hold Time	t _{DHR}		10	-	-	10	-	-	10	-	-	ns
Address Hold Time	A ₀ ~A ₁₅ , R/ \bar{W}	t _{AH}	Fig. 2, Fig. 3 T _a =0~+75°C		20	-	-	20	-	-	ns	
			Fig. 2, Fig. 3 T _a =-20~0°C		10	-	-	10	-	-	ns	
Data Delay Time (Write)	t _{DDW}	Fig. 3	-	-	200	-	-	140	-	-	110	ns
Output Hold Time	t _{DHW}	Fig. 3 T _a =0~+75°C	30	-	-	30	-	-	30	-	-	ns
		Fig. 3 T _a =-20~0°C	20	-	-	20	-	-	20	-	-	ns

3. PROCESSOR CONTROL TIMING

Item	Symbol	Test Condition	HD6809			HD68A09			HD68B09			Unit
			min	typ	max	min	typ	max	min	typ	max	
MRDY Set Up Time	t _{PCSM}	Fig. 6~Fig. 10 Fig. 14, Fig. 15	125	-	-	125	-	-	110	-	-	ns
Interrupts Set Up Time	t _{PCCS}		200	-	-	140	-	-	110	-	-	ns
HALT Set Up Time	t _{PCSH}		200	-	-	140	-	-	110	-	-	ns
RES Set Up Time	t _{PCSR}		200	-	-	140	-	-	110	-	-	ns
DMA/BREQ Set Up Time	t _{PCSD}		125	-	-	125	-	-	110	-	-	ns
Processor Control Rise and Fall Time	t _{PCr} , t _{PCf}		-	-	100	-	-	100	-	-	100	ns
Crystal Oscillator Start Time	t _{RC}		-	-	50	-	-	30	-	-	30	ms

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)




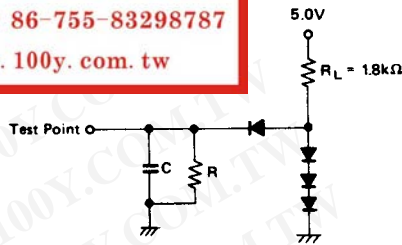

- C = 30pF (BA, BS)
- 130pF (D₀ ~ D₇, E, Q)
- 90pF (A₀ ~ A₁₅, R/W)
- R = 11kΩ (D₀ ~ D₇)
- 16kΩ (A₀ ~ A₁₅, E, Q, R/W)
- 24kΩ (BA, BS)


All diodes are 1S2074 or equivalent.
C includes Stray Capacitance.

Figure 1 Bus Timing Test Load

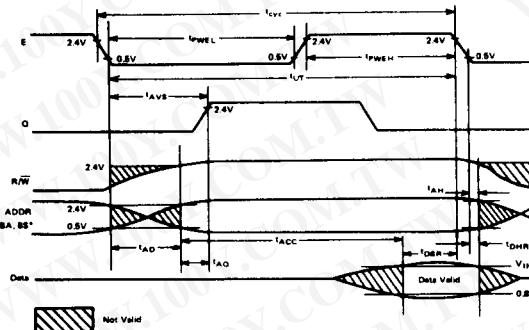

*Hold time for BA, BS not specified.

Figure 2 Read Data from Memory or Peripherals

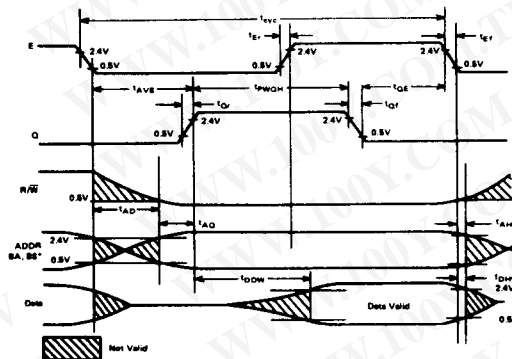

*Hold time for BA, BS not specified.

Figure 3 Write Data to Memory or Peripherals

PROGRAMMING MODEL

As shown in Figure 4, the HD6809 adds three registers to the set available in the HD6800. The added registers include a Direct Page Register, the User Stack pointer and a second Index Register.

Accumulators (A, B, D)

The A and B registers are general purpose accumulators which are used for arithmetic calculations and manipulation of data.

Certain instructions concatenate the A and B registers to form a single 16-bit accumulator. This is referred to as the D

register, and is formed with the A register as the most significant byte.

Direct Page Register (DP)

The Direct Page Register of the HD6809 serves to enhance the Direct Addressing Mode. The content of this register appears at the higher address outputs (A₈ ~ A₁₅) during Direct Addressing Instruction execution. This allows the direct mode to be used at any place in memory, under program control. To ensure HD6800 compatibility, all bits of this register are cleared during Processor Reset.

● **Index Registers (X, Y)**

The Index Registers are used in indexed mode of addressing. The 16-bit address in this register takes part in the calculation of effective addresses. This address may be used to point to data directly or may be modified by an optional constant or register

offset. During some indexed modes, the contents of the index register are incremented or decremented to point to the next item of tabular type data. All four pointer registers (X, Y, U, S) may be used as index registers.

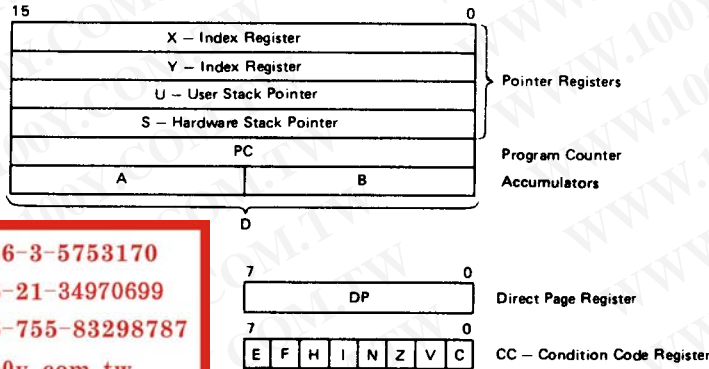


Figure 4 Programming Model of The Microprocessing Unit

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

● **Stack Pointer (U, S)**

The Hardware Stack Pointer (S) is used automatically by the processor during subroutine calls and interrupts. The stack pointers of the HD6809 point to the top of the stack, in contrast to the HD6800 stack pointer, which pointed to the next free location on the stack. The User Stack Pointer (U) is controlled exclusively by the programmer thus allowing arguments to be passed to and from subroutines with ease. Both Stack Pointers have the same indexed mode addressing capabilities as the X and Y registers, but also support Push and Pull instructions. This allows the HD6809 to be used efficiently as a stack processor, greatly enhancing its ability to support higher level languages and modular programming.

● **Program Counter**

The Program Counter is used by the processor to point to the address of the next instruction to be executed by the processor. Relative Addressing is provided allowing the Program Counter to be used like an index register in some situations.

● **Condition Code Register**

The Condition Code Register defines the State of the Processor at any given time. See Fig. 5.

■ **CONDITION CODE REGISTER DESCRIPTION**

● **Bit 0 (C)**

Bit 0 is the carry flag, and is usually the carry from the binary ALU. C is also used to represent a 'borrow' from subtract like instructions (CMP, NEG, SUB, SBC) and is the complement of the carry from the binary ALU.

● **Bit 1 (V)**

Bit 1 is the overflow flag, and is set to a one by an operation which causes a signed two's complement arithmetic overflow. This overflow is detected in an operation in which the carry from the MSB in the ALU does not match the carry from the MSB-1.

● **Bit 2 (Z)**

Bit 2 is the zero flag, and is set to a one if the result of the previous operation was identically zero.

● **Bit 3 (N)**

Bit 3 is the negative flag, which contains exactly the value of the MSB of the result of the preceding operation. Thus, a negative two's-complement result will leave N set to a one.

● **Bit 4 (I)**

Bit 4 is the \overline{IRQ} mask bit. The processor will not recognize interrupts from the \overline{IRQ} line if this bit is set to a one. NMI, FIRQ, IRQ, RES, and SWI all are set I to a one; SWI2 and SWI3 do not affect I.

● **Bit 5 (H)**

Bit 5 is the half-carry bit, and is used to indicate a carry from bit 3 in the ALU as a result of an 8-bit addition only (ADC or ADD). This bit is used by the DAA instruction to perform a BCD decimal add adjust operation. The state of this flag is




Figure 5 Condition Code Register Format



undefined in all subtract-like instructions.

● **Bit 6 (F)**

Bit 6 is the **FIRQ** mask bit. The processor will not recognize interrupts from the **FIRQ** line if this bit is a one. **NMI**, **FIRQ**, **SWI**, and **RES** all set F to a one. **IRQ**, **SWI2** and **SWI3** do not affect F.

● **Bit 7 (E)**

Bit 7 is the entire flag, and when set to a one indicates that the complete machine state (all the registers) was stacked, as opposed to the subset state (PC and CC). The E bit of the stacked CC is used on a return from interrupt (RTI) to determine the extent of the unstacking. Therefore, the current E left in the Condition Code Register represents past action.

■ **SIGNAL DESCRIPTION**

● **Power (V_{SS}, V_{CC})**

Two pins are used to supply power to the part: V_{SS} is ground or 0 volts, while V_{CC} is +5.0V ±5%.

● **Address Bus (A₀~A₁₅)**

Sixteen pins are used to output address information from the MPU onto the Address Bus. When the processor does not require the bus for a data transfer, it will output address FFFF₁₆, R/W = "High", and BS = "Low"; this is a "dummy access" or VMA cycle. Addresses are valid on the rising edge of Q (see Figs. 2 and 3). All address bus drivers are made high impedance when output Bus Available (BA) is "High". Each pin will drive one Schottky TTL load or four LS TTL loads, and typically 90 pF.

● **Data Bus (D₀~D₇)**

These eight pins provide communication with the system bi-directional data bus. Each pin will drive one Schottky TTL load or four LS TTL loads, and typically 130 pF.

● **Read/Write (R/W)**

This signal indicates the direction of data transfer on the data bus. A "Low" indicates that the MPU is writing data onto the data bus. R/W is made high impedance when BA is "High". R/W is valid on the rising edge of Q. Refer to Figs. 2 and 3.

● **Reset (RES)**

A "Low" level on this Schmitt-trigger input for greater than one bus cycle will reset the MPU, as shown in Fig. 6. The Reset vectors are fetched from locations FFFE₁₆ and FFFF₁₆ (Table 1) when Interrupt Acknowledge is true, (BA · BS=1). During initial power-on, the Reset line should be held "Low" until the clock oscillator is fully operational. See Fig. 7.

Because the HD6809 Reset pin has a Schmitt-trigger input with a threshold voltage higher than that of standard peripherals, a simple R/C network may be used to reset the entire system. This higher threshold voltage ensures that all peripherals are out of the reset state before the Processor.

Table 1 Memory Map for Interrupt Vectors

Memory Map For Vector Locations		Interrupt Vector Description
MS	LS	
FFFE	FFFF	RES
FFFC	FFFD	NMI
FFFA	FFFB	SWI
FFF8	FFF9	IRQ
FFF6	FFF7	FIRQ
FFF4	FFF5	SWI2
FFF2	FFF3	SWI3
FFF0	FFF1	Reserved

● **HALT**

A "Low" level on this input pin will cause the MPU to stop running at the end of the present instruction and remain halted indefinitely without loss of data. When halted, the BA output is driven "High" indicating the buses are high impedance. BS is also "High" which indicates the processor is in the Halt or Bus Grant state. While halted, the MPU will not respond to external real-time requests (FIRQ, IRQ) although DMA/BREQ will always be accepted, and NMI or RES will be latched for later response. During the Halt state Q and E continue to run normally. If the MPU is not running (RES, DMA/BREQ), a halted state (BA · BS=1) can be achieved by pulling HALT "Low" while RES is still "Low". If DAM/BREQ and HALT are both pulled "Low", the processor will reach the last cycle of the instruction (by reverse cycle stealing) where the machine will then become halted. See Figs. 8 and 16.

● **Bus Available, Bus Status (BA, BS)**

The BA output is an indication of an internal control signal which makes the MOS buses of the MPU high impedance. This signal does not imply that the bus will be available for more than one cycle. When BA goes "Low", an additional dead cycle will elapse before the MPU acquires the bus.

The BS output signal, when decoded with BA, represents the MPU state (valid with leading edge of Q).

Table 2 MPU State Definition

BA	BS	MPU State
0	0	Normal (Running)
0	1	Interrupt or RESET Acknowledge
1	0	SYNC Acknowledge
1	1	HALT or Bus Grant

Interrupt Acknowledge is indicated during both cycles of a hardware-vector-fetch (RES, NMI, FIRQ, IRQ, SWI, SWI2, SWI3). This signal, plus decoding of the lower four address lines, can provide the user with an indication of which interrupt level is being serviced and allow vectoring by device. See Table 1.

Sync Acknowledge is indicated while the MPU is waiting for external synchronization on an interrupt line.

Halt/Bus Grant is true when the HD6809 is in a Halt or Bus Grant condition.



勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)




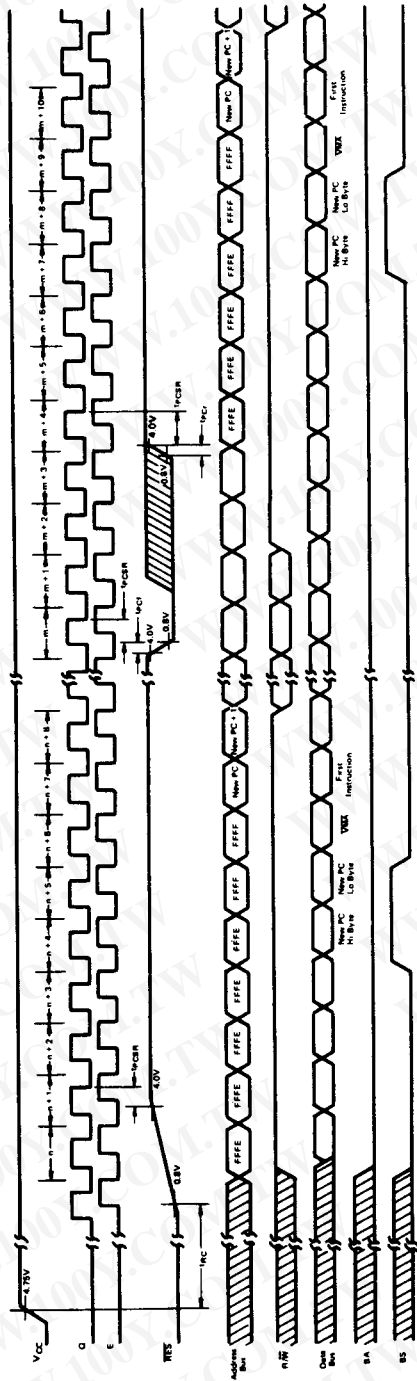


Figure 6 RES Timing

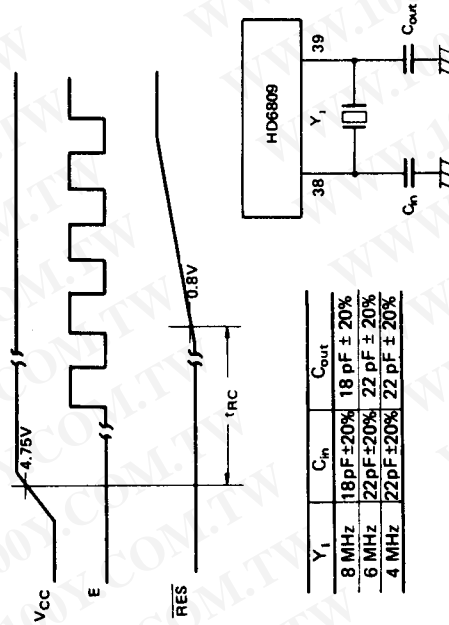

Y ₁	C _{in}	C _{out}
8 MHz	18 pF ± 20%	18 pF ± 20%
6 MHz	22 pF ± 20%	22 pF ± 20%
4 MHz	22 pF ± 20%	22 pF ± 20%

Figure 7 Crystal Connections and Oscillator Start Up

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

● **Non Maskable Interrupt (NMI)***

A negative edge on this input requests that a non-maskable interrupt sequence be generated. A non-maskable interrupt cannot be inhibited by the program, and also has a higher priority than $\overline{\text{FIRQ}}$, $\overline{\text{IRQ}}$ or software interrupts. During recognition of an NMI, the entire machine state is saved on the

hardware stack. After reset, an $\overline{\text{NMI}}$ will not be recognized until the first program load of the Hardware Stack Pointer (S). The pulse width of NMI "Low" must be at least one E cycle. If the $\overline{\text{NMI}}$ input does not meet the minimum set up with respect to Q, the interrupt will not be recognized until the next cycle. See Fig. 9.

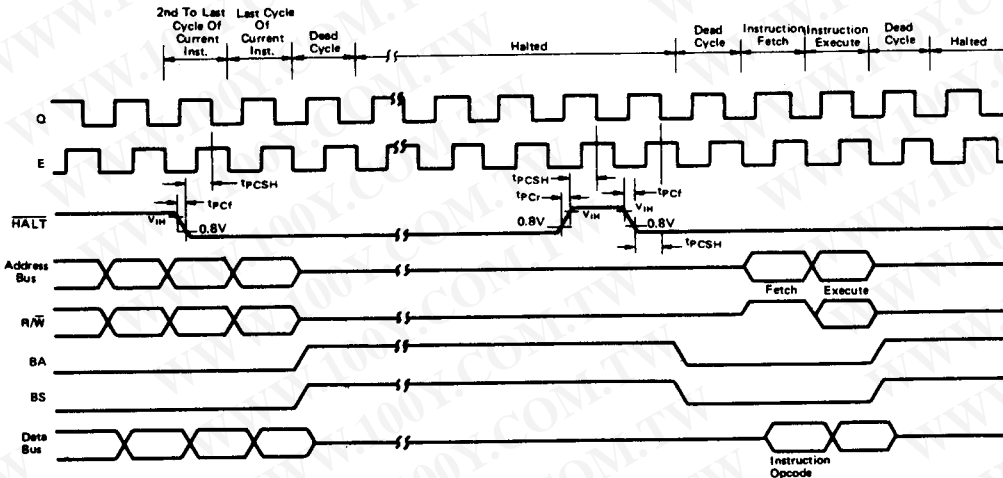


Figure 8 $\overline{\text{HALT}}$ and Single Instruction Execution for System Debug

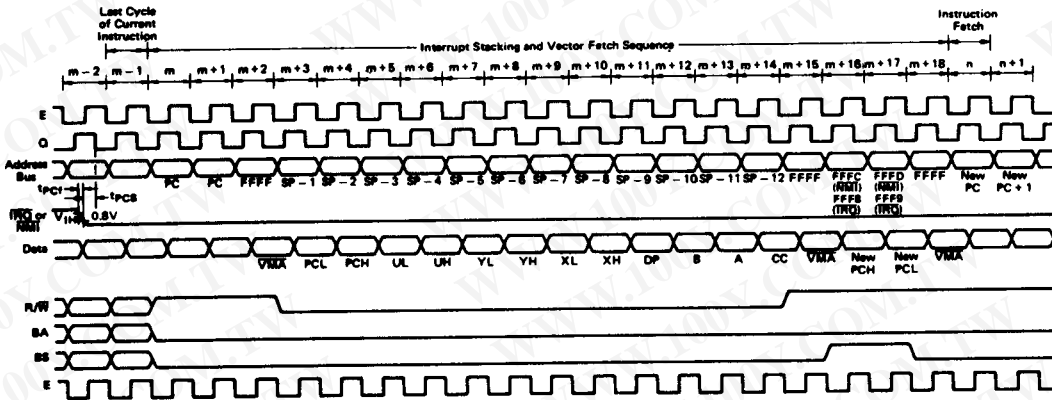


Figure 9 $\overline{\text{IRQ}}$ and NMI Interrupt Timing

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



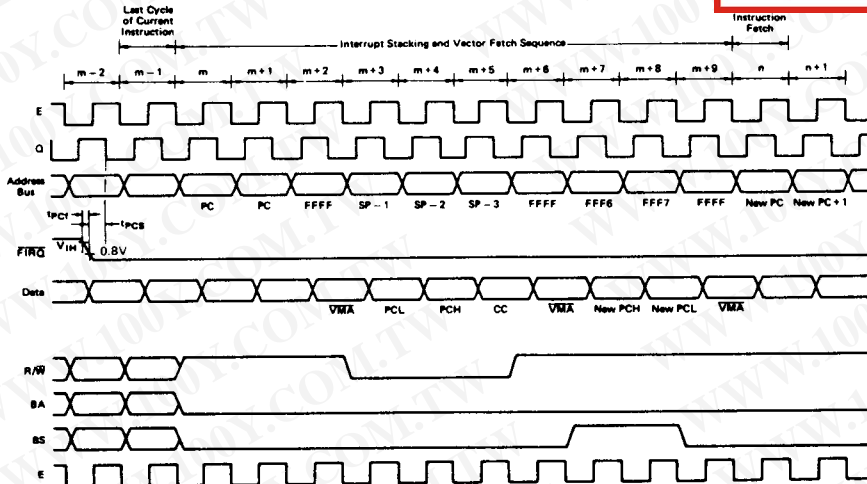


Figure 10 $\overline{\text{FIRQ}}$ Interrupt Timing

● **Fast-Interrupt Request ($\overline{\text{FIRQ}}$)***

A "Low" level on this input pin will initiate a fast interrupt sequence provided its mask bit (F) in the CC is clear. This sequence has priority over the standard Interrupt Request ($\overline{\text{IRQ}}$), and is fast in the sense that it stacks only the contents of the condition code register and the program counter. The interrupt service routine should clear the source of the interrupt before doing an RTI. See Fig. 10.

● **Interrupt Request ($\overline{\text{IRQ}}$)***

A "Low" level input on this pin will initiate an interrupt Request sequence provided the mask bit (I) in the CC is clear. Since $\overline{\text{IRQ}}$ stacks the entire machine state it provides a slower response to interrupts than $\overline{\text{FIRQ}}$. $\overline{\text{IRQ}}$ also has a lower priority than $\overline{\text{FIRQ}}$. Again, the interrupt service routine should clear the source of the interrupt before doing an RTI. See Fig. 9.

* **NMI, $\overline{\text{FIRQ}}$, and $\overline{\text{IRQ}}$ requests are sampled on the falling edge of Q. One cycle is required for synchronization before these interrupts are recognized. The pending interrupt(s) will not be serviced until completion of the current instruction unless a SYNC or CWA1 condition is present. If $\overline{\text{IRQ}}$ and $\overline{\text{FIRQ}}$ do not remain "Low" until completion of the current instruction they may not be recognized. However, NMI is latched and need only remain "Low" for one cycle.**

● **XTAL, EXTAL**

These inputs are used to connect the on-chip oscillator to an external parallel-resonant crystal. Alternately, the pin EXTAL may be used as a TTL level input for external timing by grounding XTAL. The crystal or external frequency is four times the bus frequency. See Fig. 7. Proper RF layout techniques should be observed in the layout of printed circuit boards.

< NOTE FOR BOARD DESIGN OF THE OSCILLATION CIRCUIT >

In designing the board, the following notes should be taken when the crystal oscillator is used.

- 1) Crystal oscillator and load capacity C_{in} , C_{out} must be placed

near the LSI as much as possible.

{ Normal oscillation may be disturbed when external noise is induced to pin 38 and 39.

- 2) Pin 38 and 39 signal line should be wired apart from other signal line as much as possible. Don't wire them in parallel.

{ Normal oscillation may be disturbed when E or Q signal is feedbacked to pin 38 and 39.

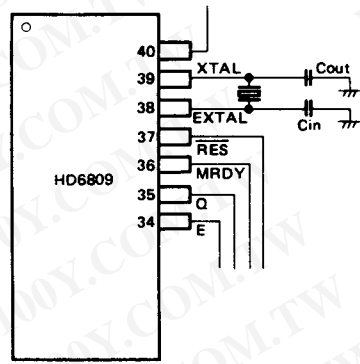


Figure 11 Board Design of the Oscillation Circuit.

< THE FOLLOWING DESIGN MUST BE AVOIDED >

A signal line or a power source line must not cross or go near the oscillation circuit line as shown in Fig. 12 to prevent the induction from these lines and perform the correct oscillation. The resistance among XTAL, EXTAL and other pins should be over 10MΩ.



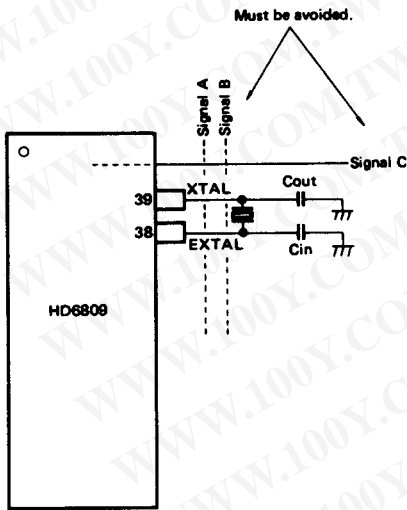


Figure 12 Example of Normal Oscillation may be Disturbed.

• E, Q

E is similar to the HD6800 bus timing signal ϕ_2 ; Q is a quadrature clock signal which leads E. Q has no parallel on the HD6800. Addresses from the MPU will be valid with the leading edge of Q. Data is latched on the falling edge of E. Timing for E and Q is shown in Fig. 13.

• MRDY

This input control signal allows stretching of E and Q to extend data-access time. E and Q operate normally while MRDY is "High". When MRDY is "Low", E and Q may be stretched in integral multiples of quarter (1/4) bus cycles, thus allowing interface to slow memories, as shown in Fig. 14. A maximum

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

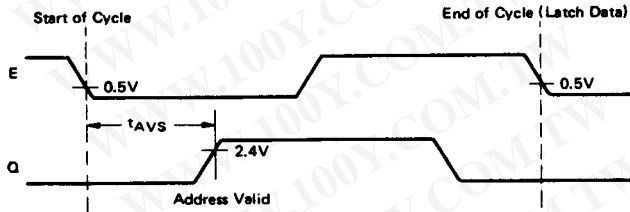


Figure 13 E/Q Relationship

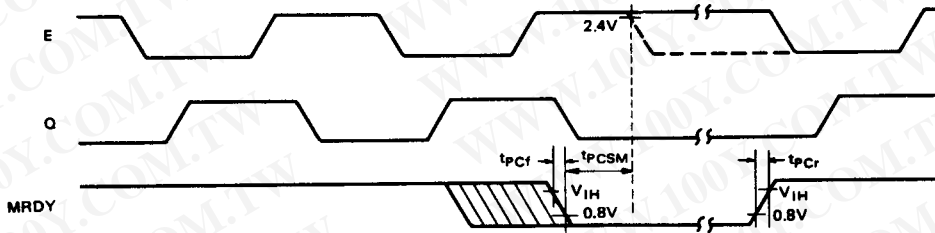


Figure 14 MRDY Timing

2

stretch is 10 microseconds. During nonvalid memory access (VMA cycles) MRDY has no effect on stretching E and Q; this inhibits slowing the processor during "don't care" bus accesses. MRDY may also be used to stretch clocks (for slow memory) when bus control has been transferred to an external device (through the use of HALT and DMA/BREQ).

Also MRDY has effect on stretching E and Q during Dead Cycle.

• **DMA/BREQ**

The DMA/BREQ input provides a method of suspending execution and acquiring the MPU bus for another use, as shown in Fig. 15. Typical uses include DMA and dynamic memory refresh.

Transition of DMA/BREQ should occur during Q. A "Low" level on this pin will stop instruction execution at the end of the current cycle. The MPU will acknowledge DMA/BREQ by setting BA and BS to "High" level. The requesting device will now have up to 15 bus cycles before the MPU retrieves the bus for self-refresh. Self-refresh requires one bus cycle with a lead-

ing and trailing dead cycle. See Fig. 16.


Typically, the DMA controller will request to use the bus by asserting DMA/BREQ pin "Low" on the leading edge of E. When the MPU replies by setting BA and BS to a one, that cycle will be a dead cycle used to transfer bus mastership to the DMA controller.

False memory accesses may be prevented during and dead cycles by developing a system DMAVMA signal which is "Low" in any cycle when BA has changed.

When BA goes "Low" (either as a result of DMA/BREQ = "High" or MPU self-refresh), the DMA device should be taken off the bus. Another dead cycle will elapse before the MPU accesses memory, to allow transfer of bus mastership without contention.

■ **MPU OPERATION**

During normal operation, the MPU fetches an instruction from memory and then executes the requested function. This

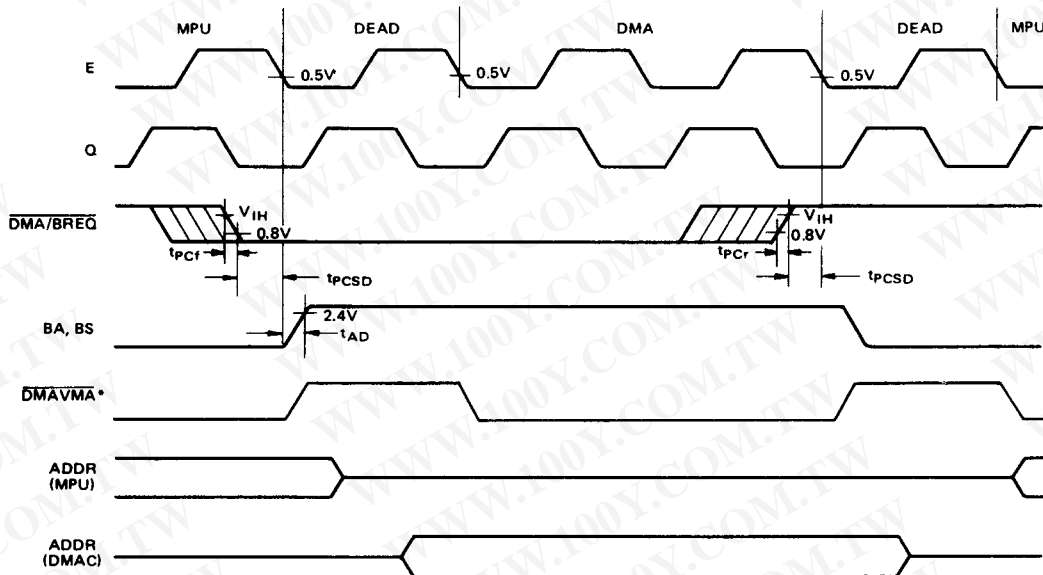


*DMAVMA is a signal which is developed externally, but is a system requirement for DMA.

Figure 15 Typical DMA Timing (<14 Cycles)

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



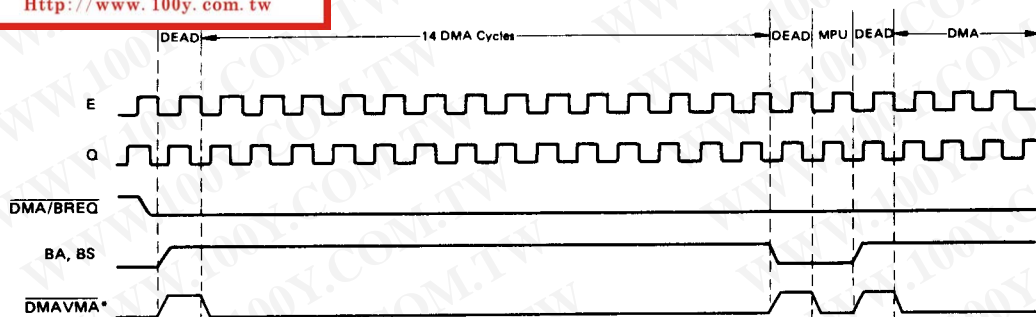

*DMAVMA is a signal which is developed externally, but is a system requirement for DMA.

Figure 16 Auto-Refresh DMA Timing
(Reverse Cycle Stealing)

sequence begins at **RES** and is repeated indefinitely unless altered by a special instruction or hardware occurrence. Software instructions that alter normal MPU operation are: **SWI**, **SWI2**, **SWI3**, **CWAI**, **RTI** and **SYNC**. An interrupt, **HALT** or **DMA/BREQ** can also alter the normal execution of instructions. Fig. 17 illustrates the flow chart for the HD6809.

■ ADDRESSING MODES

The basic instructions of any computer are greatly enhanced by the presence of powerful addressing modes. The HD6809 has the most complete set of addressing modes available on any microcomputer today. For example, the HD6809 has 59 basic instructions; however, it recognizes 1464 different variations of instructions and addressing modes. The addressing modes support modern programming techniques. The following addressing modes are available on the HD6809:

- (1) Implied (Includes Accumulator)
- (2) Immediate
- (3) Extended
- (4) Extended Indirect
- (5) Direct
- (6) Register
- (7) Indexed
 - Zero-Offset
 - Constant Offset
 - Accumulator Offset
 - Auto Increment/Decrement
- (8) Indexed Indirect
- (9) Relative
- (10) Program Counter Relative

● Implied (Includes Accumulator)

In this addressing mode, the opcode of the instruction contains all the address information necessary. Examples of Implied Addressing are: **ABX**, **DAA**, **SWI**, **ASRA**, and **CLRB**.

● Immediate Addressing

In Immediate Addressing, the effective address of the data is the location immediately following the opcode (i.e., the data to be used in the instruction immediately follows the opcode of the instruction). The HD6809 uses both 8 and 16-bit immediate values depending on the size of argument specified by the opcode. Examples of instructions with Immediate Addressing are:

```
LDA #$20
LDX #$F000
LDY #CAT
```

(NOTE) # signifies Immediate addressing, \$ signifies hexadecimal value.

● Extended Addressing

In Extended Addressing, the contents of the two bytes immediately following the opcode fully specify the 16-bit effective address used by the instruction. Note that the address generated by an extended instruction defines an absolute address and is not position independent. Examples of Extended Addressing include:

```
LDA CAT
STX MOUSE
LDD $2000
```

● Extended Indirect

As a special case of indexed addressing (discussed below), "1" level of indirection may be added to Extended Addressing. In Extended Indirect, the two bytes following the postbyte of an Indexed instruction contain the address of the data.

```
LDA [CAT]
LDX [ $FFFE ]
STU [DOG]
```

● Direct Addressing

Direct addressing is similar to extended addressing except that only one byte of address follows the opcode. This byte specifies the lower 8-bit of the address to be used. The upper 8-bit of the address are supplied by the direct page register. Since only one byte of address is required in direct addressing, this mode requires less memory and executes faster than extended addressing. Of course, only 256 locations (one page) can be



accessed without redefining the contents of the DP register. Since the DP register is set to \$00 on Reset, direct addressing on the HD6809 is compatible with direct addressing on the HD6800. Indirection is not allowed in direct addressing. Some examples of direct addressing are:

```
LDA    $30
SETDP  $10 (Assembler directive)
LDB    $1030
LDD    <CAT
```

(NOTE) < is an assembler directive which forces direct addressing.

• Register Addressing


Some opcodes are followed by a byte that defines a register or set of registers to be used by the instruction. This is called a postbyte. Some examples of register addressing are:

```
TFR    X, Y    Transfers X into Y
EXG    A, B    Exchanges A with B
PSHS   A, B, X, Y  Push Y, X, B and A onto S
PULU   X, Y, D  Pull D, X, and Y from U
```

• Indexed Addressing

In all indexed addressing, one of the pointer registers (X, Y, U, S, and sometimes PC) is used in a calculation of the effective address of the operand to be used by the instruction. Five basic types of indexing are available and are discussed below. The postbyte of an indexed instruction specifies the basic type and variation of the addressing mode as well as the pointer register to be used. Fig. 18 lists the legal formats for the postbyte. Table 3 gives the assembler form and the number of cycles and bytes

Post-Byte Register Bit								Indexed Addressing Mode
7	6	5	4	3	2	1	0	
0	R	R	x	x	x	x	x	EA = ,R + 5 Bit Offset
1	R	R	0	0	0	0	0	,R +
1	R	R	0/1	0	0	0	1	,R ++
1	R	R	0	0	0	1	0	, -R
1	R	R	0/1	0	0	1	1	, -- R
1	R	R	0/1	0	1	0	0	EA = ,R + 0 Offset
1	R	R	0/1	0	1	0	1	EA = ,R + ACCB Offset
1	R	R	0/1	0	1	1	0	EA = ,R + ACCA Offset
1	R	R	0/1	1	0	0	0	EA = ,R + 8 Bit Offset
1	R	R	0/1	1	0	0	1	EA = ,R + 16 Bit Offset
1	R	R	0/1	1	0	1	1	EA = ,R + D Offset
1	x	x	0/1	1	1	0	0	EA = ,PC + 8 Bit Offset
1	x	x	0/1	1	1	0	1	EA = ,PC + 16 Bit Offset
1	R	R	1	1	1	1	1	EA = [,Address]

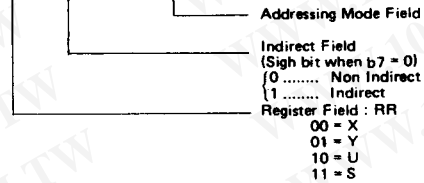

x = Don't Care

Figure 18 Index Addressing Postbyte Register Bit Assignments

Table 3 Indexed Addressing Mode

Type	Forms	Non Indirect			Indirect		
		Assembler Form	Postbyte OP Code	+ + ~ #	Assembler Form	Postbyte OP Code	+ + ~ #
Constant Offset From R (2's Complement Offsets)	No Offset	,R	1RR00100	0 0	[,R]	1RR10100	3 0
	5 Bit Offset	n, R	0RRnnnnn	1 0	defaults to 8-bit		
	8 Bit Offset	n, R	1RR01000	1 1	[n, R]	1RR11000	4 1
	16 Bit Offset	n, R	1RR01001	4 2	[n, R]	1RR11001	7 2
Accumulator Offset From R (2's Complement Offsets)	A Register Offset	A, R	1RR00110	1 0	[A, R]	1RR10110	4 0
	B Register Offset	B, R	1RR00101	1 0	[B, R]	1RR10101	4 0
	D Register Offset	D, R	1RR01011	4 0	[D, R]	1RR11011	7 0
Auto Increment/Decrement R	Increment By 1	,R +	1RR00000	2 0	not allowed		
	Increment By 2	,R ++	1RR00001	3 0	[,R ++]	1RR10001	6 0
	Decrement By 1	, -R	1RR00010	2 0	not allowed		
	Decrement By 2	, -- R	1RR00011	3 0	[, -- R]	1RR10011	6 0
Constant Offset From PC (2's Complement Offsets)	8 Bit Offset	n, PCR	1xx01100	1 1	[n, PCR]	1xx11100	4 1
	16 Bit Offset	n, PCR	1xx01101	5 2	[n, PCR]	1xx11101	8 2
Extended Indirect	16 Bit Address	-	-	-	[n]	10011111	5 2

R = X, Y, U or S RR:
 x = Don't Care 00 = X
 01 = Y
 10 = U
 11 = S

~ and # indicate the number of additional cycles and bytes for the particular variation.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



added to the basic values for indexed addressing for each variation.

Zero-Offset Indexed

In this mode, the selected pointer register contains the effective address of the data to be used by the instruction. This is the fastest indexing mode.

Examples are:

```
LDD 0,X
LDA S
```

Constant Offset Indexed

In this mode, a two's-complement offset and the contents of one of the pointer registers are added to form the effective address of the operand. The pointer register's initial content is unchanged by the addition.

Three sizes of offsets are available:

- 5-bit (-16 to +15)
- 8-bit (-128 to +127)
- 16-bit (-32768 to +32767)

The two's complement 5-bit offset is included in the postbyte and, therefore, is most efficient in use of bytes and cycles. The two's complement 8-bit offset is contained in a single byte following the postbyte. The two's complement 16-bit offset is in the two bytes following the postbyte. In most cases the programmer need not be concerned with the size of this offset since the assembler will select the optimal size automatically.

Examples of constant-offset indexing are:

```
LDA 23,X
LDX -2,S
LDY 300,X
LDU CAT,Y
```

Accumulator-Offset Indexed

This mode is similar to constant offset indexed except that the two's-complement value in one of the accumulators (A, B or D) and the contents of one of the pointer registers are added to form the effective address of the operand. The contents of both the accumulator and the pointer register are unchanged by the addition. The postbyte specifies which accumulator to use as an offset and no additional bytes are required. The advantage of an accumulator offset is that the value of the offset can be calculated by a program at run-time.

Some examples are:

```
LDA B,Y
LDX D,Y
LEAX B,X
```

Auto Increment/Decrement Indexed

In the auto increment addressing mode, the pointer register contains the address of the operand. Then, after the pointer register is used it is incremented by one or two. This addressing mode is useful in stepping through tables, moving data, or for the creation of software stacks. In auto decrement, the pointer register is decremented prior to use as the address of the data. The use of auto decrement is similar to that of auto increment; but the tables, etc., are scanned from the "High" to "Low" addresses. The size of the increment/decrement can be either one or two to allow for tables of either 8 or 16-bit data to be accessed and is selectable by the programmer. The pre-decrement, post-increment nature of these modes allow them to be used to create additional software stacks that behave identically to the U and S stacks.

Some examples of the auto increment/decrement addressing modes are:

```
LDA ,X+
STD ,Y++
LDB ,-Y
LDX ,--S
```

Care should be taken in performing operations on 16-bit pointer registers (X, Y, U, S) where the same register is used to calculate the effective address.

Consider the following instruction:

```
STX 0, X++ (X initialized to 0)
```

The desired result is to store a 0 in locations \$0000 and \$0001 then increment X to point to \$0002. In reality, the following occurs:

- 0 → temp calculate the EA; temp is a holding register
- X + 2 → X perform autoincrement
- X → (temp) do store operation

● **Indexed Indirect**

All of the indexing modes with the exception of auto increment/decrement by one, or a ±4-bit offset may have an additional level of indirection specified. In indirect addressing, the effective address is contained at the location specified by the contents of the Index register plus any offset. In the example below, the A accumulator is loaded indirectly using an effective address calculated from the Index register and an offset.

```
Before Execution
A = ×× (don't care)
X = $F000
```

```
$0100 LDA [$10,X]      EA is now $F010
```

```
$F010 $F1              $F150 is now the
$F011 $50              new EA
```

```
$F150 $AA
After Execution
A = $AA Actual Data Loaded
X = $F000
```

All modes of indexed indirect are included except those which are meaningless (e.g., auto increment/decrement by 1 indirect). Some examples of indexed indirect are:

```
LDA [X]
LDD [10,S]
LDA [B,Y]
LDD [X++]
```

● **Relative Addressing**

The byte(s) following the branch opcode is (are) treated as a signed offset which may be added to the program counter. If the branch condition is true then the calculated address (PC + signed offset) is loaded into the program counter. Program execution continues at the new location as indicated by the PC; short (1 byte offset) and long (2 bytes offset) relative addressing modes are available. All of memory can be reached in long relative addressing as an effective address is interpreted modulo 2¹⁶. Some examples of relative addressing are:

```
BEQ    CAT    (short)
BGT    DOG    (short)
CAT    LBEG    RAT    (long)
DOG    LBGT    RABBIT (long)
```



•
•
•
•
RAT NOP
RABBIT NOP

● Program Counter Relative

The PC can be used as the pointer register with 8 or 16-bit signed offsets. As in relative addressing, the offset is added to the current PC to create the effective address. The effective address is then used as the address of the operand or data. Program Counter Relative Addressing is used for writing position independent programs. Tables related to a particular routine will maintain the same relationship after the routine is moved, if referenced relative to the Program Counter. Examples are:

```
LDA CAT, PCR
LEAX TABLE, PCR
```

Since program counter relative is a type of indexing, an additional level of indirection is available.

```
LDA [CAT, PCR]
LDU [DOG, PCR]
```

■ HD6809 INSTRUCTION SET

The instruction set of the HD6809 is similar to that of the HD6800 and is upward compatible at the source code level. The number of opcodes has been reduced from 72 to 59, but because of the expanded architecture and additional addressing modes, the number of available opcodes (with different addressing modes) has risen from 197 to 1464.

Some of the new instructions and addressing modes are described in detail below:


● PSHU/PSHS

The push instructions have the capability of pushing onto either the hardware stack (S) or user stack (U) any single register, or set of registers with a single instruction.

● PULU/PULS

The pull instructions have the same capability of the push instruction, in reverse order. The byte immediately following the push or pull opcode determines which register or registers are to be pushed or pulled. The actual PUSH/PULL sequence is fixed; each bit defines a unique register to push or pull, as shown in below.

PUSH/PULL POST BYTE



← Pull Order Push Order →

PC	U	Y	X	DP	B	A	CC
FFFF...	← increasing memory address					0000
PC	S	Y	X	DP	B	A	CC


● TFR/EXG

Within the HD6809, any register may be transferred to or exchanged with another of like-size; i.e., 8-bit to 8-bit or 16-bit to 16-bit. Bits 4-7 of postbyte define the source register, while bits 0-3 represent the destination register. Three are denoted as follows:

0000 - D	0101 - PC
0001 - X	1000 - A
0010 - Y	1001 - B
0011 - U	1010 - CC
0100 - S	1011 - DP

(NOTE) All other combinations are undefined and INVALID.

TRANSFER/EXCHANGE POST BYTE



● LEAX/LEAY/LEAU/LEAS

The LEA (Load Effective Address) works by calculating the effective address used in an indexed instruction and stores that address value, rather than the data at that address, in a pointer register. This makes all the features of the internal addressing hardware available to the programmer. Some of the implications of this instruction are illustrated in Table 4.

The LEA instruction also allows the user to access data in a position independent manner. For example:

```
LEAX MSG1, PCR
LBSR PDATA (Print message routine)
```

MSG1 FCC 'MESSAGE'

This sample program prints 'MESSAGE'. By writing MSG1, PCR, the assembler computes the distance between the present address and MSG1. This result is placed as a constant into the LEAX instruction which will be indexed from the PC value at the time of execution. No matter where the code is located, when it is executed, the computed offset from the PC will put the absolute address of MSG1 into the X pointer register. This code is totally position independent.

The LEA instructions are very powerful and use an internal holding register (temp). Care must be exercised when using the LEA instructions with the autoincrement and autodecrement addressing modes due to the sequence of internal operations. The LEA internal sequence is outlined as follows:

LEAa, b+ (any of the 16-bit pointer registers X, Y, U or S may be substituted for a and b.)


1. b → temp (calculate the EA)
2. b + 1 → b (modify b, postincrement)
3. temp → a (load a)

- LEAa, - b
1. b - 1 → temp (calculate EA with predecrement)
 2. b - 1 → b (modify b, predecrement)
 3. temp → a (load a)

Autoincrement-by-two and autodecrement-by-two instructions work similarly. Note that LEAX, X+ does not change X, however LEAX, -X does decrement X. LEAX 1, X should be used to increment X by one.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
 Http://www.100y.com.tw



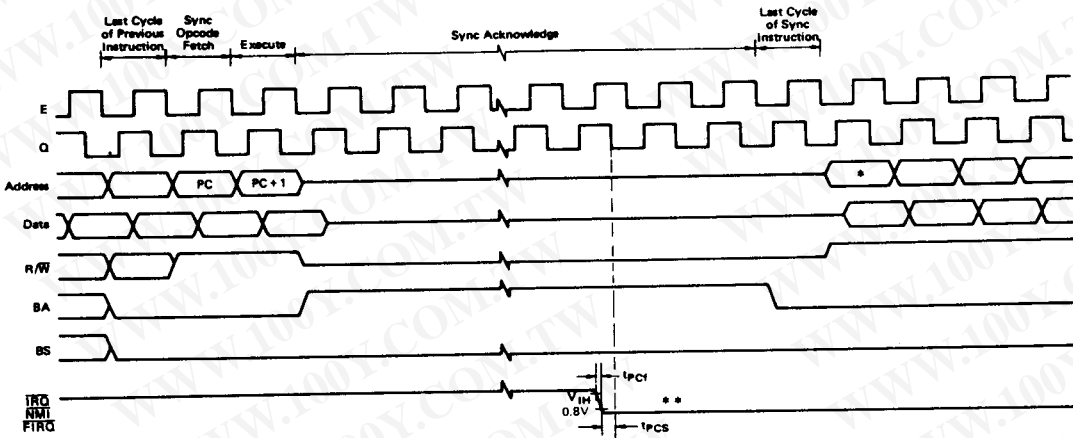


- (NOTES)
- If the associated mask bit is set when the interrupt is requested, this cycle will be an instruction fetch from address location PC + 1. However, if the interrupt is accepted (NMI or an unmasked FIRQ or IRQ) interrupt processing continues with this cycle as (m) on Figure 9 and 10 (Interrupt Timing).
 - If mask bits are clear, IRQ and FIRQ must be held "Low" for three cycles to guarantee that interrupt will be taken, although only one cycle is necessary to bring the processor out of SYNC.

Figure 19 Sync Timing




勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

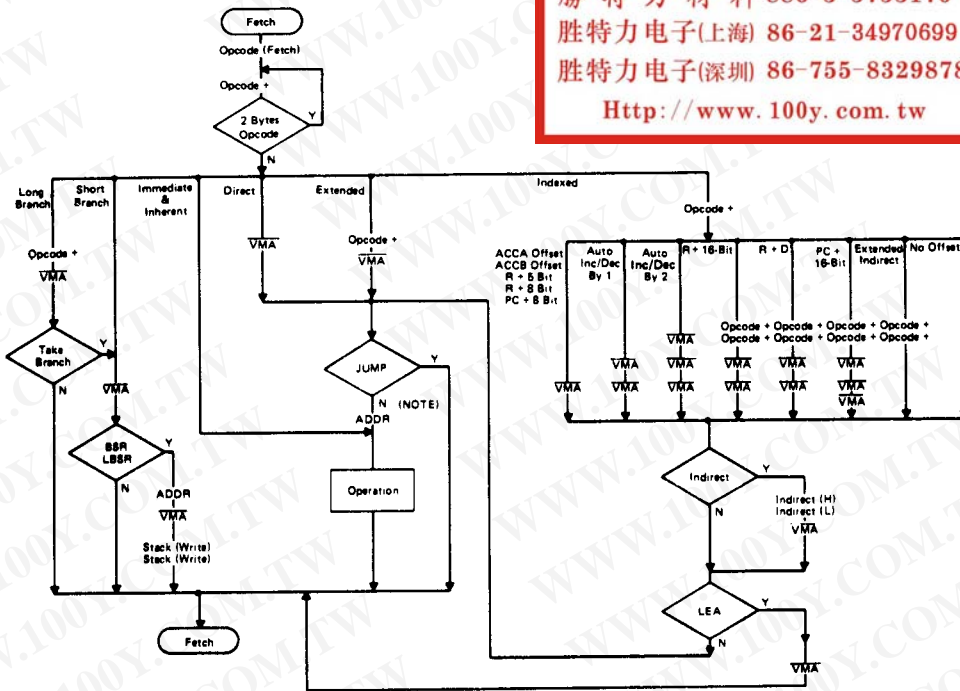

(NOTE) Write operation during store instruction.

Figure 20 Address Bus Cycle-by-Cycle Performance



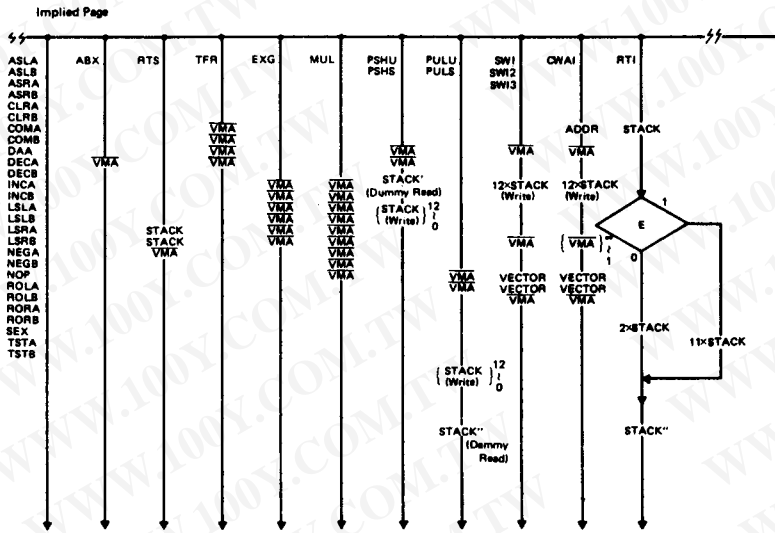

(NOTE) STACK': Address stored in stack pointer before execution.
 STACK'': Address set to stack pointer as the result of the execution.

Figure 20 Address Bus Cycle-by-Cycle Performance (Continued)

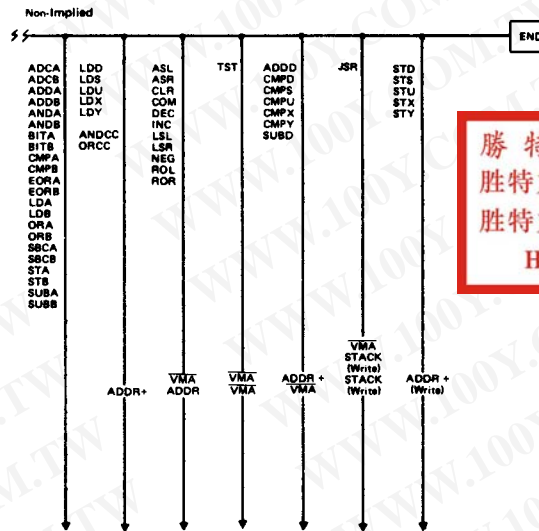


Figure 20 Address Bus Cycle-by-Cycle Performance (Continued)

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Table 5 8-Bit Accumulator and Memory Instructions

Mnemonic(s)	Operation
ADCA, ADCB	Add memory to accumulator with carry
ADDA, ADDB	Add memory to accumulator
ANDA, ANDB	And memory with accumulator
ASL, ASLA, ASLB	Arithmetic shift of accumulator or memory left
ASR, ASRA, ASRB	Arithmetic shift of accumulator or memory right
BITA, BITB	Bit test memory with accumulator
CLR, CLRA, CLRB	Clear accumulator or memory location
CMPA, CMPB	Compare memory from accumulator
COM, COMA, COMB	Complement accumulator or memory location
DAA	Decimal adjust A accumulator
DEC, DECA, DECB	Decrement accumulator or memory location
EORA, EORB	Exclusive or memory with accumulator
EXG R1, R2	Exchange R1 with R2 (R1, R2 = A, B, CC, DP)
INC, INCA, INCB	Increment accumulator or memory location
LDA, LDB	Load accumulator from memory
LSL, LSLA, LSLB	Logical shift left accumulator or memory location
LSR, LSRA, LSRB	Logical shift right accumulator or memory location
MUL	Unsigned multiply ($A \times B \rightarrow D$)
NEG, NEGA, NEGB	Negate accumulator or memory
ORA, ORB	Or memory with accumulator
ROL, ROLA, ROLB	Rotate accumulator or memory left
ROR, RORA, RORB	Rotate accumulator or memory right
SBCA, SBCB	Subtract memory from accumulator with borrow
STA, STB	Store accumulator to memory
SUBA, SUBB	Subtract memory from accumulator
TST, TSTA, TSTB	Test accumulator or memory location
TFR R1, R2	Transfer R1 to R2 (R1, R2 = A, B, CC, DP)

(NOTE) A, B, CC or DP may be pushed to (pulled from) either stack with PSHS, PSHU (PULS, PULU) instructions.

Table 6 16-Bit Accumulator and Memory Instructions

Mnemonic(s)	Operation
ADDD	Add memory to D accumulator
CMPD	Compare memory from D accumulator
EXG D, R	Exchange D with X, Y, S, U or PC
LDD	Load D accumulator from memory
SEX	Sign Extend B accumulator into A accumulator
STD	Store D accumulator to memory
SUBD	Subtract memory from D accumulator
TFR D, R	Transfer D to X, Y, S, U or PC
TFR R, D	Transfer X, Y, S, U or PC to D

(NOTE) D may be pushed (pulled) to either stack with PSHS, PSHU (PULS, PULU) instructions.

2

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



Table 7 Index Register/Stack Pointer Instructions

Mnemonic(s)	Operation
CMP _S , CMP _U	Compare memory from stack pointer
CMP _X , CMP _Y	Compare memory from index register
EXG R1, R2	Exchange D, X, Y, S, U or PC with D, X, Y, S, U or PC
LEAS, LEAU	Load effective address into stack pointer
LEAX, LEAY	Load effective address into index register
LDS, LDU	Load stack pointer from memory
LDX, LDY	Load index register from memory
PSHS	Push A, B, CC, DP, D, X, Y, U, or PC onto hardware stack
PSHU	Push A, B, CC, DP, D, X, Y, S, or PC onto user stack
PULS	Pull A, B, CC, DP, D, X, Y, U or PC from hardware stack
PULU	Pull A, B, CC, DP, D, X, Y, S or PC from user stack
STS, STU	Store stack pointer to memory
STX, STY	Store index register to memory
TFR R1, R2	Transfer D, X, Y, S, U or PC to D, X, Y, S, U or PC
ABX	Add B accumulator to X (unsigned)

Table 8 Branch Instructions

Mnemonic(s)	Operation
SIMPLE BRANCHES	
BEQ, LBEQ	Branch if equal
BNE, LBNE	Branch if not equal
BMI, LBMI	Branch if minus
BPL, LBPL	Branch if plus
BCS, LBCS	Branch if carry set
BCC, LBCC	Branch if carry clear
BVS, LBVS	Branch if overflow set
BVC, LBVC	Branch if overflow clear
SIGNED BRANCHES	
BGT, LBGT	Branch if greater (signed)
BGE, LBGE	Branch if greater than or equal (signed)
BEQ, LBEQ	Branch if equal
BLE, LBLE	Branch if less than or equal (signed)
BLT, LBLT	Branch if less than (signed)
UNSIGNED BRANCHES	
BHI, LBHI	Branch if higher (unsigned)
BHS, LBHS	Branch if higher or same (unsigned)
BEQ, LBEQ	Branch if equal
BLS, LBLS	Branch if lower or same (unsigned)
BLO, LBLO	Branch if lower (unsigned)
OTHER BRANCHES	
BSR, LBSR	Branch to subroutine
BRA, LBRA	Branch always
BRN, LBRN	Branch never

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)









Table 9 Miscellaneous Instructions

Mnemonic(s)	Operation
ANDCC	AND condition code register
CWA1	AND condition code register, then wait for interrupt
NOP	No operation
ORCC	OR condition code register
JMP	Jump
JSR	Jump to subroutine
RTI	Return from interrupt
RTS	Return from subroutine
SWI, SWI2, SWI3	Software interrupt (absolute indirect)
SYNC	Synchronize with interrupt line

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Table 10. HD6809 Instruction Set Table

INSTRUCTION/ FORMS	IMM		DIRECT		EXTND		IMMED		INDEX		RELATIVE		DESCRIPTION	7	6	5	4	3	2	1	0	
	OP	#	OP	#	OP	#	OP	#	OP	#	OP	#		E	F	H	I	N	Z	V	C	
ABX	3A	3	1										B ← X ← X (UNSIGNED)	●	●	●	●	●	●	●	●	
ADC	ADCA	99	4	2	B9	5	3	89	2	2	A9	4	+2+	A ← M + C → A	●	●	1	●	1	1	1	1
	ADCB	D9	4	2	F9	5	3	C9	2	2	E9	4	+2+	B ← M + C → B	●	●	1	●	1	1	1	1
ADD	ADDA	9B	4	2	BB	5	3	8B	2	2	AB	4	+2+	A ← M + A	●	●	1	●	1	1	1	1
	ADDB	DB	4	2	FB	5	3	CB	2	2	EB	4	+2+	B ← M + B	●	●	1	●	1	1	1	1
	ADDD	D3	6	2	F3	7	3	C3	4	3	E3	6	+2+	D ← M; M ← 1 → D	●	●	●	●	1	1	1	1
AND	ANDA	94	4	2	B4	5	3	84	2	2	A4	4	+2+	A ← M → A	●	●	●	●	1	1	R	●
	ANDB	D4	4	2	F4	5	3	C4	2	2	E4	4	+2+	B ← M → B	●	●	●	●	1	1	R	●
	ANDCC							1C	3	2				C ← IMM → CC	(⊕)	
ASL	ASLA	48	2	1									A) 	●	●	⊕	●	1	1	1	1	
	ASLB	58	2	1									B) 	●	●	⊕	●	1	1	1	1	
	ASL				08	6	2	78	7	3			M) 	●	●	⊕	●	1	1	1	1	
ASR	ASRA	47	2	1									A) 	●	●	⊕	●	1	1	1	1	
	ASRB	57	2	1									B) 	●	●	⊕	●	1	1	1	1	
	ASR				07	6	2	77	7	3			M) 	●	●	⊕	●	1	1	1	1	
BCC	BCC										24	3	2	Branch C = 0	●	●	●	●	●	●	●	
	LBCC										10	5(6)	4	Long Branch C = 0	●	●	●	●	●	●	●	
BCS	BCS										25	3	2	Branch C = 1	●	●	●	●	●	●	●	
	LBCS										10	5(6)	4	Long Branch C = 1	●	●	●	●	●	●	●	
BEQ	BEQ										25	3	2	Branch Z = 1	●	●	●	●	●	●	●	
	LBEQ										10	5(6)	4	Long Branch Z = 1	●	●	●	●	●	●	●	
BGE	BGE										27	3	2	Branch N ⊕ V = 0	●	●	●	●	●	●	●	
	LBGE										10	5(6)	4	Long Branch N ⊕ V = 0	●	●	●	●	●	●	●	
BGT	BGT										2E	3	2	Branch Z ∨ (N ⊕ V) = 0	●	●	●	●	●	●	●	
	LBGT										10	5(6)	4	Long Branch Z ∨ (N ⊕ V) = 0	●	●	●	●	●	●	●	
BHI	BHI										2E	3	2	Branch C ∨ Z = 0	●	●	●	●	●	●	●	
	LBHI										10	5(6)	4	Long Branch C ∨ Z = 0	●	●	●	●	●	●	●	
BHS	BHS										22	3	2	Branch C = 0	●	●	●	●	●	●	●	
	LBHS										10	5(6)	4	Long Branch C = 0	●	●	●	●	●	●	●	
BIT	BITA	95	4	2	B5	5	3	85	2	2	A5	4	+2+	Bit Test A (M ∧ A)	●	●	●	●	1	1	R	●
	BITB	D5	4	2	F5	5	3	C5	2	2	E5	4	+2+	Bit Test B (M ∧ B)	●	●	●	●	1	1	R	●
BLE	BLE										2F	3	2	Branch Z ∨ (N ⊕ V) = 1	●	●	●	●	●	●	●	
	LBLE										10	5(6)	4	Long Branch Z ∨ (N ⊕ V) = 1	●	●	●	●	●	●	●	
BLO	BLO										25	3	2	Branch C = 1	●	●	●	●	●	●	●	
	LBLO										10	5(6)	4	Long Branch C = 1	●	●	●	●	●	●	●	
BLS	BLS										25	3	2	Branch C ∨ Z = 1	●	●	●	●	●	●	●	
	LBLS										10	5(6)	4	Long Branch C ∨ Z = 1	●	●	●	●	●	●	●	
BLT	BLT										2D	3	2	Branch N ⊕ V = 1	●	●	●	●	●	●	●	
	LBLT										10	5(6)	4	Long Branch N ⊕ V = 1	●	●	●	●	●	●	●	
BMI	BMI										2B	3	2	Branch N = 1	●	●	●	●	●	●	●	
	LBMI										10	5(6)	4	Long Branch N = 1	●	●	●	●	●	●	●	

(Continued)



INSTRUCTION/ FORMS	MP REG		DIRECT		EXTND		IMMED		INDEX		RELATIVE		DESCRIPTION	7	6	5	4	3	2	1	0		
	ACC	MP	OP	#	OP	#	OP	#	OP	#	OP	#		OP	#	E	F	H	I	N	Z	V	C
BNE	BNE												26 3 2	Branch Z = 0	●	●	●	●	●	●	●	●	
															10 5/6 4	Long Branch	●	●	●	●	●	●	●
BPL	BPL												26	Z = 0	●	●	●	●	●	●	●	●	
															2A 3 2	Branch N = 0	●	●	●	●	●	●	●
BPL	LBPL												10 5/6 4	Long Branch	●	●	●	●	●	●	●	●	
															2A	N = 0	●	●	●	●	●	●	●
BRA	BRA												20 3 2	Branch Always	●	●	●	●	●	●	●	●	
															16 5 3	Long Branch Always	●	●	●	●	●	●	●
BRN	BRN												21 3 2	Branch Never	●	●	●	●	●	●	●	●	
															10 5 4	Long Branch Never	●	●	●	●	●	●	●
BSR	BSR												8 D 7 2	Branch to Subroutine	●	●	●	●	●	●	●	●	
															17 9 3	Long Branch to Subroutine	●	●	●	●	●	●	●
BVC	BVC												2 8 3 2	Branch V = 0	●	●	●	●	●	●	●	●	
															10 5/6 4	Long Branch	●	●	●	●	●	●	●
BVC	LBVC												2 8	V = 0	●	●	●	●	●	●	●	●	
															2 9 3 2	Branch V = 1	●	●	●	●	●	●	●
BVS	BVS												10 5/6 4	Long Branch	●	●	●	●	●	●	●	●	
															2 9	V = 1	●	●	●	●	●	●	●
CLR	CLRA	4 F 2 1												0 → A	●	●	●	●	R	S	R	R	
															5 F 2 1	0 → B	●	●	●	●	R	S	R
CMP	CLR													0 → M	●	●	●	●	R	S	R	R	
															0 F 6 2 7 F 7 3	Compare M from A	●	●	●	●	Ⓟ	●	↑
CMP	CMPA													Compare M from B	●	●	●	●	Ⓟ	●	↑	↑	↑
															D 1 4 2 F 1 5 3 C 1 2 2 E 1 4 + 2 +	Compare M:M + 1	●	●	●	●	●	●	↑
CMP	CMPB													from D	●	●	●	●	↑	↑	↑	↑	
															10 7 3 10 8 4 10 5 4 10 7 + 3 +	Compare M:M + 1	●	●	●	●	●	●	↑
CMP	CMPD													from S	●	●	●	●	↑	↑	↑	↑	
															9 3	Compare M:M + 1	●	●	●	●	●	●	↑
CMP	CMPS													from U	●	●	●	●	↑	↑	↑	↑	
															11 7 3 11 8 4 11 5 4 11 7 + 3 +	Compare M:M + 1	●	●	●	●	●	●	↑
CMP	CMPU													from X	●	●	●	●	↑	↑	↑	↑	
															9 3	Compare M:M + 1	●	●	●	●	●	●	↑
CMP	CMPX													from Y	●	●	●	●	↑	↑	↑	↑	
															9 C 6 2 B C 7 3 8 C 4 3 A C 6 + 2 +	Compare M:M + 1	●	●	●	●	●	●	↑
COM	COMA	4 3 2 1												A → A	●	●	●	●	↑	↑	R	S	
															5 3 2 1	B → B	●	●	●	●	↑	↑	R
COM	COMB													M → M	●	●	●	●	↑	↑	R	S	
															0 3 6 2 7 3 7 3	CC ^ IMM - CC	●	●	●	●	↑	↑	R
CWA	COM	3 C 20 2												Wait for Interrupt	●	●	●	●	↑	↑	Ⓟ	↑	
															0 A 6 2 7 A 7 3	Decimal Adjust A	●	●	●	●	↑	↑	●
DAA	DECA	1 9 2 1												A - 1 → A	●	●	●	●	↑	↑	●	●	
															4 A 2 1	B - 1 → B	●	●	●	●	↑	↑	●
DEC	DECB													M - 1 → M	●	●	●	●	↑	↑	●	●	
															5 A 2 1	A ⊕ M → A	●	●	●	●	↑	↑	R
EOR	EORA													B ⊕ M → B	●	●	●	●	↑	↑	R	●	
															0 A 6 2 7 A 7 3	RI → R2	●	●	●	●	↑	↑	●
EOR	EORB													A + 1 → A	●	●	●	●	↑	↑	●	●	
															9 8 4 2 B 8 5 3 8 8 2 2 A 8 4 + 2 +	B + 1 → B	●	●	●	●	↑	↑	●
EXG	RI, R2	1 E 8 2												M + 1 → M	●	●	●	●	↑	↑	●	●	
															4 C 2 1	EA ⊕ → PC	●	●	●	●	↑	↑	●
INC	INCA													Jump to Subroutine	●	●	●	●	↑	↑	●	●	
															5 C 2 1		●	●	●	●	↑	↑	●
JMP	INCB														●	●	●	●	↑	↑	●	●	
															0 C 6 2 7 C 7 3		●	●	●	●	↑	↑	●
JSR	INC														●	●	●	●	↑	↑	●	●	
															0 E 3 2 7 E 4 3		●	●	●	●	↑	↑	●
JSR	JMP														●	●	●	●	↑	↑	●	●	
															9 D 7 2 B D 8 3		●	●	●	●	↑	↑	●

2

(Continued)



INSTRUCTION/ FORMS	ACCUM. REG.		DIRECT		EXTND		IMMED		INDEX		RELATIVE		DESCRIPTION	7	6	5	4	3	2	1	0	
	OP	#	OP	#	OP	#	OP	#	OP	#	OP	#		E	F	H	I	N	Z	V	C	
LD	LDA		96	4	2	B6	5	3	86	2	2	A6	4	2					1	1	R	0
	LDB		D6	4	2	F6	5	3	C6	2	2	E6	4	2					1	1	R	0
	LDD		DC	5	2	FC	6	3	CC	3	3	EC	5	2					1	1	R	0
	LDS		10	6	3	10	7	4	10	4	4	106	3	2					1	1	R	0
	LDU		DE			FE			CE			EE										
	LDM		DE	5	2	FE	6	3	CE	3	3	EE	5	2					1	1	R	0
	LDX		9E	5	2	BE	6	3	8E	3	3	AE	5	2					1	1	R	0
	LDY		10	6	3	10	7	4	10	4	4	106	3	2					1	1	R	0
LEA	LEAS		9E			BE			8E			AE										
	LEAU												32	4	2							
	LEAX												33	4	2							
	LEAY												30	4	2							
													31	4	2							
LSL	LSLA		48	2	1																	
	LSLB		58	2	1																	
	LSL					08	6	2	78	7	3											
													68	6	2							
LSR	LSRA		44	2	1																	
	LSRB		54	2	1																	
	LSR					04	6	2	74	7	3											
													64	6	2							
MUL			3D	1	1																	
NEG	NEGA		40	2	1																	
	NEGB		50	2	1																	
	NEG					00	6	2	70	7	3											
													60	6	2							
NOP			12	2	1																	
OR	ORA		9A	4	2	BA	5	3	8A	2	2	AA	4	2								
	ORB		DA	4	2	FA	5	3	CA	2	2	EA	4	2								
	ORCC								1A	3	2											
PSH	PSHS		34	5	2																	
	PSHU		36	5	2																	
PUL	PULS		35	5	2																	
	PULU		37	5	2																	
ROL	ROLA		49	2	1																	
	ROLB		59	2	1																	
	ROL					09	6	2	79	7	3											
													69	6	2							
ROR	RORA		46	2	1																	
	RORB		56	2	1																	
	ROR					06	6	2	76	7	3											
													66	6	2							
RTI			3B	6	15																	
RTS			39	5	1																	
SBC	SBCA		92	4	2	B2	5	3	82	2	2	A2	4	2								
	SBCB		D2	4	2	F2	5	3	C2	2	2	E2	4	2								
SEX			1D	2	1																	

(Continued)



INSTRUCTIONS/ FORMS	ACCUM REG		DIRECT		EXTND		IMMED		INDEX ^①		RELATIVE		DESCRIPTION	7	6	5	4	3	2	1	0	
	OP	#	OP	#	OP	#	OP	#	OP	#	OP	#		E	F	H	I	N	Z	V	C	
	OP	#	OP	#	OP	#	OP	#	OP	#	OP	#										
ST	STA		97	4	2	B7	5	3			A7	4+2-	A→M	●	●	●	●	:	:	R	●	
	STB		D7	4	2	F7	5	3			E7	4+2+	B→M	●	●	●	●	:	:	R	●	
	STD		DD	5	2	FD	6	3			ED	5+2-	D→M:M+1	●	●	●	●	:	:	R	●	
	STS		10	6	3	10	7	4			10	6+3+	S→M:M+1	●	●	●	●	:	:	R	●	
			DF			FF					EF											
	STU		DF	5	2	FF	6	3			EF	5+2-	U→M:M+1	●	●	●	●	:	:	R	●	
	STX		9F	5	2	BF	6	3			AF	5+2+	X→M:M-1	●	●	●	●	:	:	R	●	
	STY		10	6	3	10	7	4			10	6+3+	Y→M:M+1	●	●	●	●	:	:	R	●	
			9F			BF					AF											
SUB	SUBA		90	4	2	B0	5	3	80	2	A0	4+2+	A→M→A	●	●	⊕	●	:	:	:	:	
	SUBB		D0	4	2	F0	5	3	C0	2	E0	4+2+	B→M→B	●	●	⊕	●	:	:	:	:	
	SUBD		93	6	2	B3	7	3	83	4	A3	6+2+	D→M:M+1→D	●	●	●	●	:	:	:	:	
SWI	SWI [ⓐ]	3F	19	1									Software interrupt 1	S	S	S	S	●	●	●	●	
	SWI [ⓑ]	10	20	2									Software interrupt 2	S	●	●	●	●	●	●	●	
		3F																				
	SWI [ⓒ]	11	20	2									Software interrupt 3	S	●	●	●	●	●	●	●	
		3F																				
SYNC		13	2	1									Synchronize to interrupt	●	●	●	●	●	●	●	●	
TFR	R1, R2	1F	6	2									R1 → R2 [ⓓ]	1	—	—	—	—	—	—	1	
TST	TSTA	4D	2	1									Test A	●	●	●	●	:	:	R	●	
	TSTB	5D	2	1									Test B	●	●	●	●	:	:	R	●	
	TST		0D	6	2	7D	7	3			6D	6+2+	Test M	●	●	●	●	:	:	R	●	



(NOTES)

- ① This column gives a base cycle and byte count. To obtain total count, and the values obtained from the INDEXED ADDRESSING MODES table.
- ② R1 and R2 may be any pair of 8 bit or any pair of 16 bit registers.
The 8 bit registers are: A, B, CC, DP
The 16 bit registers are: X, Y, U, S, D, PC
- ③ EA is the effective address.
- ④ The PSH and PUL instructions require 5 cycle plus 1 cycle for each byte pushed or pulled.
- ⑤ 5(6) means: 5 cycles if branch not taken, 6 cycles if taken.
- ⑥ SWI sets 1 and F bits. SW12 and SW13 do not affect I and F.
- ⑦ Conditions Codes set as a direct result of the instruction.
- ⑧ Value of half-carry flag is undefined.
- ⑨ Special Case—Carry set if b7 is SET.
- ⑩ Condition Codes set as a direct result of the instruction if CC is specified, and not affected otherwise.

LEGEND:

- | | | | |
|----|------------------------------|----|---|
| OP | Operation Code (Hexadecimal) | Z | Zero (byte) |
| — | Number of MPU Cycles | V | Overflow, 2's complement |
| # | Number of Program Bytes | C | Carry from bit 7 |
| + | Arithmetic Plus | ↑ | Test and set if true, cleared otherwise |
| - | Arithmetic Minus | ● | Not Affected |
| x | Multiply | CC | Condition Code Register |
| M | Complement of M | : | Concatenation |
| → | Transfer into | v | Logical or |
| H | Half-carry (from bit 3) | ^ | Logical and |
| N | Negative (sign bit) | ⊕ | Logical Exclusive or |



Table 11 Hexadecimal Values of Machine Codes

OP	Mnem	Mode	~	#	OP	Mnem	Mode	~	#	OP	Mnem	Mode	~	#						
00	NEG	Direct	6	2	30	LEAX	Indexed	4+	2+	60	NEG	Indexed	6+	2+						
01	*	↑	6	2	31	LEAY	↑	4+	2+	61	*	↑	6+	2+						
02	*				32	LEAS				62	*									
03	COM				33	LEAU				63	COM									
04	LSR	6	2	34	PSHS	Implied	5+	2	64	LSR	6+	2+								
05	*	↓	6	2	35	PULS	↑	5+	2	65	*	↓	6+	2+						
06	ROR				36	PSHU				66	ROR									
07	ASR				37	PULU				67	ASR									
08	ASL, LSL	6	2	38	*	↓	5+	2	68	ASL, LSL	6+	2+								
09	ROL	39	RTS	69	ROL															
0A	DEC	6	2	3A	ABX				3	1	6A	DEC	6+	2+						
0B	*	↓	6	2	3B	RTI	↓	6, 15	1	6B	*	↓	6+	2+						
0C	INC				3C	CWAI				6C	INC									
0D	TST				3D	MUL				6D	TST									
0E	JMP	3	2	3E	*	↓	11	1	6E	JMP	3+	2+								
0F	CLR	Direct	6	2	3F				SWI	↓	19	1	6F	CLR	Indexed	6+	2+			
10	See	—	—	—	40				NEGA				↑	2	1	70	NEG	↑	7	3
11	Next Page	—	—	—	41	*	2	1	71							*	↑			
12	NOP	Implied	2	1	42	*			2	1	72	*				↑				
13	SYNC	Implied	IN 4	1	43	COMA					2	1	73	COM	↑			7	3	
14	*	IN 4	1	44	LSRA	2	1	74					LSR	↑			7			3
15	*			45	*			75	*											
16	LBRA			Relative	5			3	46	RORA	2	1	76		ROR	7		3		
17	LBSR	Relative	9	3	47	ASRA	2	1	77	ASR	7	3								
18	*	↓	2	1	48	ASLA, LSLA	2	1	78	ASL, LSL	7	3								
19	DAA				Implied	2			1	49	ROLA	2	1	79	ROL	7	3			
1A	ORCC				Immed	3			2	4A	DECA			2	1	7A	DEC	7	3	
1B	*	↓	3	2	4B	*	2	1	7B	*	↓					7	3			
1C	ANDCC				Immed	3			2	4C		INCA	2					1	7C	INC
1D	SEX				Implied	2			1	4D		TSTA		2	1				7D	TST
1E	EXG	↑	8	2	4E	*	↓	2	1	7E	JMP	4				3				
1F	TFR	Implied	6	2	4F	CLRA				↓	2	1	7F			CLR	Extended	7	3	
20	BRA	Relative	3	2	50	NEGB							↑	2	1	80	SUBA	↑	2	2
21	BRN	Relative	3	2	51	*	2	1	81							CMPA	↑			
22	BHI	3	2	52	*	2			1	82	SBCA	↑				2				
23	BLS	3	2	53	COMB					2	1		83	SUBD	↑			4	3	
24	BHS, BCC	3	2	54	LSRB		2	1					84	ANDA			↑			2
25	BLO, BCS	3	2	55	*	2			1			85	BITA	↑		2				
26	BNE	3	2	56	RORB					2	1	86	LDA		↑			2	2	
27	BEQ	3	2	57	ASRB		2	1				87	*				↓			2
28	BVC	3	2	58	ASLB, LSLB	2			1			88	EORA	↓		2				
29	BVS	3	2	59	ROLB					2	1	89	ADCA		↓			2	2	
2A	BPL	3	2	5A	DECB		2	1				8A	ORA				↓			2
2B	BMI	3	2	5B	*	2			1			8B	ADDA	↓		2				
2C	BGE	3	2	5C	INCB					2	1	8C	CMPX		↓			4	3	
2D	BLT	3	2	5D	TSTB		2	1				8D	BSR				↓			7
2E	BGT	3	2	5E	*	↓			2			1	8E	LDX		↓				
2F	BLE	Relative	3	2	5F					CLRB	↓		2	1	8F			*	↓	

LEGEND:
 ~ Number of MPU cycles (less possible push pull or indexed-mode cycles)
 # Number of program bytes
 * Denotes unused opcode

(to be continued)



OP	Mnem	Mode	~	#	OP	Mnem	Mode	~	#	OP	Mnem	Mode	~	#				
90	SUBA	Direct	4	2	C6	LDB	Immed	2	2	FC	LDD	Extended	6	3				
91	CMPA	↑	4	2	C7	*	↑	2	2	FD	STD	↕	6	3				
92	SBCA		4	2	C8	EORB		2	2	FE	LDU		6	3				
93	SUBD		6	2	C9	ADCB		2	2	FF	STU		Extended	6	3			
94	ANDA		4	2	CA	ORB		2	2	2 Bytes Opcode								
95	BITA		4	2	CB	ADDB		2	2									
96	LDA		4	2	CC	LDD		3	3									
97	STA		4	2	CD	*												
98	EORA		4	2	CE	LDU		Immed	3							3		
99	ADCA		4	2	CF	*												
9A	ORA		4	2														
9B	ADDA	4	2	D0	SUBB	Direct	4	2										
9C	CMPX	6	2	D1	CMPB	4	2	1021	LBRN							Relative	5	4
9D	JSR	7	2	D2	SBCB	4	2	1022	LBHI							5(6)	4	
9E	LDX	5	2	D3	ADDD	6	2	1023	LBSL	5(6)	4							
9F	STX	Direct	5	2	D4	ANDB	4	2	1024	LBHS, LBCC	5(6)	4						
		↓			D5	BITB	4	2	1025	LBCS, LBLO	5(6)	4						
A0	SUBA		Indexed	4+	2+	D6	LDB	4	2	1026	LBNE	5(6)	4					
A1	CMPA		4+	2+	D7	STB	4	2	1027	LBEQ	5(6)	4						
A2	SBCA		4+	2+	D8	EORB	4	2	1028	LBVC	5(6)	4						
A3	SUBD		6+	2+	D9	ADCB	4	2	1029	LBVS	5(6)	4						
A4	ANDA		4+	2+	DA	ORB	4	2	102A	LBPL	5(6)	4						
A5	BITA		4+	2+	DB	ADDB	4	2	102B	LBMI	5(6)	4						
A6	LDA		4+	2+	DC	LDD	5	2	102C	LBGE	5(6)	4						
A7	STA		4+	2+	DD	STD	5	2	102D	LBLT	5(6)	4						
A8	EORA		4+	2+	DE	LDU	5	2	102E	LGBT	5(6)	4						
A9	ADCA	4+	2+	DF	STU	Direct	5	2	102F	LBLE	Relative	5(6)	4					
AA	ORA	4+	2+			↓		103F	SWI2	Implied	20	2						
AB	ADDA	4+	2+	E0	SUBB		Indexed	4+	2+	1083	CMPD	Immed	5	4				
AC	CMPX	6+	2+	E1	CMPB		4+	2+	108C	CMPY	Immed	5	4					
AD	JSR	7+	2+	E2	SBCB		4+	2+	108E	LDY	Immed	4	4					
AE	LDX	5+	2+	E3	ADDD		6+	2+	1093	CMPD	Direct	7	3					
AF	STX	Indexed	5+	2+	E4		ANDB	4+	2+	109C	CMPY	Direct	7	3				
		↑			E5		BITB	4+	2+	109E	LDY	Immed	6	3				
B0	SUBA		Extended	5	3		E6	LDB	4+	2+	109F	STY	Direct	6	3			
B1	CMPA		5	3	E7		STB	4+	2+	10A3	CMPD	Indexed	7+	3+				
B2	SBCA		5	3	E8		EORB	4+	2+	10AC	CMPY	Indexed	7+	3+				
B3	SUBD		7	3	E9	ADCB	4+	2+	10AE	LDY	Indexed	6+	3+					
B4	ANDA		5	3	EA	ORB	4+	2+	10AF	STY	Extended	6+	3+					
B5	BITA		5	3	EB	ADDB	4+	2+	10B3	CMPD	Extended	8	4					
B6	LDA		5	3	EC	LDD	5+	2+	10BC	CMPY	Extended	8	4					
B7	STA		5	3	ED	STD	5+	2+	10BE	LDY	Immed	7	4					
B8	EORA		5	3	EE	LDU	5+	2+	10BF	STY	Extended	7	4					
B9	ADCA	5	3	EF	STU	Indexed	5+	2+	10CE	LDS	Immed	4	4					
BA	ORA	5	3			↑		10DE	LDS	Direct	6	3						
BB	ADDA	5	3	F0	SUBB		Extended	5	3	10DF	STS	Direct	6	3				
BC	CMPX	7	3	F1	CMPB		5	3	10EE	LDS	Indexed	6+	3+					
BD	JSR	8	3	F2	SBCB		5	3	10EF	STS	Indexed	6+	3+					
BE	LDX	6	3	F3	ADDD		7	3	10FE	LDS	Extended	7	4					
BF	STX	Extended	6	3	F4		ANDB	5	3	10FF	STS	Extended	7	4				
		↓			F5		BITB	5	3	113F	SWI3	Implied	20	2				
C0	SUBB		Immed	2	2		F6	LDB	5	3	1183	CMPU	Immed	5	4			
C1	CMPB		2	2	F7		STB	5	3	118C	CMPS	Immed	5	4				
C2	SBCB		2	2	F8		EORB	5	3	1193	CMPU	Direct	7	3				
C3	ADDD		4	3	F9	ADCB	5	3	119C	CMPS	Direct	7	3					
C4	ANDB		2	2	FA	ORB	5	3	11A3	CMPU	Indexed	7+	3+					
C5	BITB		Immed	2	2	FB	ADDB	Extended	5	3	11AC	CMPS	Indexed	7+	3+			
			↑						11B3	CMPU	Extended	8	4					
										11BC	CMPS	Extended	8	4				

(NOTE): All unused opcodes are both undefined and illegal



■ NOTE FOR USE

[1] Exceptional Operation of HD6809

(a) Exceptional Operations of DMA/BREQ, BA signals (#1)

HD6809 acknowledges the input signal level of DMA/BREQ at the end of each cycle, then determines whether the next sequence is MPU or DMA. When "Low" level is detected, HD6809 executes DMA

sequence by setting BA, BS to "High" level. However, in the conditions shown below the assertion of BA, BS delays one clock cycle.

< Conditions for the exception >

- (1) DMA/BREQ : "Low" for 6~13 cycles
- (2) DMA/BREQ : "High" for 3 cycles

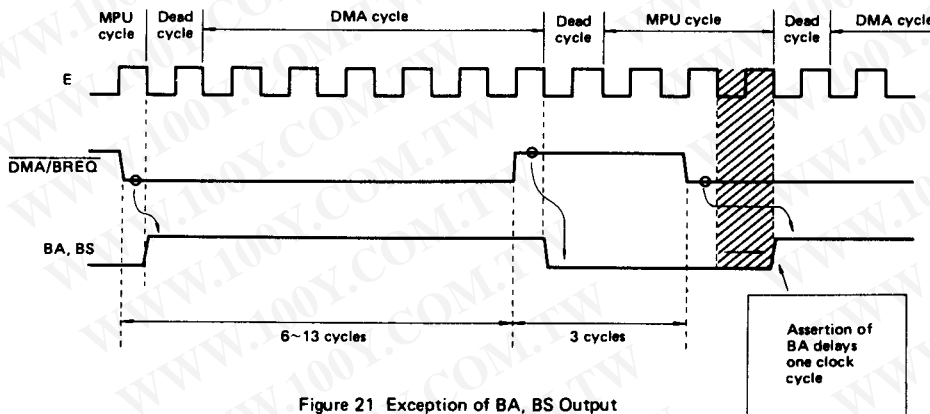


Figure 21 Exception of BA, BS Output

(b) Exceptional Operations of DMA/BREQ, BA signals (#2)

HD6809 includes a self refresh counter for the re-

verse cycle steal. And it is only cleared if DMA/BREQ is inactive ("High") for 3 or more MPU cycles. So 1 or 2 inactive cycle(s) doesn't affect the self refresh counter.

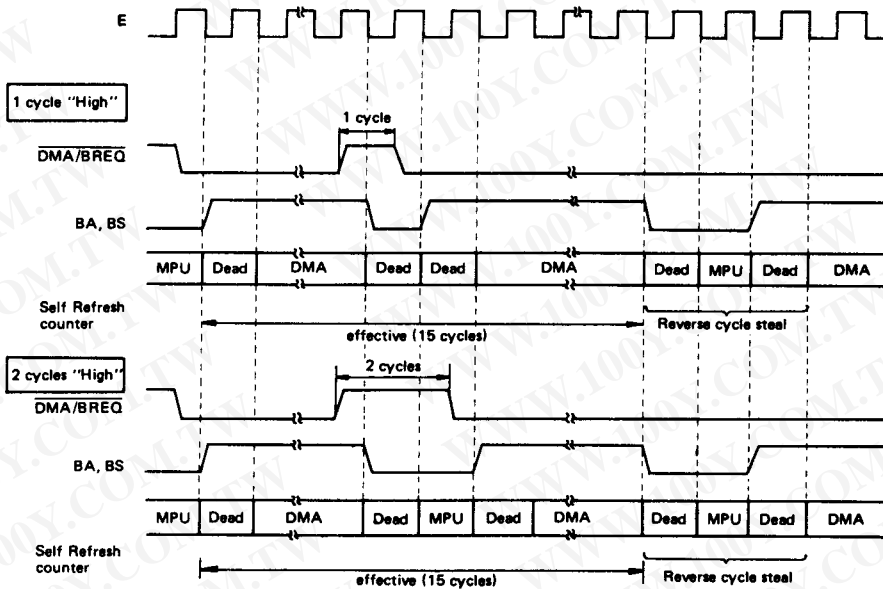


Figure 22 Exception of DMA/BREQ



- (c) **How to avoid these exceptional operations**
It is necessary to provide 4 or more cycles for in-

active DMA/BREQ level as shown in Fig. 23.

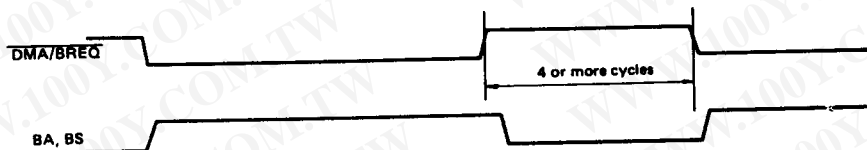


Figure 23 How to Avoid Exceptional Operations

- [2] **Restriction for DMA Transfer**
There is a restriction for the DMA transfer in the HD6809 (MPU), HD6844 (DMAC) system. Please take care of following.

- (a) **An Example of the System Configuration**
This restriction is applied to the following system.
(1) DMA/BREQ is used for DMA request.
(2) "Halt Burst Mode" is used for DMA transfer

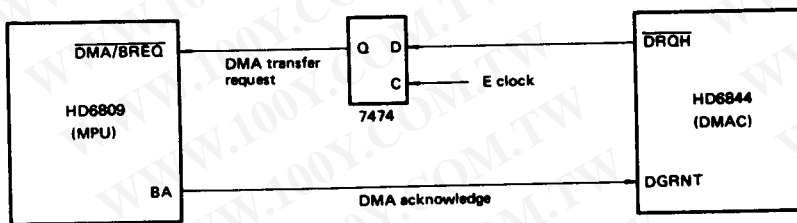


Figure 24 An Example of HD6809, HD6844 System

(The restriction is also applied to the system which doesn't use 7474 Flip-Flop. Fig. 24, Fig. 25 shows an example which uses 7474 for synchronizing DMA request with E.

- (b) **Restriction**
"The number of transfer Byte per one DMA Burst transfer must be less than or equal to 14."

Halt burst DMA transfer should be less than or equal to 14 cycles. In another word, the number stored into DMA Byte count register should be 0~14.

★ Please than care of the section [1](b) if 2 or more DMA channels are used for the DMA transfer.

- (c) **Incorrect operation of HD6809, HD6844 system**
"Incorrect Operation" will occur if the number of DMA transfer Byte is more than 14 bytes. If DMA/BREQ is kept in "Low" level HD6809 performs

reverse cycle steals once in 14 DMA cycles by taking back the bus control. In this case, however, the action taken by MPU is a little bit different from the DMAC.

As shown in Fig. 25, DMA controller can't stop DMA transfer (⊗) by BA falling edge and excutes an extra DMA cycle during HD6809 dead cycle. So MPU cycle is excuted right after DMA cycle, the Bus confliction occurs at the beginning of MPU cycle.

- (d) **How to implement Halt Burst DMA transfer (> 14 cycles)**
Please use HALT input of HD6809 for the DMA request instead of DMA/BREQ.



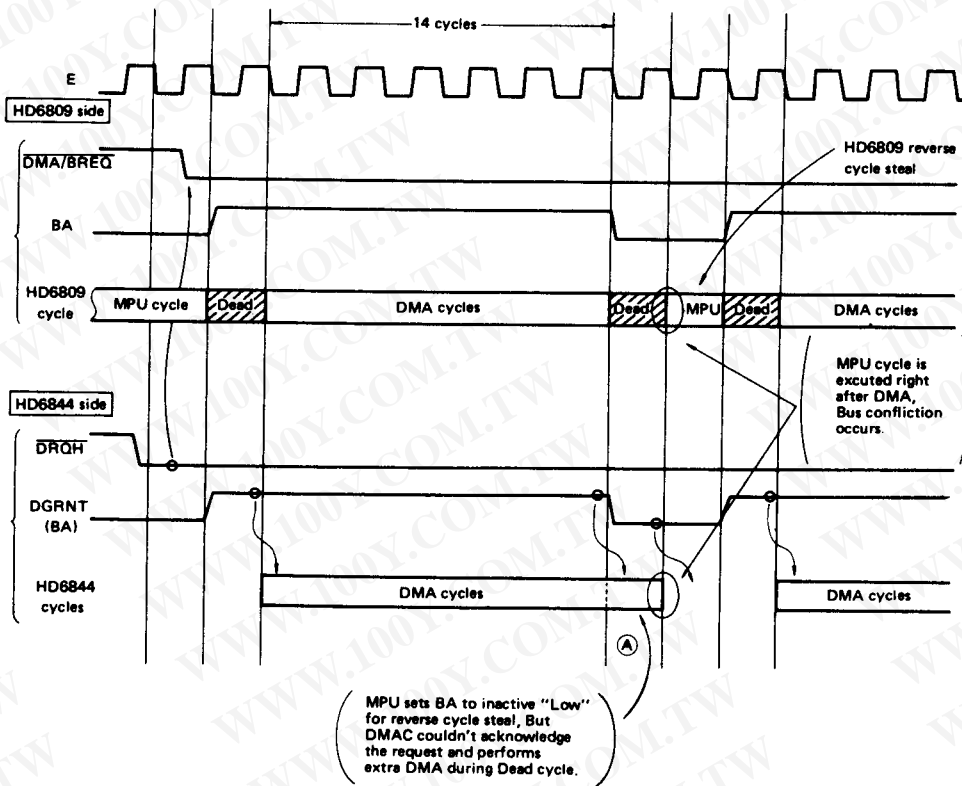


Figure 25 Comparison of HD6809, HD6844 DMA cycles

[3] Note for CLR Instruction

Cycle-by-cycle flow of CLR instruction (Direct, Extended, Indexed Addressing Mode) is shown below. In this sequence the content of the memory location specified by the operand is read before writing "00" into it. Note that status Flags, such as IRQ Flag, will be cleared by this extra data read operation when accessing the control/status register (sharing the same address between read and write) of peripheral devices.

Example: CLR (Extended)

\$8000 CLR \$A000
\$A000 FCB \$80

Cycle #	Address	Data	R/W	Description
1	8000	7F	1	Opcode Fetch
2	8001	A0	1	Operand Address, High Byte
3	8002	00	1	Operand Address, Low Byte
4	FFFF	*	1	VMA Cycle
5	A000	80	1	Read the Data
6	FFFF	*	1	VMA Cycle
7	A000	00	0	Store Fixed "00" into Specified Location

* The data bus has the data at that particular address.

[4] Note for MRDY

HD6809 require synchronization of the MRDY input with the 4f clock. The synchronization necessitates an external oscillator as shown in Figure 26. The negative transition of the

MRDY signal, normally derived from the chip select decoding, must meet the t_{PCS} timing. MRDY's positive transition must occur with the rising edge of 4f.

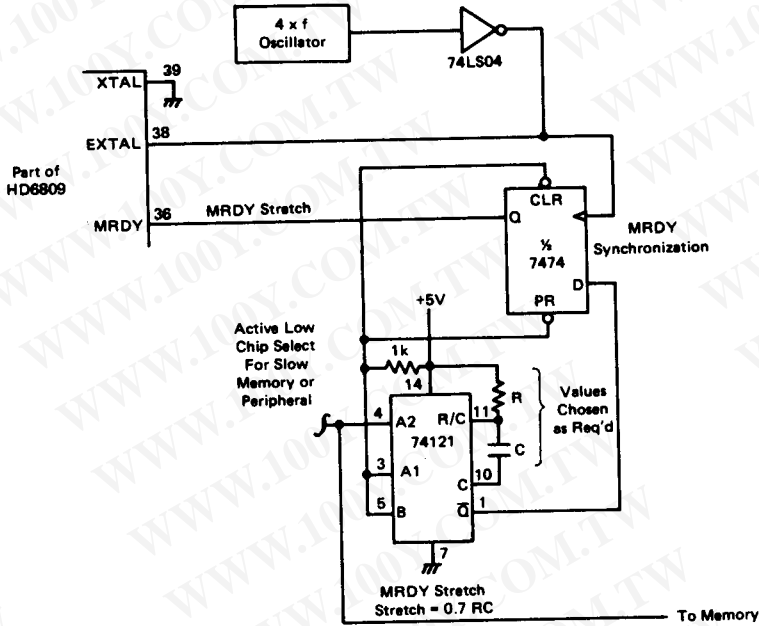


Figure 26 MRDY Synchronization

2

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.