



**Features**

- Advanced Process Technology
- P-Channel MOSFET
- Ultra Low On-Resistance
- Dynamic dv/dt Rating
- Fast Switching
- Fully Avalanche Rated
- Repetitive Avalanche Allowed up to  $T_{jmax}$
- Lead-Free, RoHS Compliant
- Automotive Qualified \*



勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

|              |             |              |
|--------------|-------------|--------------|
| $V_{DSS}$    |             | <b>-100V</b> |
| $R_{DS(on)}$ | <b>max.</b> | <b>60mΩ</b>  |
| $I_D$        |             | <b>-38A</b>  |



|          |          |          |
|----------|----------|----------|
| <b>G</b> | <b>D</b> | <b>S</b> |
| Gate     | Drain    | Source   |

**Description**

Specifically designed for Automotive applications, this cellular design of HEXFET® Power MOSFETs utilizes the latest processing techniques to achieve low on-resistance per silicon area. This benefit combined with the fast switching speed and ruggedized device design that HEXFET power MOSFETs are well known for, provides the designer with an extremely efficient and reliable device for use in Automotive and a wide variety of other applications..

| Base part number | Package Type        | Standard Pack      |          | Orderable Part Number |
|------------------|---------------------|--------------------|----------|-----------------------|
|                  |                     | Form               | Quantity |                       |
| AUIRF5210S       | D <sup>2</sup> -Pak | Tube               | 50       | AUIRF5210S            |
|                  |                     | Tape and Reel Left | 800      | AUIRF5210STRL         |

**Absolute Maximum Ratings**

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only; and functional operation of the device at these or any other condition beyond those indicated in the specifications is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability. The thermal resistance and power dissipation ratings are measured under board mounted and still air conditions. Ambient temperature ( $T_A$ ) is 25°C, unless otherwise specified.

| Symbol                          | Parameter                                               | Max.         | Units |
|---------------------------------|---------------------------------------------------------|--------------|-------|
| $I_D @ T_C = 25^\circ\text{C}$  | Continuous Drain Current, $V_{GS} @ -10\text{V}$        | -38          | A     |
| $I_D @ T_C = 100^\circ\text{C}$ | Continuous Drain Current, $V_{GS} @ -10\text{V}$        | -24          |       |
| $I_{DM}$                        | Pulsed Drain Current ①                                  | -140         |       |
| $P_D @ T_A = 25^\circ\text{C}$  | Maximum Power Dissipation                               | 3.1          | W     |
| $P_D @ T_C = 25^\circ\text{C}$  | Maximum Power Dissipation                               | 170          |       |
|                                 | Linear Derating Factor                                  | 1.3          | W/°C  |
| $V_{GS}$                        | Gate-to-Source Voltage                                  | ± 20         | V     |
| $E_{AS}$                        | Single Pulse Avalanche Energy (Thermally Limited) ②     | 120          | mJ    |
| $I_{AR}$                        | Avalanche Current ①                                     | -23          | A     |
| $E_{AR}$                        | Repetitive Avalanche Energy ①                           | 17           | mJ    |
| dv/dt                           | Peak Diode Recovery dv./dt ③                            | -7.4         | V/ns  |
| $T_J$                           | Operating Junction and                                  | -55 to + 150 | °C    |
| $T_{STG}$                       | Storage Temperature Range                               |              |       |
|                                 | Soldering Temperature, for 10 seconds (1.6mm from case) |              |       |

**Thermal Resistance**

| Symbol          | Parameter                                        | Typ. | Max. | Units |
|-----------------|--------------------------------------------------|------|------|-------|
| $R_{\theta JC}$ | Junction-to-Case ⑥                               | —    | 0.75 | °C/W  |
| $R_{\theta JA}$ | Junction-to-Ambient ( PCB Mount, steady state) ⑤ |      | 40   |       |

HEXFET® is a registered trademark of Infineon.

\*Qualification standards can be found at [www.infineon.com](http://www.infineon.com)

**Static @  $T_J = 25^\circ\text{C}$  (unless otherwise specified)**

|                                 | Parameter                            | Min. | Typ.  | Max. | Units | Conditions                                            |
|---------------------------------|--------------------------------------|------|-------|------|-------|-------------------------------------------------------|
| $V_{(BR)DSS}$                   | Drain-to-Source Breakdown Voltage    | -100 | —     | —    | V     | $V_{GS} = 0V, I_D = -250\mu A$                        |
| $\Delta V_{(BR)DSS}/\Delta T_J$ | Breakdown Voltage Temp. Coefficient  | —    | -0.11 | —    | V/°C  | Reference to $25^\circ\text{C}$ , $I_D = -1mA$        |
| $R_{DS(on)}$                    | Static Drain-to-Source On-Resistance | —    | —     | 60   | mΩ    | $V_{GS} = -10V, I_D = -38A$ ④                         |
| $V_{GS(th)}$                    | Gate Threshold Voltage               | -2.0 | —     | -4.0 | V     | $V_{DS} = V_{GS}, I_D = -250\mu A$                    |
| $g_{fs}$                        | Forward Trans conductance            | 9.5  | —     | —    | S     | $V_{DS} = -50V, I_D = -23A$                           |
| $I_{DSS}$                       | Drain-to-Source Leakage Current      | —    | —     | -50  | μA    | $V_{DS} = -100V, V_{GS} = 0V$                         |
|                                 |                                      | —    | —     | -250 | μA    | $V_{DS} = -80V, V_{GS} = 0V, T_J = 125^\circ\text{C}$ |
| $I_{GSS}$                       | Gate-to-Source Forward Leakage       | —    | —     | -100 | nA    | $V_{GS} = -20V$                                       |
|                                 | Gate-to-Source Reverse Leakage       | —    | —     | 100  | nA    | $V_{GS} = 20V$                                        |

**Dynamic Electrical Characteristics @  $T_J = 25^\circ\text{C}$  (unless otherwise specified)**

|              |                              |   |      |     |    |                                                                    |
|--------------|------------------------------|---|------|-----|----|--------------------------------------------------------------------|
| $Q_g$        | Total Gate Charge            | — | 150  | 230 | nC | $I_D = -23A$                                                       |
| $Q_{gs}$     | Gate-to-Source Charge        | — | 22   | 33  |    | $V_{DS} = -80V$                                                    |
| $Q_{gd}$     | Gate-to-Drain Charge         | — | 81   | 120 |    | $V_{GS} = -10V$ ④                                                  |
| $t_{d(on)}$  | Turn-On Delay Time           | — | 14   | —   | ns | $V_{DD} = -50V$                                                    |
| $t_r$        | Rise Time                    | — | 63   | —   |    | $I_D = -23A$                                                       |
| $t_{d(off)}$ | Turn-Off Delay Time          | — | 72   | —   |    | $R_G = 2.4\Omega$                                                  |
| $t_f$        | Fall Time                    | — | 55   | —   |    | $V_{GS} = -10V$ ④                                                  |
| $L_D$        | Internal Drain Inductance    | — | 4.5  | —   | nH | Between lead, 6mm (0.25in.) from package and center of die contact |
| $L_S$        | Internal Source Inductance   | — | 7.5  | —   |    |                                                                    |
| $C_{iss}$    | Input Capacitance            | — | 2780 | —   | pF | $V_{GS} = 0V$                                                      |
| $C_{oss}$    | Output Capacitance           | — | 800  | —   |    | $V_{DS} = -25V$                                                    |
| $C_{rss}$    | Reverse Transfer Capacitance | — | 430  | —   |    | $f = 1.0MHz$ , See Fig. 5                                          |

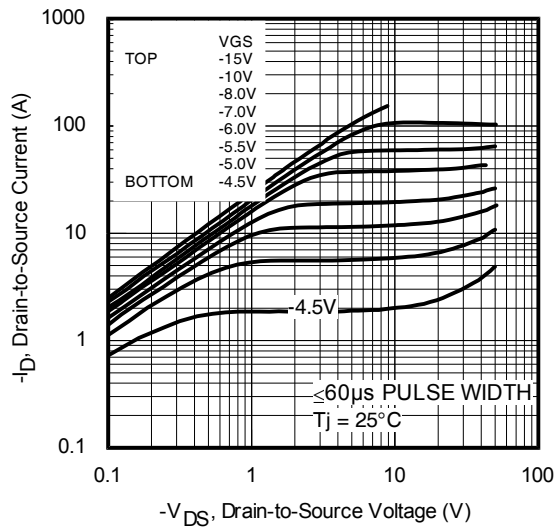
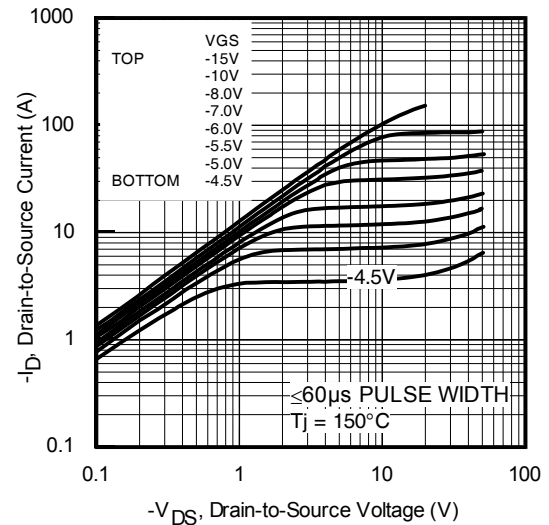
**Diode Characteristics**

|          | Parameter                              | Min.                                                                        | Typ. | Max. | Units | Conditions                                                     |
|----------|----------------------------------------|-----------------------------------------------------------------------------|------|------|-------|----------------------------------------------------------------|
| $I_S$    | Continuous Source Current (Body Diode) | —                                                                           | —    | -38  | A     | MOSFET symbol showing the integral reverse p-n junction diode. |
| $I_{SM}$ | Pulsed Source Current (Body Diode) ①   | —                                                                           | —    | -140 |       |                                                                |
| $V_{SD}$ | Diode Forward Voltage                  | —                                                                           | —    | -1.6 | V     | $T_J = 25^\circ\text{C}, I_S = -23A, V_{GS} = 0V$ ④            |
| $t_{rr}$ | Reverse Recovery Time                  | —                                                                           | 170  | 260  | ns    | $T_J = 25^\circ\text{C}, I_F = -23A, V_{DD} = -25V$            |
| $Q_{rr}$ | Reverse Recovery Charge                | —                                                                           | 1180 | 1770 | nC    | $di/dt = -100A/\mu s$ ④                                        |
| $t_{on}$ | Forward Turn-On Time                   | Intrinsic turn-on time is negligible (turn-on is dominated by $L_S + L_D$ ) |      |      |       |                                                                |

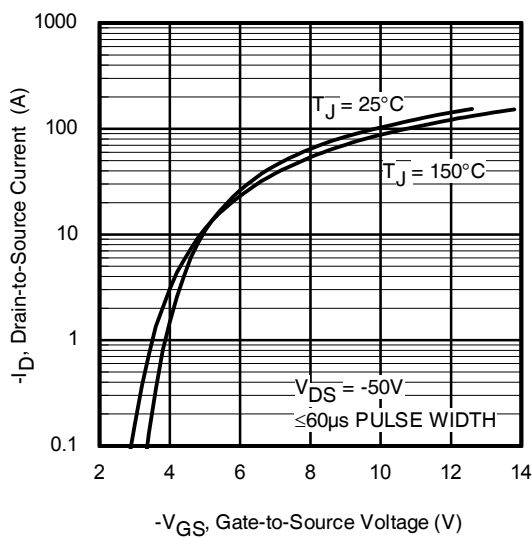
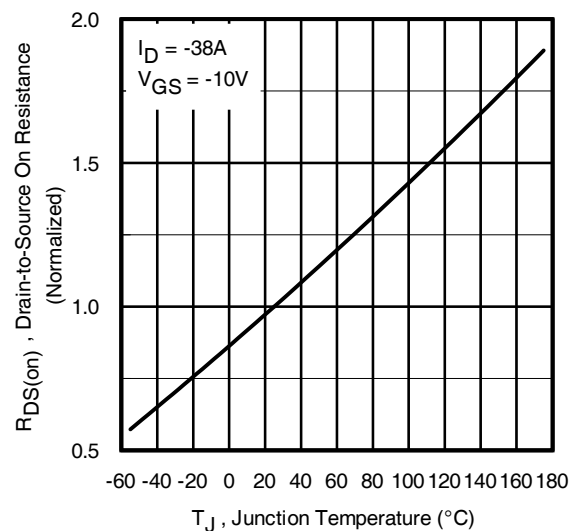
**Notes:**

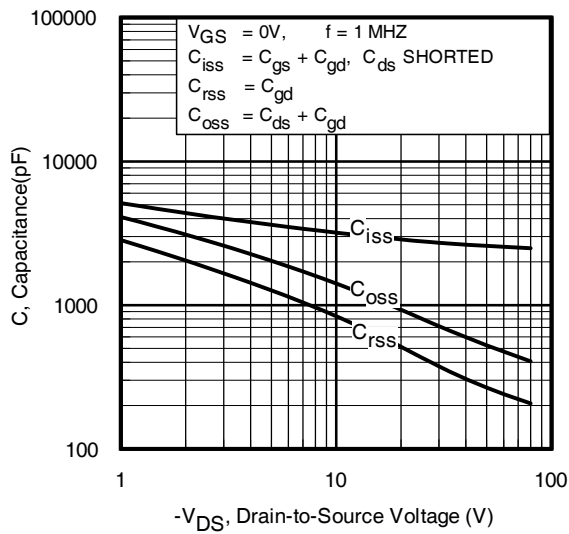
- ① Repetitive rating; pulse width limited by max. junction temperature. (See fig. 11)
- ② Limited by  $T_{Jmax}$ , starting  $T_J = 25^\circ\text{C}$ ,  $L = 0.46mH$ ,  $R_G = 25\Omega$ ,  $I_{AS} = -23A$ . (See Fig.12)
- ③  $I_{SD} \leq -23A$ ,  $di/dt \leq -650A/\mu s$ ,  $V_{DD} \leq V_{(BR)DSS}$ ,  $T_J \leq 150^\circ\text{C}$ .
- ④ Pulse width  $\leq 300\mu s$ ; duty cycle  $\leq 2\%$ .
- ⑤ This is applied to D<sup>2</sup>Pak When mounted on 1" square PCB (FR-4 or G-10 Material). For recommended footprint and soldering techniques refer to application note #AN-994
- ⑥  $R_\theta$  is measured at  $T_J$  of approximately  $90^\circ\text{C}$ .

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

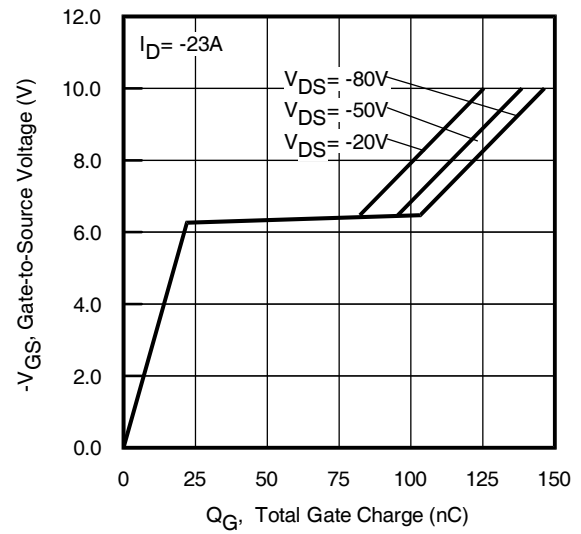

**Fig. 1** Typical Output Characteristics

**Fig. 2** Typical Output Characteristics

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)


**Fig. 3** Typical Transfer Characteristics

**Fig. 4** Normalized On-Resistance vs. Temperature

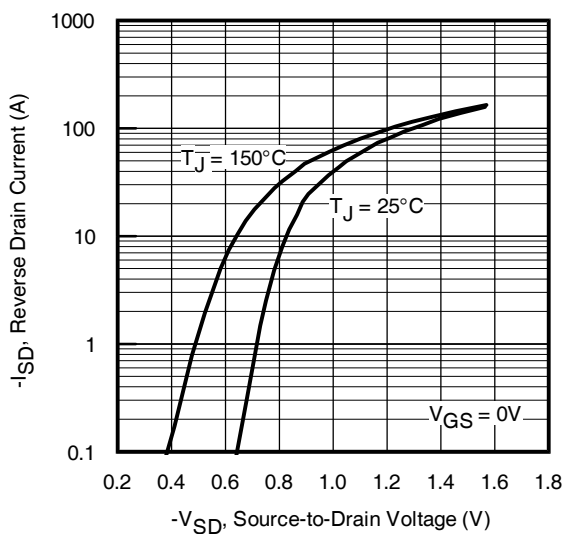


**Fig 5.** Typical Capacitance vs.  
Drain-to-Source Voltage

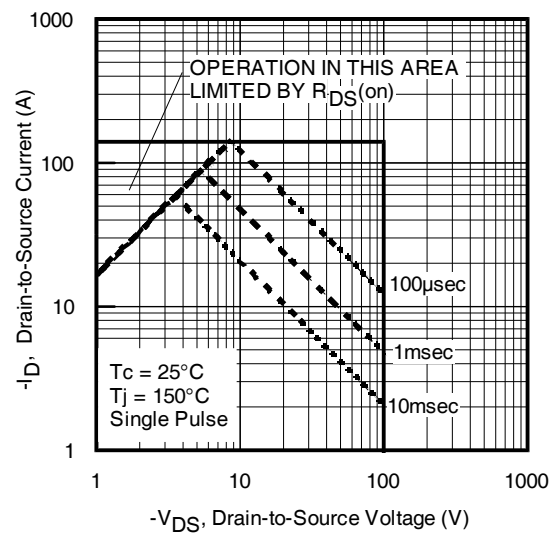


**Fig 6.** Typical Gate Charge vs.  
Gate-to-Source Voltage

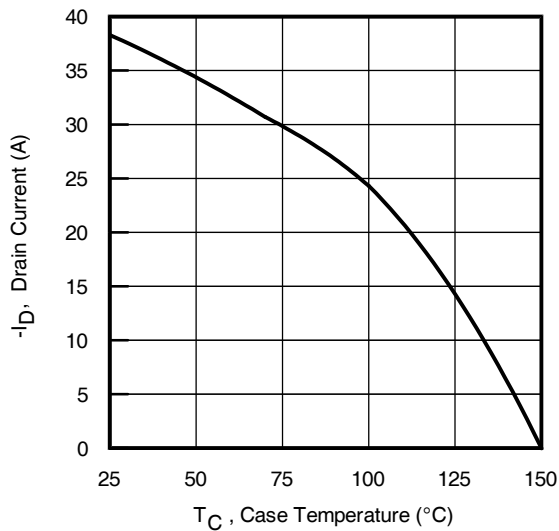
勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)



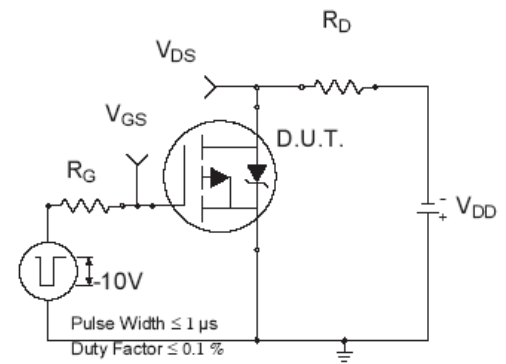
**Fig. 7** Typical Source-to-Drain Diode  
Forward Voltage



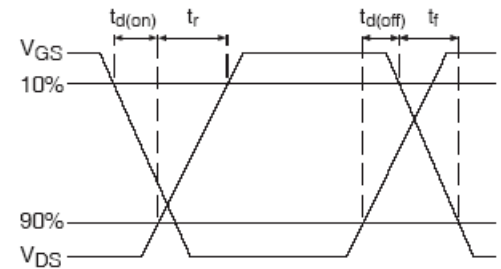
**Fig 8.** Maximum Safe Operating Area



**Fig 9.** Maximum Drain Current vs. Case Temperature

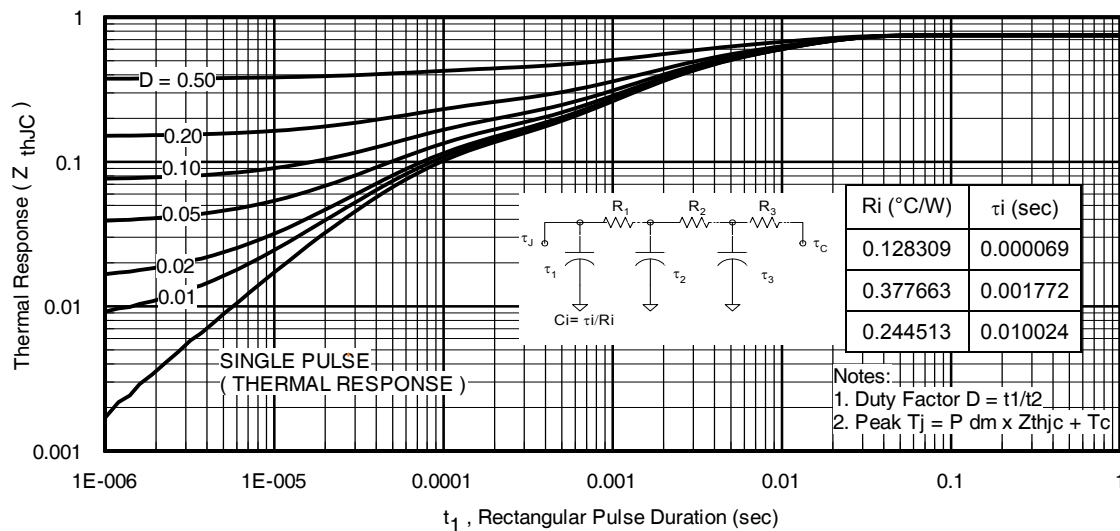


**Fig 10a.** Switching Time Test Circuit

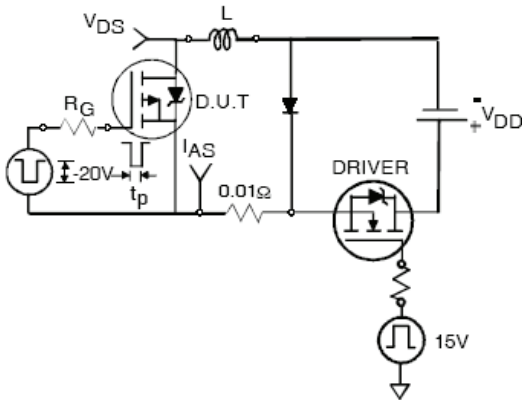
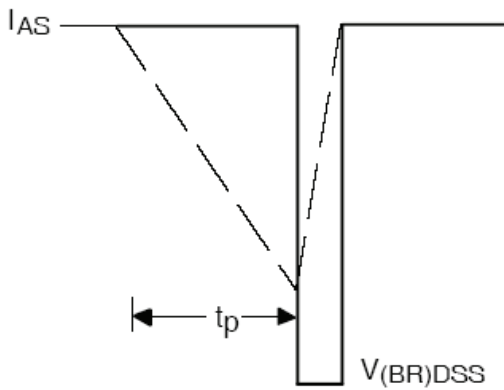
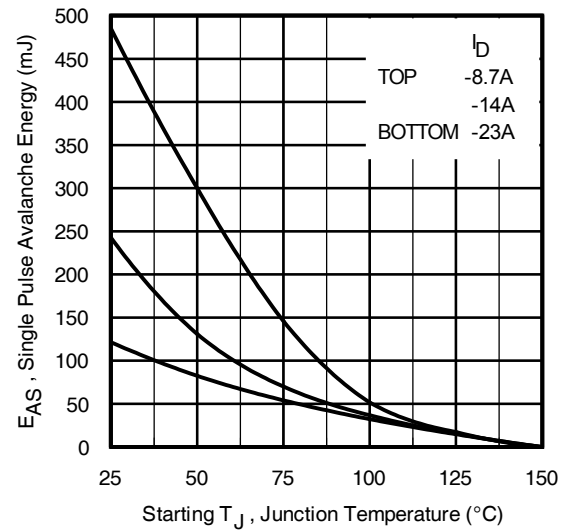


**Fig 10b.** Switching Time Waveforms

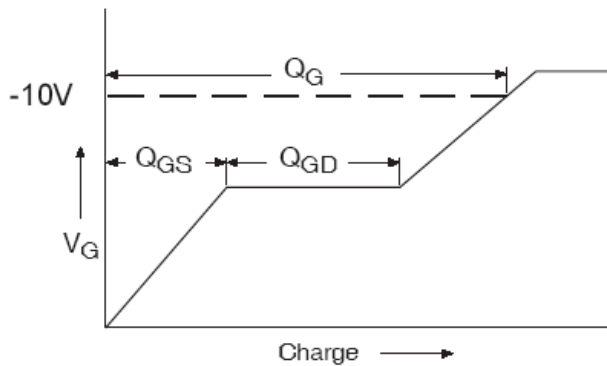
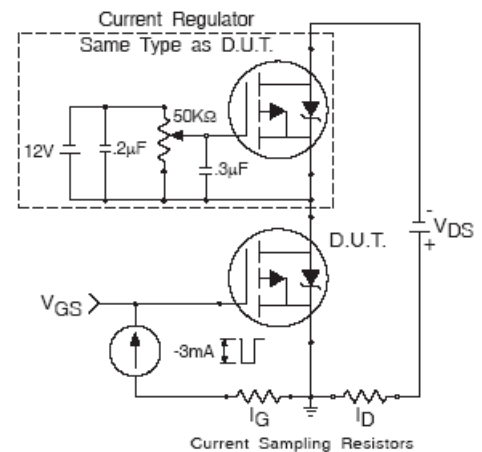
勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

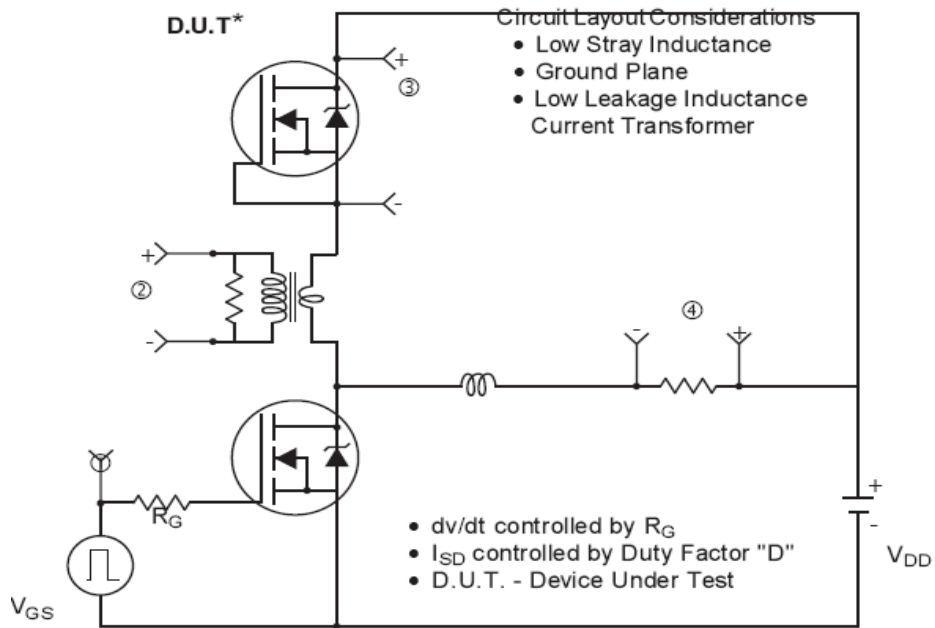


**Fig 11.** Maximum Effective Transient Thermal Impedance, Junction-to-Case

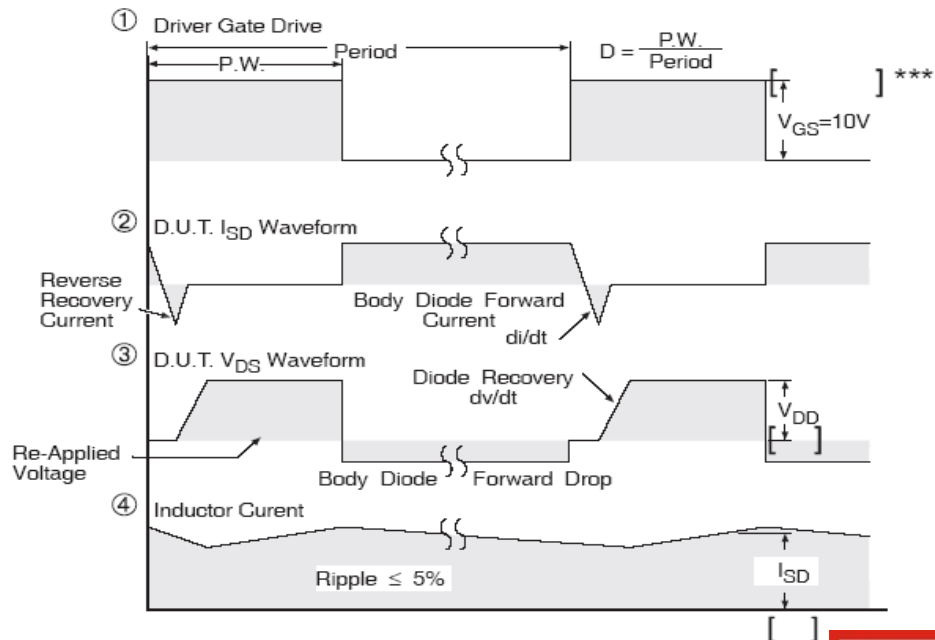

**Fig 12a.** Unclamped Inductive Test Circuit

**Fig 12b.** Unclamped Inductive Waveforms

**Fig 13.** Maximum Avalanche Energy vs. Drain Current

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)


**Fig 14a.** Gate Charge Waveform

**Fig 14b.** Gate Charge Test Circuit



\* Reverse Polarity of D.U.T for P-Channel

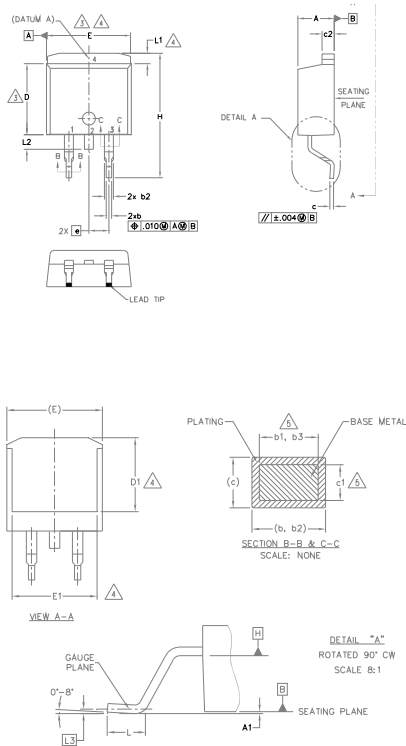


\*\*\*  $V_{GS} = 5.0V$  for Logic Level and 3V Drive Devices

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

Fig 15. Peak Diode Recovery  $dv/dt$  Test Circuit for P-Channel HEXFET® Power MOSFETs

### D<sup>2</sup>Pak (TO-263AB) Package Outline (Dimensions are shown in millimeters (inches))



NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994
2. DIMENSIONS ARE SHOWN IN MILLIMETERS [INCHES].
3. DIMENSION D & E DO NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED 0.127 [.005"] PER SIDE. THESE DIMENSIONS ARE MEASURED AT THE OUTMOST EXTREMES OF THE PLASTIC BODY AT DATUM H.
4. THERMAL PAD CONTOUR OPTIONAL WITHIN DIMENSION E, L1, D1 & E1.
5. DIMENSION b1, b3 AND c1 APPLY TO BASE METAL ONLY.
6. DATUM A & B TO BE DETERMINED AT DATUM PLANE H.
7. CONTROLLING DIMENSION: INCH.
8. OUTLINE CONFORMS TO JEDEC OUTLINE TO-263AB.

| SYMBOL | DIMENSIONS  |       |          |      | NOTES |
|--------|-------------|-------|----------|------|-------|
|        | MILLIMETERS |       | INCHES   |      |       |
|        | MIN.        | MAX.  | MIN.     | MAX. |       |
| A      | 4.06        | 4.83  | .160     | .190 | 5     |
| A1     | 0.00        | 0.254 | .000     | .010 |       |
| b      | 0.51        | 0.99  | .020     | .039 |       |
| b1     | 0.51        | 0.89  | .020     | .035 |       |
| b2     | 1.14        | 1.78  | .045     | .070 |       |
| b3     | 1.14        | 1.73  | .045     | .068 | 5     |
| c      | 0.38        | 0.74  | .015     | .029 | 5     |
| c1     | 0.38        | 0.58  | .015     | .023 |       |
| c2     | 1.14        | 1.65  | .045     | .065 |       |
| D      | 8.38        | 9.65  | .330     | .380 | 3     |
| D1     | 6.86        | —     | .270     | —    | 4     |
| E      | 9.65        | 10.67 | .380     | .420 | 3,4   |
| E1     | 6.22        | —     | .245     | —    | 4     |
| e      | 2.54 BSC    |       | .100 BSC |      | 4     |
| H      | 14.61       | 15.88 | .575     | .625 |       |
| L      | 1.78        | 2.79  | .070     | .110 |       |
| L1     | —           | 1.68  | —        | .066 |       |
| L2     | —           | 1.78  | —        | .070 |       |
| L3     | 0.25 BSC    |       | .010 BSC |      |       |

### LEAD ASSIGNMENTS

## DIODES

- 1.- ANODE (TWO DIE) / OPEN (ONE DIE)
- 2, 4.- CATHODE
- 3.- ANODE

## HEXFET

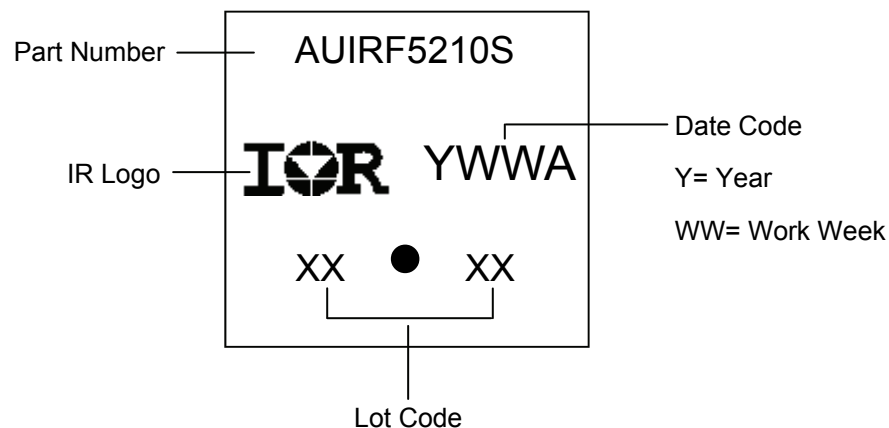
- |              |                  |
|--------------|------------------|
| 1.- GATE     | 1.- GATE         |
| 2, 4.- DRAIN | 2, 4.- COLLECTOR |
| 3.- SOURCE   | 3.- EMITTER      |

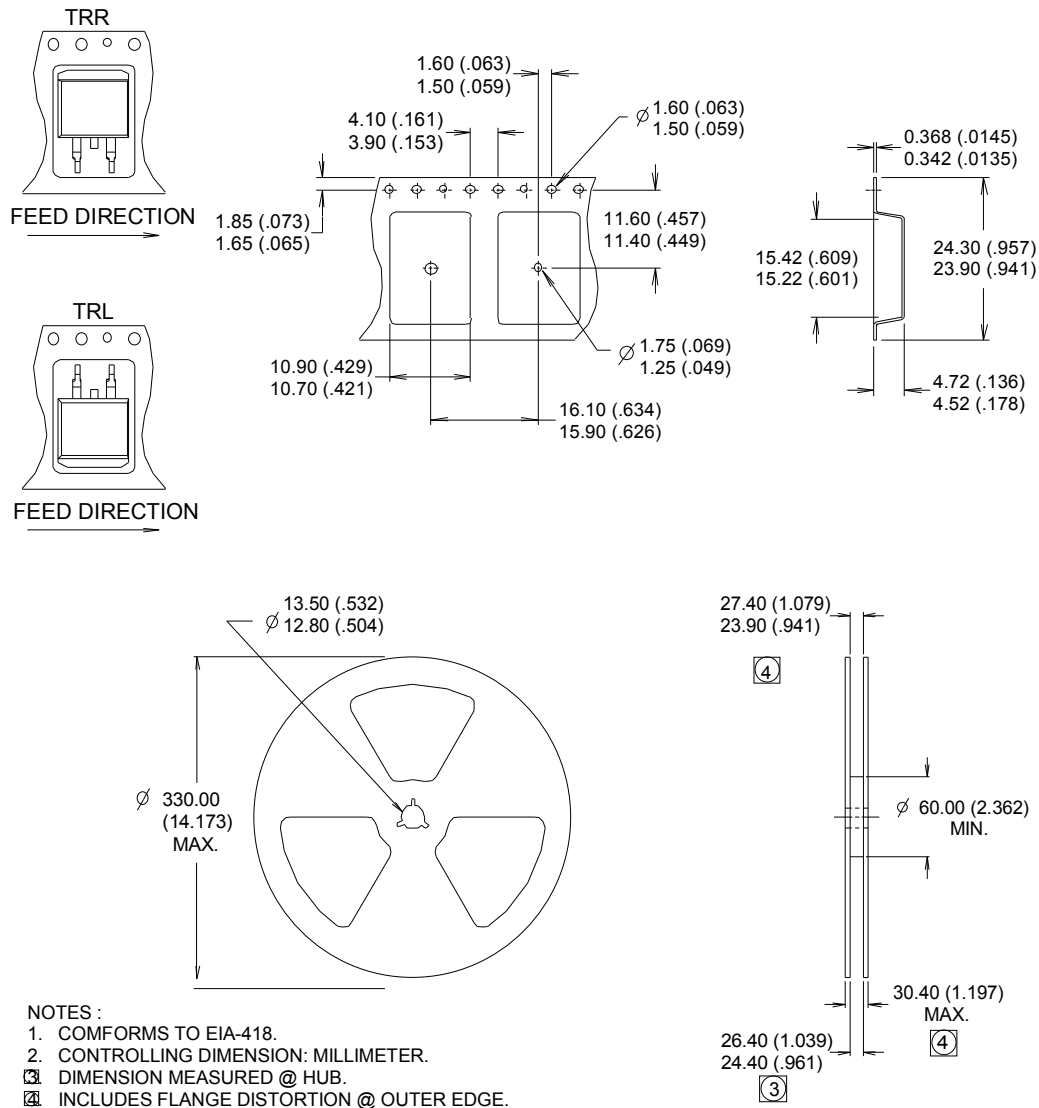
## IGBTs, CoPACK

- 1.- GATE
- 2, 4.- COLLECTOR
- 3.- EMITTER

## D<sup>2</sup>Pak (TO-263AB) Part Marking Information

勝特力材料 886-3-5753170  
勝特力電子(上海) 86-21-34970699  
勝特力電子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)



**D<sup>2</sup>Pak (TO-263AB) Tape & Reel Information (Dimensions are shown in millimeters (inches))**


勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

**Qualification Information**

|                                   |                      |                                                                                                                                                                               |      |
|-----------------------------------|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|
| <b>Qualification Level</b>        |                      | Automotive<br>(per AEC-Q101)                                                                                                                                                  |      |
|                                   |                      | Comments: This part number(s) passed Automotive qualification. Infineon's Industrial and Consumer qualification level is granted by extension of the higher Automotive level. |      |
| <b>Moisture Sensitivity Level</b> |                      | D <sup>2</sup> -Pak                                                                                                                                                           | MSL1 |
| <b>ESD</b>                        | Machine Model        | Class M4 (+/-425V) <sup>†</sup><br>AEC-Q101-002                                                                                                                               |      |
|                                   | Human Body Model     | Class H2 (/4000V) <sup>†</sup><br>AEC-Q101-001                                                                                                                                |      |
|                                   | Charged Device Model | Class C5 (/1125V) <sup>†</sup><br>AEC-Q101-005                                                                                                                                |      |
| <b>RoHS Compliant</b>             |                      | Yes                                                                                                                                                                           |      |

† Highest passing voltage.

**Revision History**

| Date       | Comments                                                                                                                                 |
|------------|------------------------------------------------------------------------------------------------------------------------------------------|
| 9/30/2015  | <ul style="list-style-type: none"> <li>Updated datasheet with corporate template</li> <li>Corrected ordering table on page 1.</li> </ul> |
| 10/15/2019 | <ul style="list-style-type: none"> <li>Correted typo on part marking from "AU5210S" to "AUIRF5210S" page 8.</li> </ul>                   |

**Published by**  
**Infineon Technologies AG**  
**81726 München, Germany**  
 © Infineon Technologies AG 2015  
 All Rights Reserved.

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

**IMPORTANT NOTICE**

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenhheitsgarantie"). With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on the product, technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies office ([www.infineon.com](http://www.infineon.com)).

**WARNINGS**

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Infineon:](#)

[AU1RF5210S](#) [AU1RF5210STR](#)

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)