

Absolute maximum ratings

($T_a=25^\circ\text{C}$)


Symbol	Ratings	Unit
V_{DSS}	60	V
V_{GSS}	± 20	V
I_D	5	A
I_D (pulse)	8 ($PW \leq 1\text{ms}, D \leq 25\%$)	A
P_T	5 ($T_a=25^\circ\text{C}$, with all circuits operating, without heatsink)	W
	30 ($T_c=25^\circ\text{C}$, with all circuits operating, with infinite heatsink)	
θ_{j-a}	25 (Junction-Air, $T_a=25^\circ\text{C}$, with all circuits operating)	$^\circ\text{C/W}$
θ_{j-c}	4.17 (Junction-Case, $T_c=25^\circ\text{C}$, with all circuits operating)	$^\circ\text{C/W}$
V_{ISO}	1000 (Between fin and lead pin, AC)	Vrms
T_{ch}	150	$^\circ\text{C}$
T_{stg}	-40 to +150	$^\circ\text{C}$

Electrical characteristics

($T_a=25^\circ\text{C}$)

Symbol	Specification			Unit	Conditions
	min	typ	max		
$V_{(BR)DSS}$	60			V	$I_D=100\mu\text{A}, V_{GS}=0\text{V}$
I_{GSS}			± 100	nA	$V_{GS}=\pm 20\text{V}$
I_{DSS}			100	μA	$V_{DS}=60\text{V}, V_{GS}=0\text{V}$
V_{TH}	1.0		2.0	V	$V_{DS}=10\text{V}, I_D=250\mu\text{A}$
$R_{e(yfs)}$		5.5		S	$V_{DS}=10\text{V}, I_D=3\text{A}$
$R_{DS(ON)}$			0.3	Ω	$V_{GS}=4\text{V}, I_D=3\text{A}$
C_{iss}		320		pF	$V_{DS}=10\text{V},$ $f=1.0\text{MHz},$ $V_{GS}=0\text{V}$
C_{oss}		160		pF	
C_{rss}		35		pF	
$t_{d(on)}$		16		ns	$I_D=3\text{A},$ $V_{DD} \approx 20\text{V},$ $R_L=6.67\Omega, V_{GS}=5\text{V},$ see Fig. 3 on page 16.
t_r		65		ns	
$t_{d(off)}$		70		ns	
t_f		45		ns	
V_{SD}		1.2		V	
t_{rr}		65		ns	$I_{SD}=4\text{A}, V_{GS}=0\text{V}$
					$I_{SD}=3\text{A}, V_{GS}=0\text{V}, di/dt=100\text{A}/\mu\text{s}$


Equivalent circuit diagram

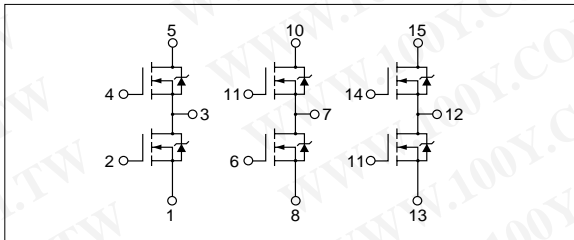


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Characteristic curves


I_D - V_{DS} Characteristics (Typical)




I_D - V_{GS} Characteristics (Typical)




$R_{DS(ON)}$ - I_D Characteristics (Typical)




$R_{e(yfs)}$ - I_D Characteristics (Typical)




$R_{DS(ON)}$ - T_c Characteristics (Typical)




Capacitance- V_{DS} Characteristics (Typical)



I_{DR} - V_{SD} Characteristics (Typical)



Safe Operating Area (SOA)



P_T - T_a Characteristics

