

# HD74HC564, HD74HC574

## Octal D-type Flip-Flops (with 3-state outputs)

REJ03D0630-0200  
 (Previous ADE-205-510)  
 Rev.2.00  
 Mar 30, 2006

### Description

These devices are positive edge triggered flip-flops. The difference between HD74HC564 and HD74HC574 is only that the former has inverting outputs and the latter has noninverting outputs.

Data at the D inputs, meeting the set-up and hold time requirements, are transferred to the Q or  $\bar{Q}$  outputs on positive going transitions of the clock (CK) input. When a high logic level is applied to the output control (OC) input, all outputs go to a high impedance state, regardless of what signals are present at the other inputs and the state of the storage elements.

### Features

- High Speed Operation:  $t_{pd}$  (Clock to Output) = 13 ns typ ( $C_L = 50$  pF)
- High Output Current: Fanout of 15 LSTTL Loads
- Wide Operating Voltage:  $V_{CC} = 2$  to 6 V
- Low Input Current: 1  $\mu$ A max
- Low Quiescent Supply Current:  $I_{CC}$  (static) = 4  $\mu$ A max ( $T_a = 25^\circ\text{C}$ )
- Ordering Information

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

| Part Name                      | Package Type       | Package Code (Previous Code) | Package Abbreviation | Taping Abbreviation (Quantity) |
|--------------------------------|--------------------|------------------------------|----------------------|--------------------------------|
| HD74HC564P<br>HD74HC574P       | DILP-20 pin        | PRDP0020AC-B<br>(DP-20NEV)   | P                    | —                              |
| HD74HC564FPEL<br>HD74HC574FPEL | SOP-20 pin (JEITA) | PRSP0020DD-B<br>(FP-20DAV)   | FP                   | EL (2,000 pcs/reel)            |
| HD74HC564RPEL                  | SOP-20 pin (JEDEC) | PRSP0020DC-A<br>(FP-20DBV)   | RP                   | EL (1,000 pcs/reel)            |

Note: Please consult the sales office for the above package availability.

### Function Table

| Output Control | Inputs |      | Outputs   |           |
|----------------|--------|------|-----------|-----------|
|                | Clock  | Data | HD74HC564 | HD74HC574 |
| L              |        | H    | L         | H         |
| L              |        | L    | H         | L         |
| L              | L      | X    | $Q_0$     | $Q_0$     |
| H              | X      | X    | Z         | Z         |


$Q_0$  : level of Q before the indicated Steady-state input conditions were established.

$\bar{Q}_0$  : complement of  $Q_0$  or level of  $\bar{Q}$  before the indicated Steady-state input Conditions were established.


Pin Arrangement

HD74HC564

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

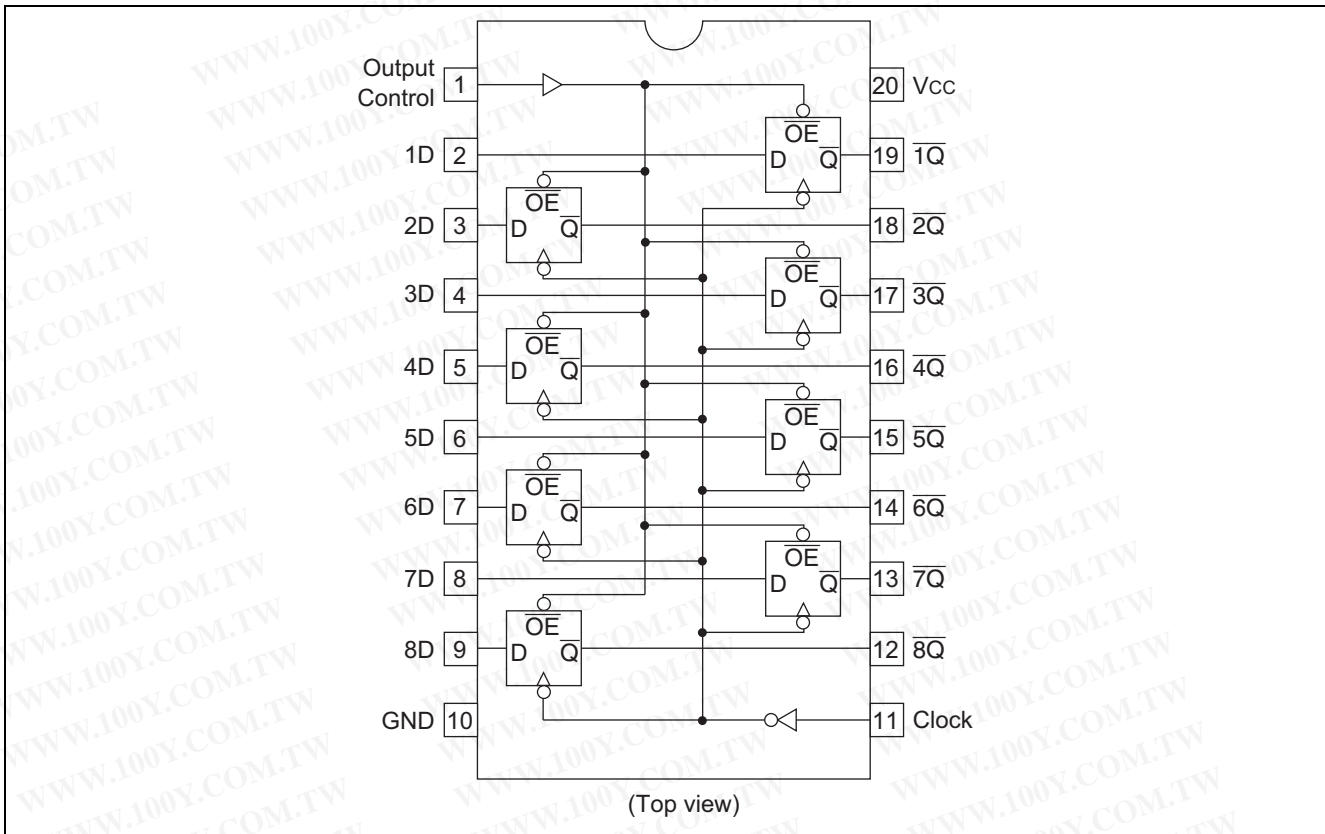


HD74HC574

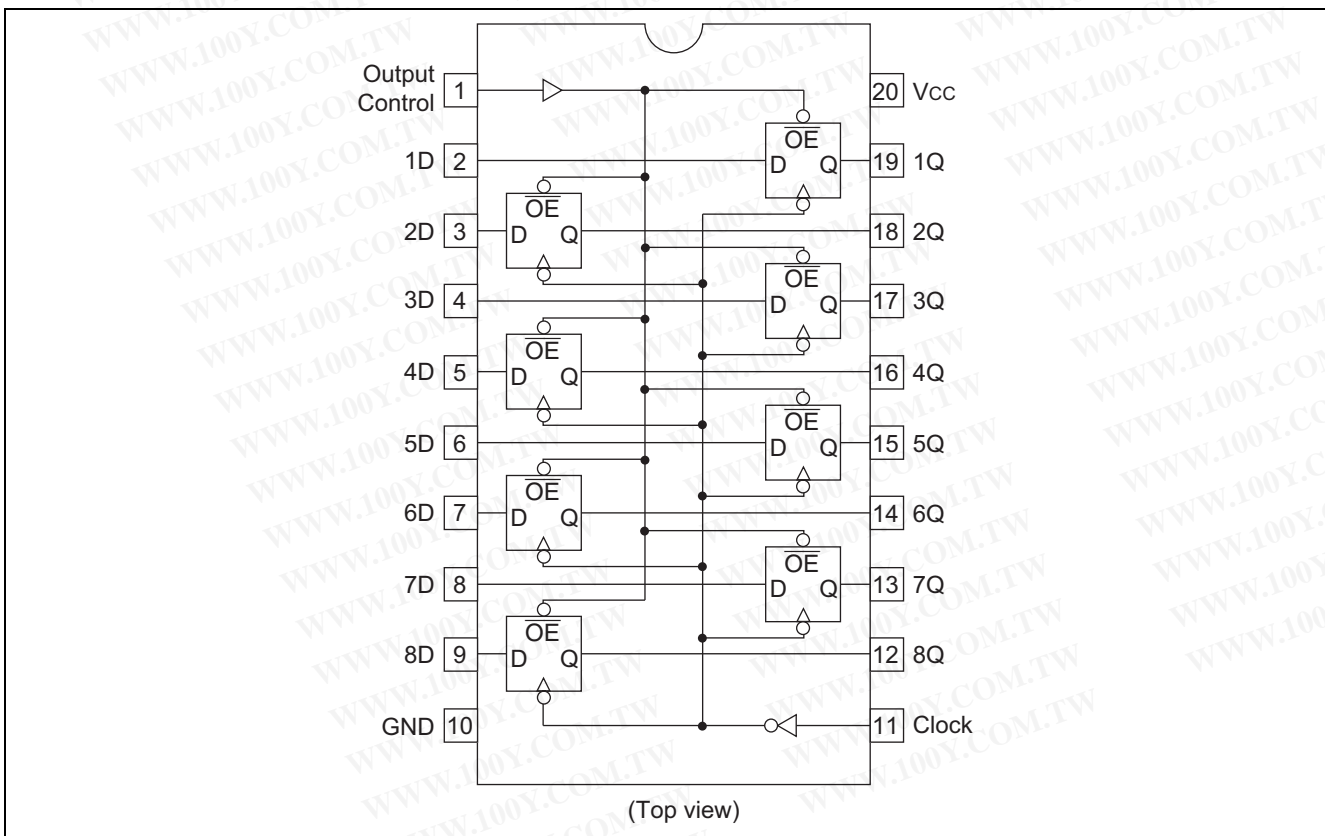


Logic Diagram

HD74HC564

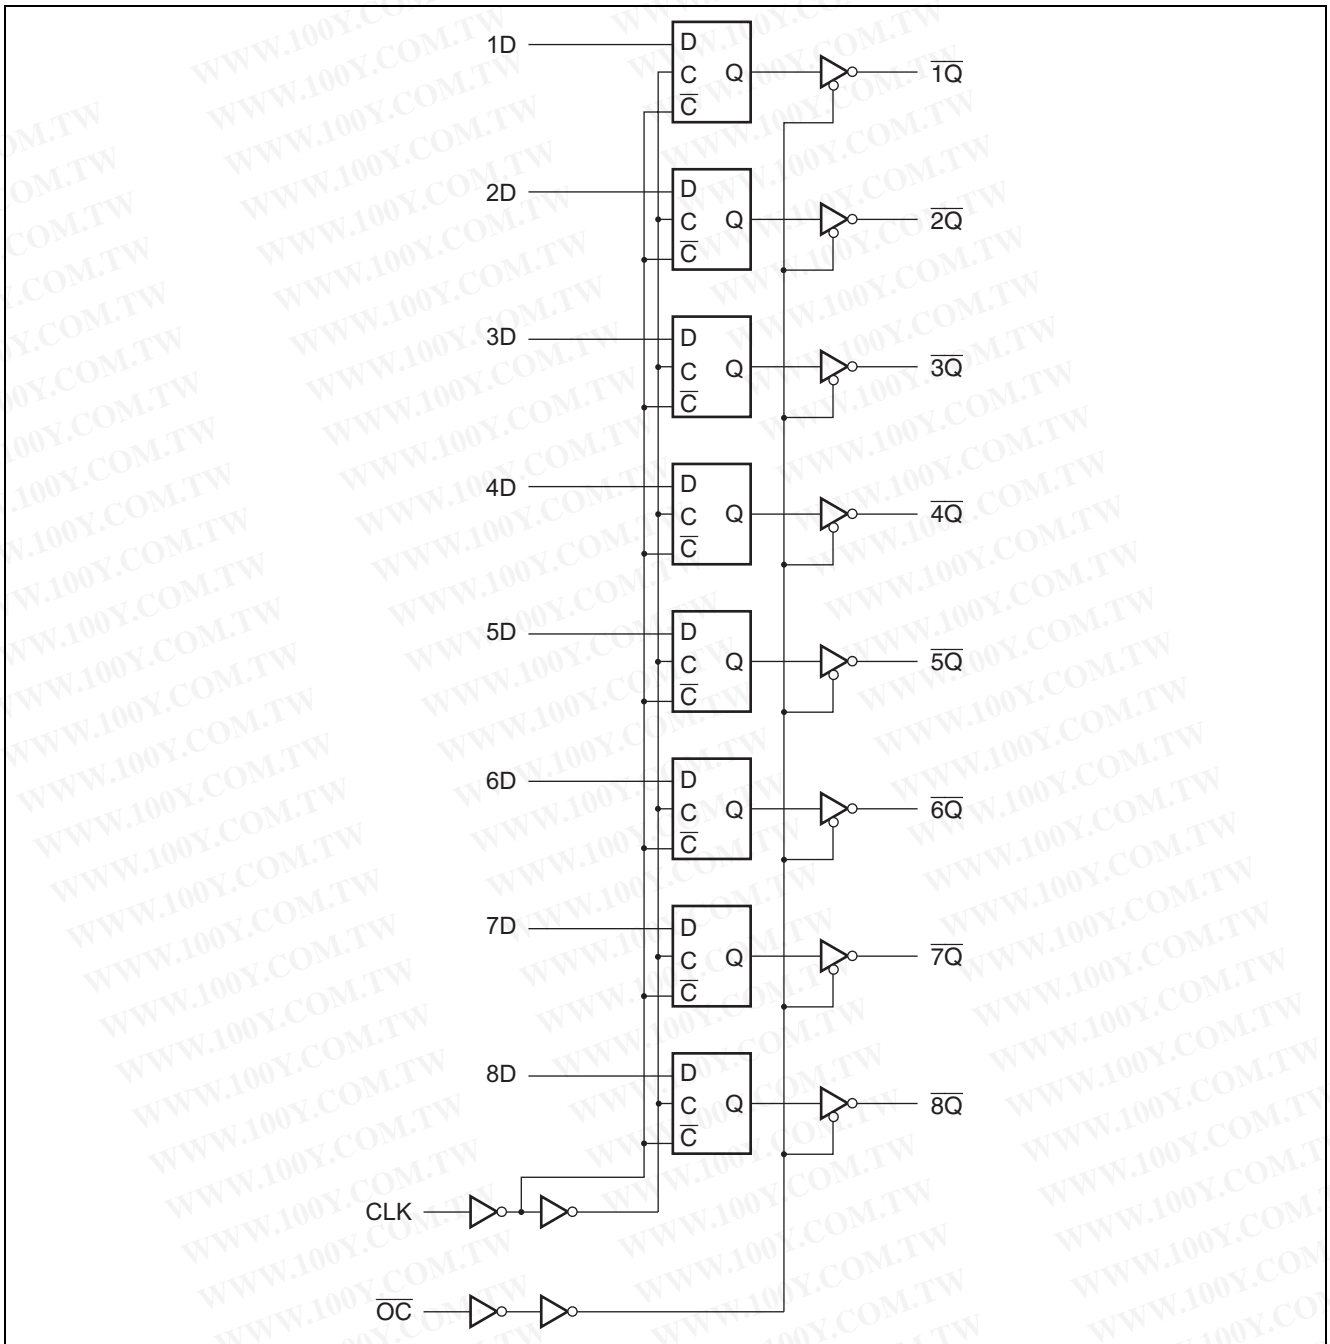

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

HD74HC574

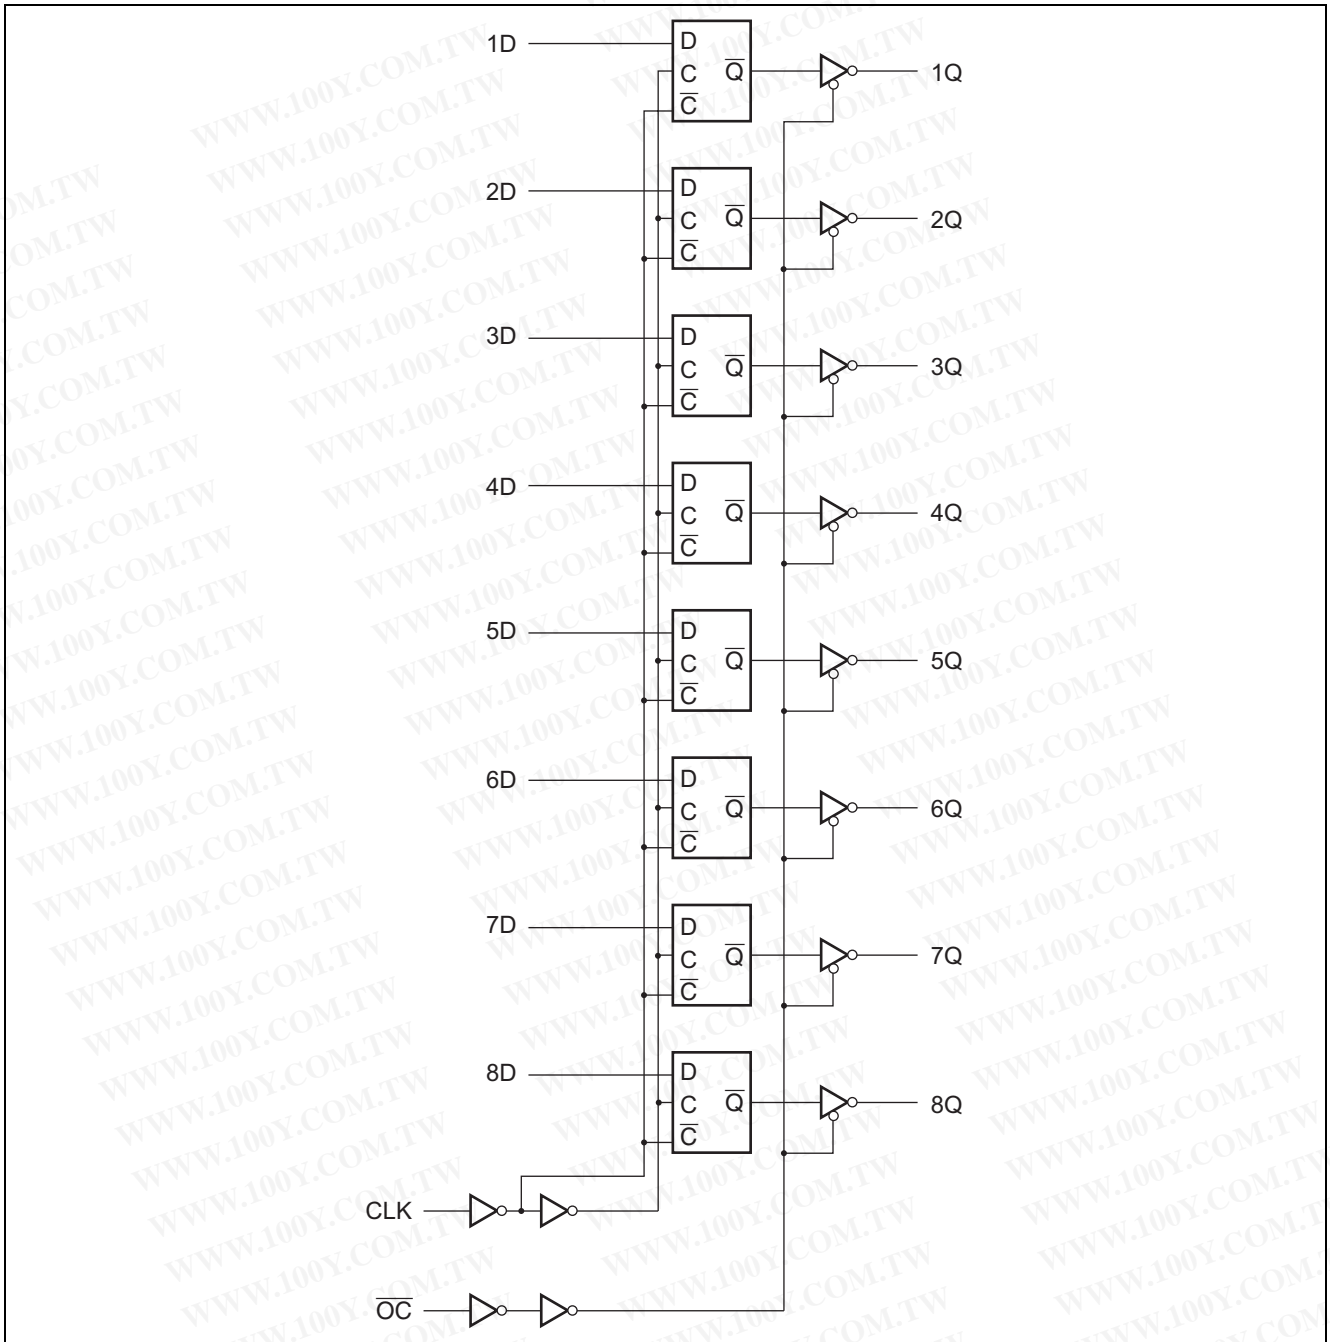

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

### Absolute Maximum Ratings

| Item                         | Symbol                | Ratings                | Unit |
|------------------------------|-----------------------|------------------------|------|
| Supply voltage range         | $V_{CC}$              | -0.5 to 7.0            | V    |
| Input / Output voltage       | $V_{IN}, V_{OUT}$     | -0.5 to $V_{CC} + 0.5$ | V    |
| Input / Output diode current | $I_{IK}, I_{OK}$      | $\pm 20$               | mA   |
| Output current               | $I_O$                 | $\pm 35$               | mA   |
| $V_{CC}$ , GND current       | $I_{CC}$ or $I_{GND}$ | $\pm 75$               | mA   |
| Power dissipation            | $P_T$                 | 500                    | mW   |
| Storage temperature          | $T_{stg}$             | -65 to +150            | °C   |

Note: The absolute maximum ratings are values, which must not individually be exceeded, and furthermore, no two of which may be realized at the same time.

### Recommended Operating Conditions

| Item                                 | Symbol            | Ratings       | Unit | Conditions       |
|--------------------------------------|-------------------|---------------|------|------------------|
| Supply voltage                       | $V_{CC}$          | 2 to 6        | V    |                  |
| Input / Output voltage               | $V_{IN}, V_{OUT}$ | 0 to $V_{CC}$ | V    |                  |
| Operating temperature                | $T_a$             | -40 to 85     | °C   |                  |
| Input rise / fall time <sup>*1</sup> | $t_r, t_f$        | 0 to 1000     | ns   | $V_{CC} = 2.0$ V |
|                                      |                   | 0 to 500      |      | $V_{CC} = 4.5$ V |
|                                      |                   | 0 to 400      |      | $V_{CC} = 6.0$ V |

Note: 1. This item guarantees maximum limit when one input switches.  
Waveform: Refer to test circuit of switching characteristics.

### Electrical Characteristics


| Item                     | Symbol   | $V_{CC}$ (V) | $T_a = 25^\circ\text{C}$ |     |           | $T_a = -40 \text{ to } +85^\circ\text{C}$ |           | Unit          | Test Conditions  |                              |                   |
|--------------------------|----------|--------------|--------------------------|-----|-----------|---|-----------|---------------|--|------------------------------|-------------------|
|                          |          |              | Min                      | Typ | Max       | Min                                       | Max       |               |  |                              |                   |
| Input voltage            | $V_{IH}$ | 2.0          | 1.5                      | —   | —         | 1.5                                       | —         | V             |  |                              |                   |
|                          |          | 4.5          | 3.15                     | —   | —         | 3.15                                      | —         |               |  |                              |                   |
|                          |          | 6.0          | 4.2                      | —   | —         | 4.2                                       | —         |               |  |                              |                   |
|                          | $V_{IL}$ | 2.0          | —                        | —   | 0.5       | —   | 0.5       | V             |  |                              |                   |
|                          |          | 4.5          | —                        | —   | 1.35      | —   | 1.35      |               |  |                              |                   |
|                          |          | 6.0          | —                        | —   | 1.8       | —   | 1.8       |               |  |                              |                   |
| Output voltage           | $V_{OH}$ | 2.0          | 1.9                      | 2.0 | —         | 1.9                                       | —         | V             | $V_{in} = V_{IH}$ or $V_{IL}$                                | $I_{OH} = -20$ $\mu\text{A}$ |                   |
|                          |          | 4.5          | 4.4                      | 4.5 | —         | 4.4                                       | —         |               |  | $I_{OH} = -6$ mA             |                   |
|                          |          | 6.0          | 5.9                      | 6.0 | —         | 5.9                                       | —         |               |  | $I_{OH} = -7.8$ mA           |                   |
|                          |          | 4.5          | 4.18                     | —   | —         | 4.13                                      | —         |               |  |                              |                   |
|                          |          | 6.0          | 5.68                     | —   | —         | 5.63                                      | —         |               |  |                              |                   |
|                          | $V_{OL}$ | 2.0          | —                        | 0.0 | 0.1       | —   | 0.1       | V             | $V_{in} = V_{IH}$ or $V_{IL}$                                | $I_{OL} = 20$ $\mu\text{A}$  |                   |
|                          |          | 4.5          | —                        | 0.0 | 0.1       | —   | 0.1       |               |  |                              |                   |
|                          |          | 6.0          | —                        | 0.0 | 0.1       | —   | 0.1       |               |  |                              |                   |
|                          |          | 4.5          | —                        | —   | 0.26      | —   | 0.33      |               |  |                              | $I_{OL} = 6$ mA   |
|                          |          | 6.0          | —                        | —   | 0.26      | —   | 0.33      |               |  |                              | $I_{OL} = 7.8$ mA |
| Off-state output current | $I_{OZ}$ | 6.0          | —                        | —   | $\pm 0.5$ | —   | $\pm 5.0$ | $\mu\text{A}$ | $V_{in} = V_{IH}$ or $V_{IL}$ ,<br>$V_{out} = V_{CC}$ or GND |                              |                   |
| Input current            | $I_{in}$ | 6.0          | —                        | —   | $\pm 0.1$ | —   | $\pm 1.0$ | $\mu\text{A}$ | $V_{in} = V_{CC}$ or GND                                     |                              |                   |
| Quiescent supply current | $I_{CC}$ | 6.0          | —                        | —   | 4.0       | —   | 40        | $\mu\text{A}$ | $V_{in} = V_{CC}$ or GND, $I_{out} = 0$ $\mu\text{A}$        |                              |                   |

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

Switching Characteristics ( $C_L = 50 \text{ pF}$ , Input  $t_r = t_f = 6 \text{ ns}$ )


| Item                    | Symbol                 | $V_{CC}$ (V) | $T_a = 25^\circ\text{C}$ |     |     | $T_a = -40 \text{ to } +85^\circ\text{C}$ |     | Unit | Test Conditions |
|-------------------------|------------------------|--------------|--------------------------|-----|-----|---|-----|------|-----------------|
|                         |                        |              | Min                      | Typ | Max | Min                                       | Max |      |                 |
| Maximum clock frequency | $f_{\max}$             | 2.0          | —                        | —   | 6   | —   | 5   | MHz  |                 |
|                         |                        | 4.5          | —                        | —   | 30  | —   | 24  |      |                 |
|                         |                        | 6.0          | —                        | —   | 35  | —   | 28  |      |                 |
| Propagation delay time  | $t_{PLH}$<br>$t_{PHL}$ | 2.0          | —                        | —   | 155 | —   | 195 | ns   | Clock to output |
|                         |                        | 4.5          | —                        | 13  | 31  | —   | 39  |      |                 |
|                         |                        | 6.0          | —                        | —   | 26  | —   | 33  |      |                 |
| Output enable time      | $t_{ZH}$<br>$t_{ZL}$   | 2.0          | —                        | —   | 150 | —   | 190 | ns   |                 |
|                         |                        | 4.5          | —                        | 13  | 30  | —   | 38  |      |                 |
|                         |                        | 6.0          | —                        | —   | 26  | —   | 33  |      |                 |
| Output disable time     | $t_{HZ}$<br>$t_{LZ}$   | 2.0          | —                        | —   | 150 | —   | 190 | ns   |                 |
|                         |                        | 4.5          | —                        | 15  | 30  | —   | 38  |      |                 |
|                         |                        | 6.0          | —                        | —   | 26  | —   | 33  |      |                 |
| Setup time              | $t_{su}$               | 2.0          | —                        | —   | 100 | —   | 125 | ns   |                 |
|                         |                        | 4.5          | —                        | 1   | 20  | —   | 25  |      |                 |
|                         |                        | 6.0          | —                        | —   | 17  | —   | 21  |      |                 |
| Hold time               | $t_h$                  | 2.0          | 5                        | —   | —   | 5   | —   | ns   |                 |
|                         |                        | 4.5          | 5                        | 0   | —   | 5   | —   |      |                 |
|                         |                        | 6.0          | 5                        | —   | —   | 5   | —   |      |                 |
| Pulse width             | $t_w$                  | 2.0          | 80                       | —   | —   | 100                                       | —   | ns   |                 |
|                         |                        | 4.5          | 16                       | 4   | —   | 20  | —   |      |                 |
|                         |                        | 6.0          | 14                       | —   | —   | 17  | —   |      |                 |
| Output rise/fall time   | $t_{rLH}$<br>$t_{rHL}$ | 2.0          | —                        | —   | 60  | —   | 75  | ns   |                 |
|                         |                        | 4.5          | —                        | 4   | 12  | —   | 15  |      |                 |
|                         |                        | 6.0          | —                        | —   | 10  | —   | 13  |      |                 |
| Input capacitance       | $C_{in}$               | —            | —                        | 5   | 10  | —   | 10  | pF   |                 |

Test Circuit

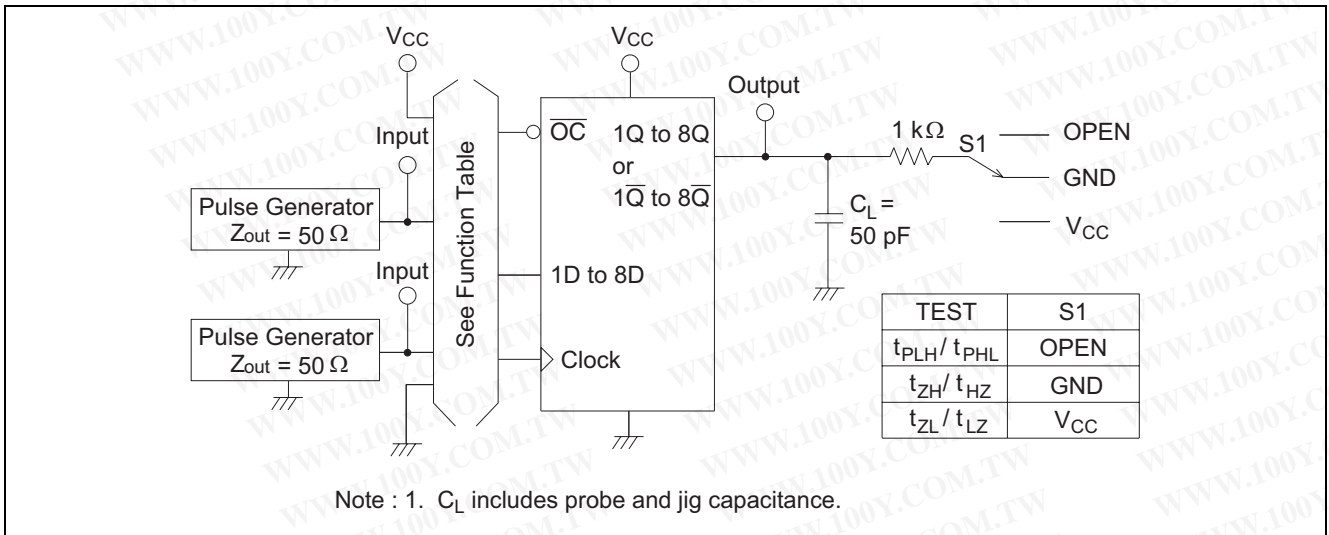

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
 Http://www.100y.com.tw


Waveforms

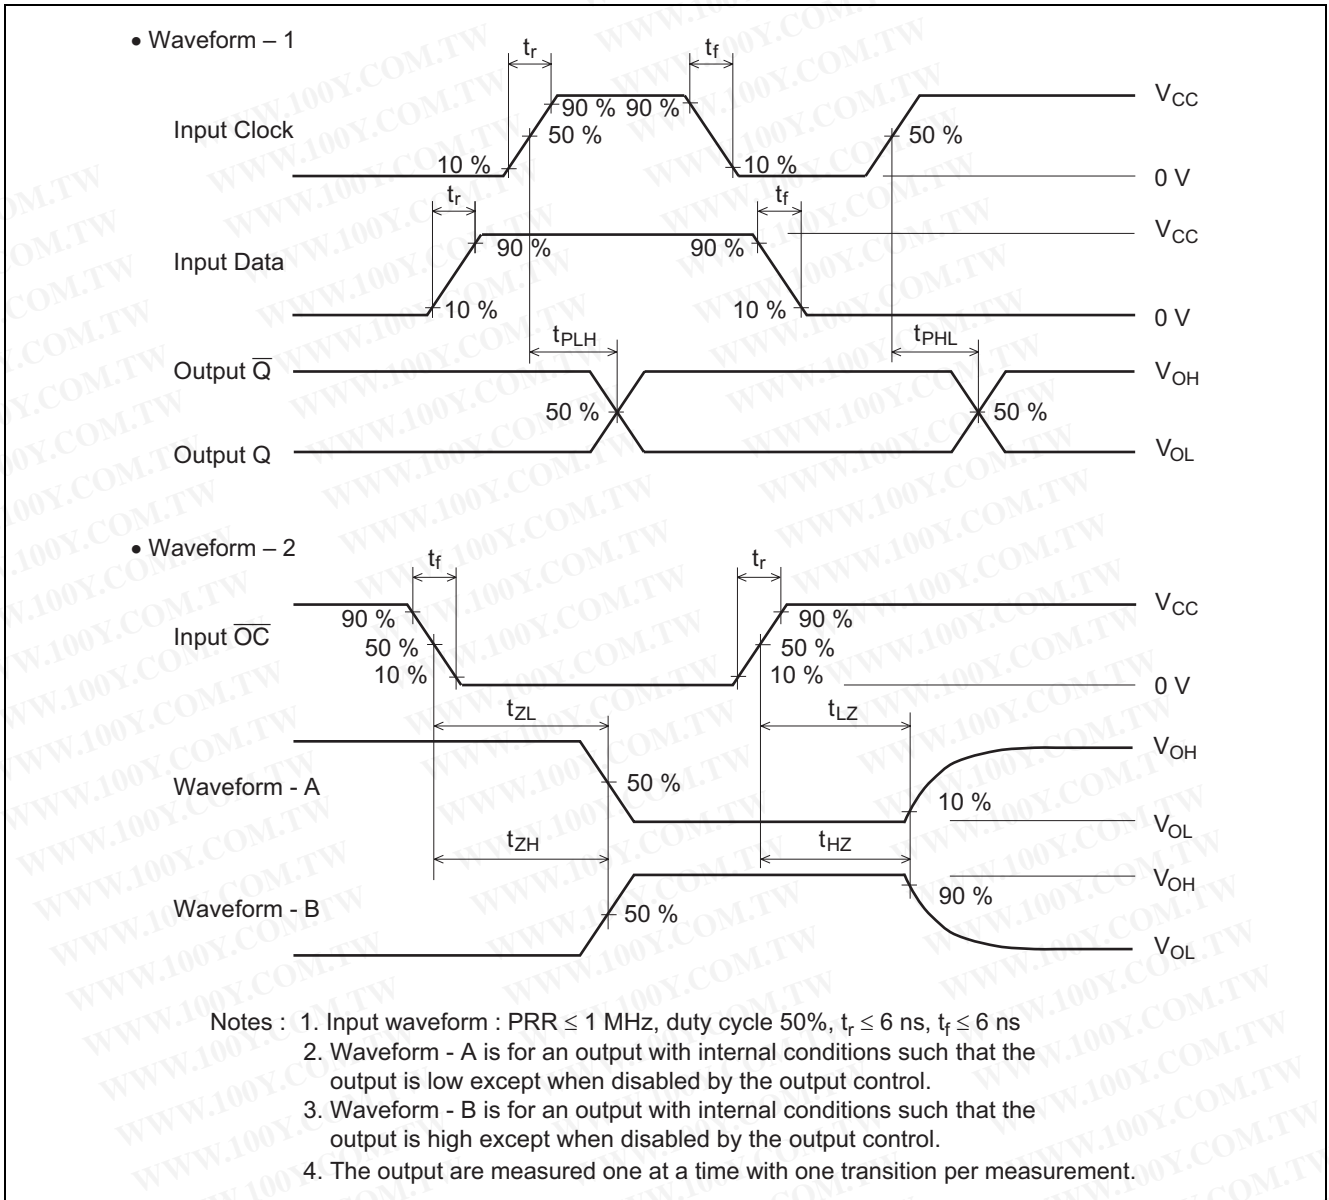


**勝特力材料 886-3-5753170**  
**勝特力电子(上海) 86-21-34970699**  
**勝特力电子(深圳) 86-755-83298787**  
[Http://www.100y.com.tw](http://www.100y.com.tw)

Package Dimensions

|                       |              |               |            |
|-----------------------|--------------|---------------|------------|
| JEITA Package Code    | RENESAS Code | Previous Code | MASS[Typ.] |
| P-DIP20-6.3x24.5-2.54 | PRDP0020AC-B | DP-20NEV      | 1.26g      |

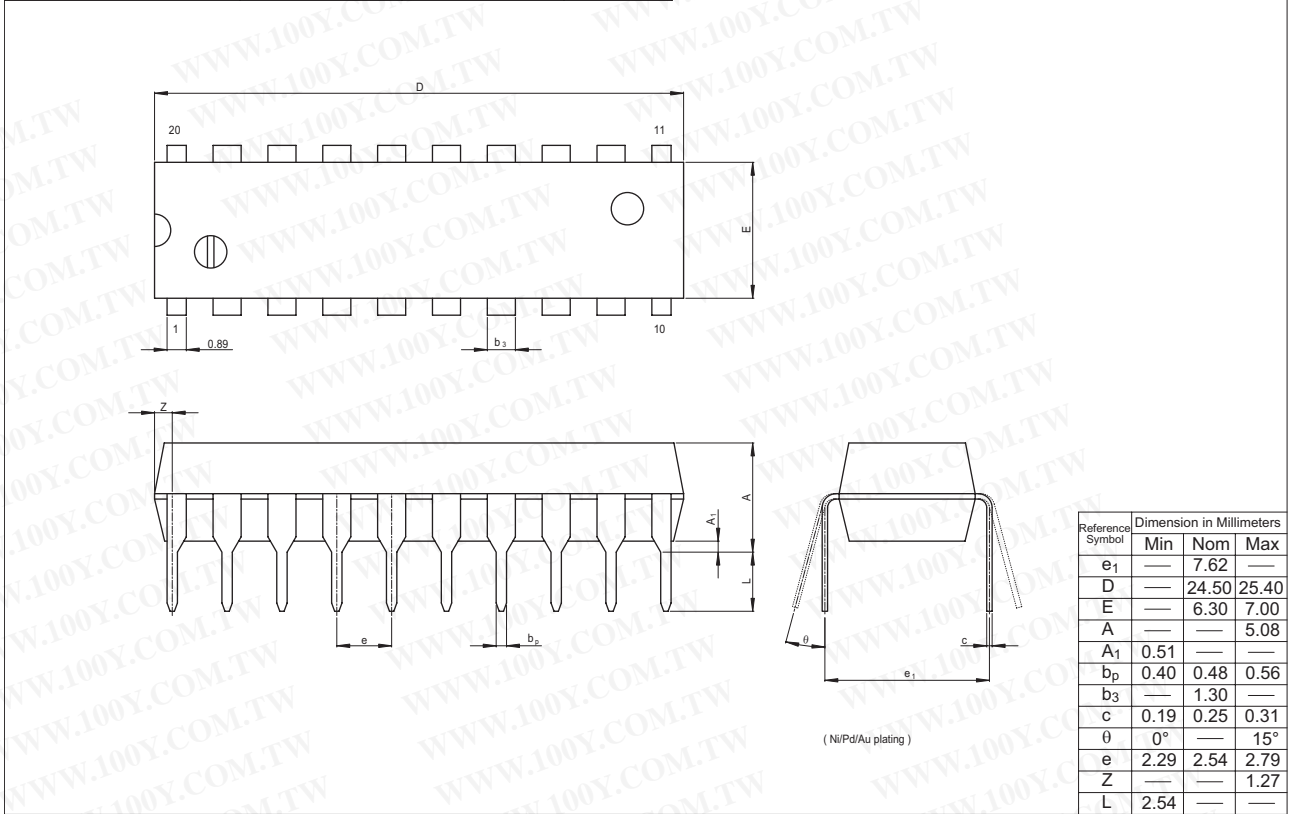


|                       |              |               |            |
|-----------------------|--------------|---------------|------------|
| JEITA Package Code    | RENESAS Code | Previous Code | MASS[Typ.] |
| P-SOP20-5.5x12.6-1.27 | PRSP0020DD-B | FP-20DAV      | 0.31g      |

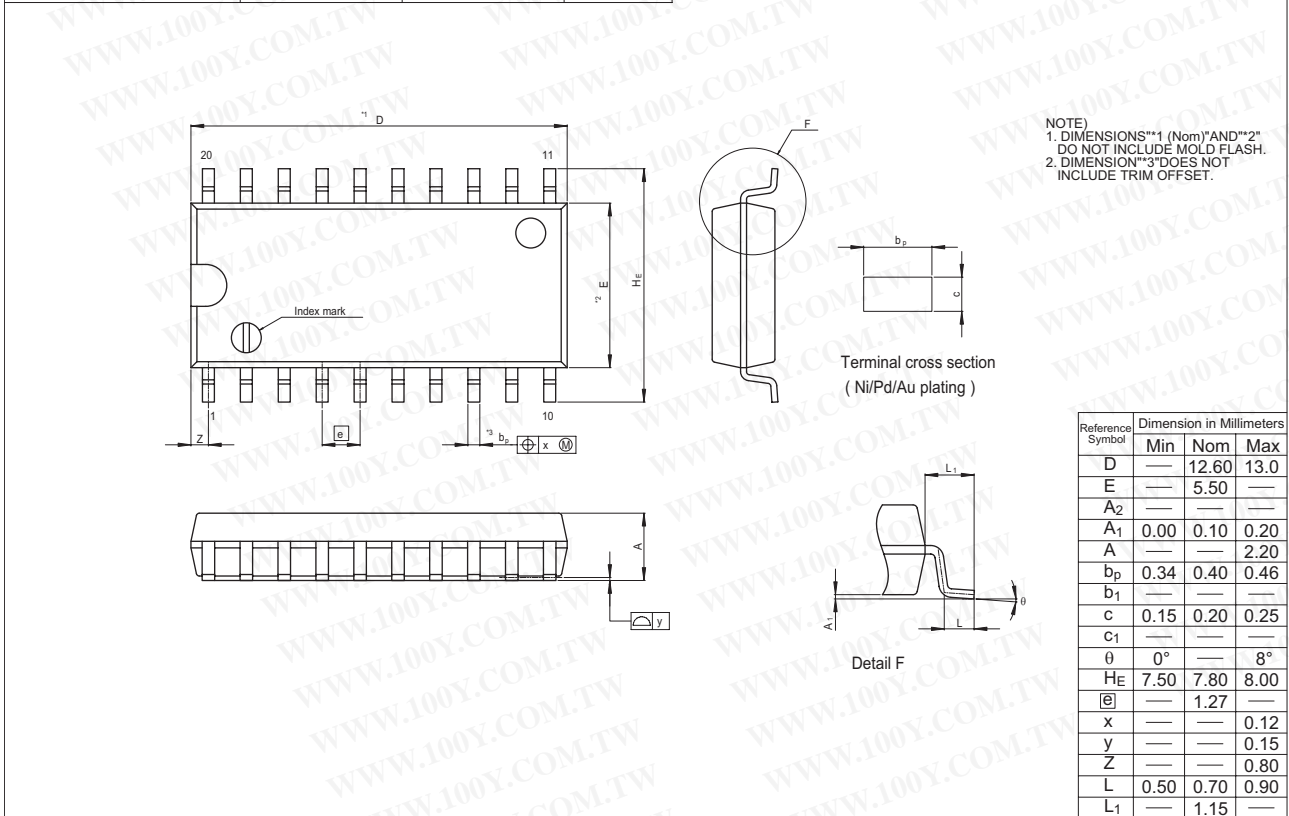

# HD74HC564, HD74HC574

|                       |              |               |            |
|-----------------------|--------------|---------------|------------|
| JEITA Package Code    | RENESAS Code | Previous Code | MASS[Typ.] |
| P-SOP20-7.5x12.8-1.27 | PRSP0020DC-A | FP-20DBV      | 0.52g      |

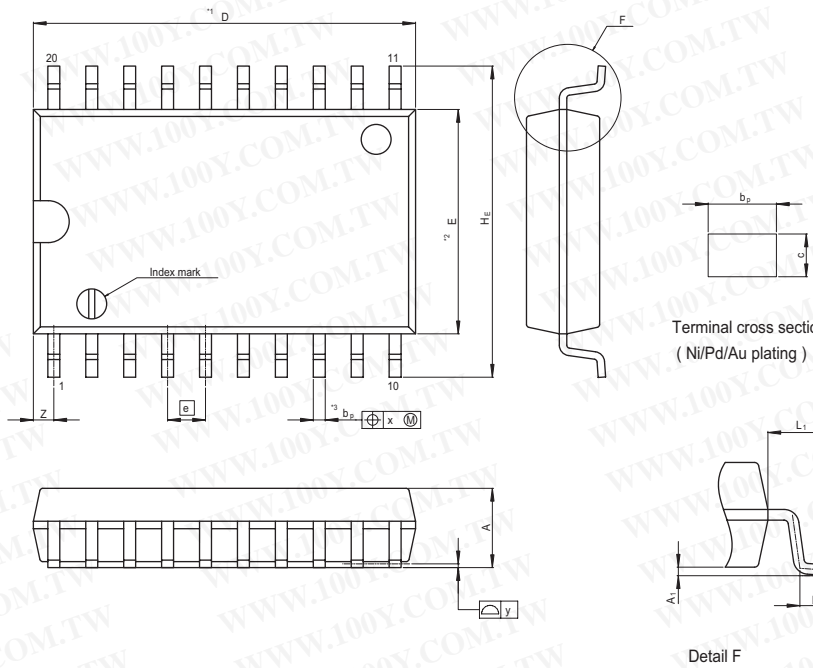

NOTE)  
 1. DIMENSIONS\*\*1 (Nom)\*\*AND\*\*2\*  
 @ DO NOT INCLUDE MOLD FLASH.  
 2. DIMENSION\*\*3\*DOES NOT  
 @ INCLUDE TRIM OFFSET.

| Reference Symbol | Dimension in Millimeters |       |       |
|------------------|--------------------------|-------|-------|
|                  | Min                      | Nom   | Max   |
| D                | —                        | 12.80 | 13.2  |
| E                | —                        | 7.50  | —     |
| A <sub>2</sub>   | —                        | —     | —     |
| A <sub>1</sub>   | 0.10                     | 0.20  | 0.30  |
| A                | —                        | —     | 2.65  |
| b <sub>p</sub>   | 0.34                     | 0.40  | 0.46  |
| b <sub>1</sub>   | —                        | —     | —     |
| c                | 0.20                     | 0.25  | 0.30  |
| c <sub>1</sub>   | —                        | —     | —     |
| θ                | 0°                       | —     | 8°    |
| He               | 10.00                    | 10.40 | 10.65 |
| @                | —                        | 1.27  | —     |
| x                | —                        | —     | 0.12  |
| y                | —                        | —     | 0.15  |
| z                | —                        | —     | 0.935 |
| L                | 0.40                     | 0.70  | 1.27  |
| L <sub>1</sub>   | —                        | 1.45  | —     |

**勝特力材料 886-3-5753170**  
**勝特力电子(上海) 86-21-34970699**  
**勝特力电子(深圳) 86-755-83298787**  
[Http://www.100y.com.tw](http://www.100y.com.tw)