

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Bulletin I2771 rev. E 04/03

International IOR Rectifier

MT SERIES

THREE PHASE BRIDGE

Power Modules

Features

- Universal, 3 way terminals:
push-on, wrap around or solder
- High thermal conductivity package,
electrically insulated case
- Center hole fixing
- Excellent power/volume ratio
- UL E 62320 approved 
- Terminals Solderable as per MIL-STD-202 METHOD 208,
solder: Sn/Pb (60/40); solder temperature: 235-260°C mx. time: 8-10 sec.

25 A
35 A

Description

A range of extremely compact, encapsulated three phase bridge rectifiers offering efficient and reliable operation. They are intended for use in general purpose and instrumentation applications.

Major Ratings and Characteristics

Parameters	26MT	36MT	Units
I_O	25	35	A
@ T_C	70	60	°C
I_{FSM}			
@ 50Hz	360	475	A
@ 60Hz	375	500	A
I^2t			
@ 50Hz	635	1130	A ² s
@ 60Hz	580	1030	A ² s
V_{RRM} range	100 to 1600		V
T_J	-55 to 150		°C

26MT../36MT.. Series

Bulletin I2771 rev. E 04/03

International
 Rectifier

ELECTRICAL SPECIFICATIONS

Voltage Ratings

Type number	Voltage Code	V_{RRM} , maximum repetitive peak reverse voltage V	V_{RSM} , maximum non-repetitive peak rev. voltage V	I_{RRM} max. @ T_J max. mA
26MT../36MT..	10	100	150	2
	20	200	275	
	40	400	500	
	60	600	725	
	80	800	900	
	100	1000	1100	
	120	1200	1300	
	140	1400	1500	
	160	1600	1700	

Forward Conduction

Parameters		26MT	36MT	Units	Conditions		
I _O	Maximum DC output current @ T _C	25	35	A	120° Rect Conduction angle		
		70	60	°C			
I _{FSM}	Maximum peak, one-cycle non-repetitive forward current Initial T _J = T _J max.	360	475	A	t = 10ms	No voltage	Initial T _J = T _J max.
		375	500		t = 8.3ms	reapplied	
		300	400		t = 10ms	100% V _{RRM}	
		314	420		t = 8.3ms	reapplied	
I ² t	Maximum I ² t for fusing Initial T _J = T _J max.	635	1130	A ² s	t = 10ms	No voltage	
		580	1030		t = 8.3ms	reapplied	
		450	800		t = 10ms	100% V _{RRM}	
		410	730		t = 8.3ms	reapplied	
I ² √t	Maximum I ² √t for fusing	6360	11300	A ² √s	I ² t for time t _x = I ² √t _x √t _x ; 0.1 ≤ t _x ≤ 10ms, V _{RRM} = 0V		
V _{F(TO)1}	Low-level of threshold voltage	0.88	0.86	V	(16.7% × π × I _{F(AV)}) < I < π × I _{F(AV)} , @ T _J max.		
V _{F(TO)2}	High-level of threshold voltage	1.13	1.03		(I > π × I _{F(AV)}), @ T _J max.		
r _{t1}	Low-level forward slope resistance	7.9	6.3	mΩ	(16.7% × π × I _{F(AV)}) < I < π × I _{F(AV)} , @ T _J max.		
r _{t2}	High-level forward slope resistance	5.2	5.0		(I > π × I _{F(AV)}), @ T _J max.		
V _{FM}	Maximum forward voltage drop	1.26	1.19	V	T _J = 25 °C, I _{FM} = 40A _{pk} - Per single Junction		
I _{RRM}	Max. DC reverse current	100		μA	T _J = 25 °C, per Junction at rated V _{RRM}		
V _{INS}	RMS isolation voltage	2700		V	T _J = 25 °C, All terminal shorted f=50Hz , t= 1s		

International IOR Rectifier

26MT../36MT.. Series

Bulletin I2771 rev. E 04/03


Thermal and Mechanical Specifications

Parameters	26MT	36MT	Units	Conditions
T_j Max. junction temperature range	-55 to 150		°C	
T_{stg} Max. storage temperature range	-55 to 150		°C	
R_{thJC} Max. thermal resistance junction to case	1.42	1.35	K/W	DC operation per bridge (Based on total power loss of bridge)
R_{thCS} Max. thermal resistance, case to heatsink	0.2	0.2	K/W	Mounting surface, smooth, flat and greased
wt Approximate weight	20		g	
T Mounting Torque $\pm 10\%$	2.0		Nm	Bridge to heatsink with screw M4

Ordering Information Table

Device Code		
36	MT	160
1	2	3
1	Current rating code: 26 = 25A (Avg) 36 = 35A (Avg)	
2	Basic part number	
3	Voltage code (code $\times 10 = V_{RRM}$)	

Outline Table

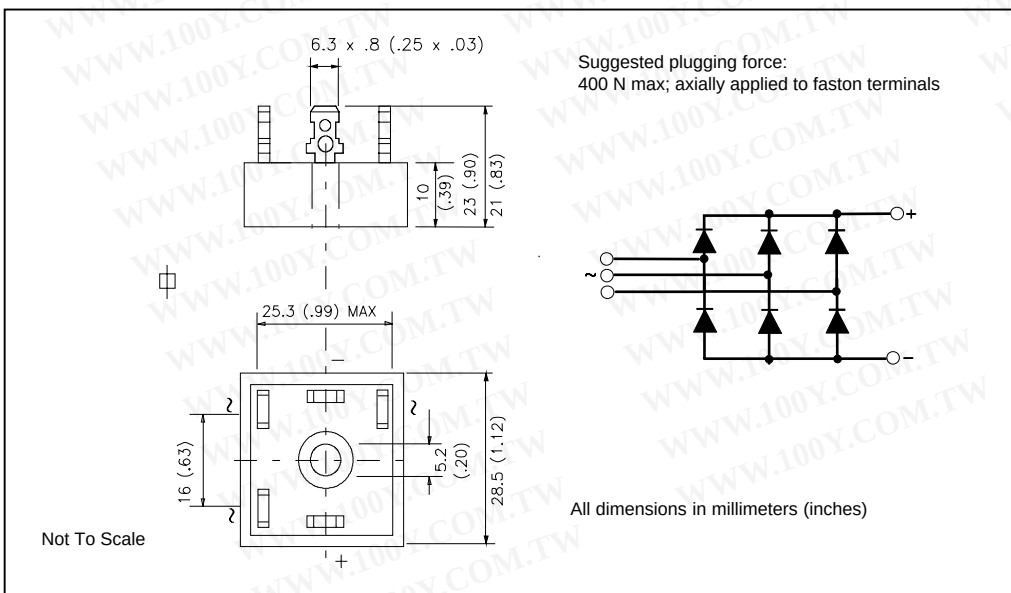

26MT../36MT.. Series

Bulletin I2771 rev. E 04/03

International
IOR Rectifier

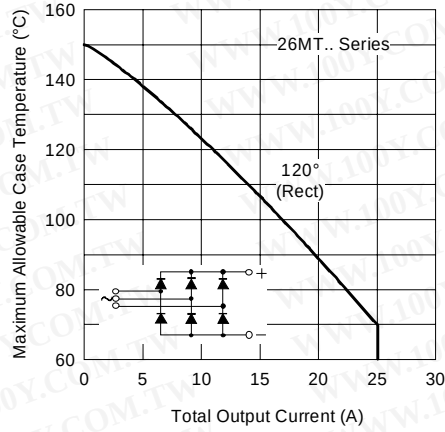


Fig. 1 - Current Ratings Characteristics

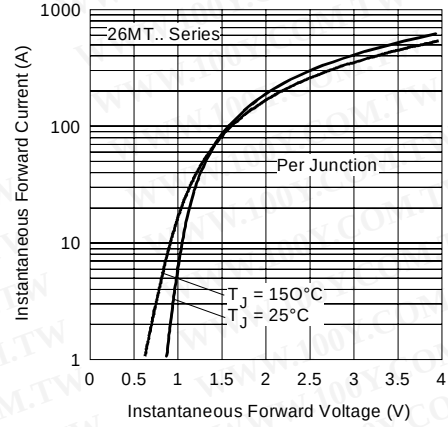


Fig. 2 - Forward Voltage Drop Characteristics

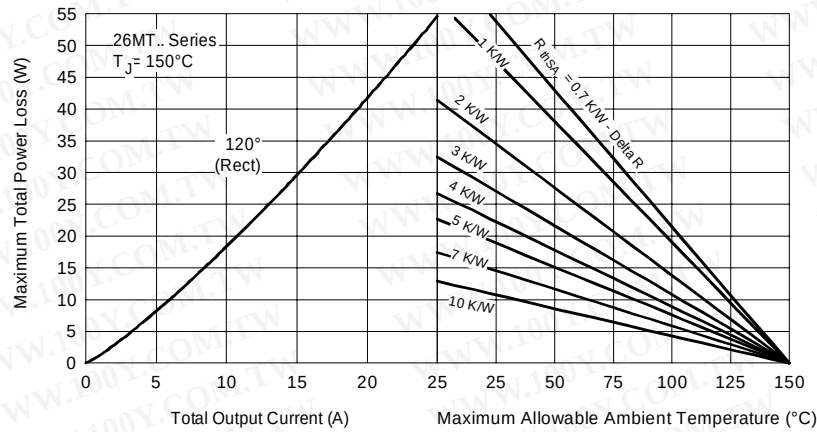


Fig. 3 - Total Power Loss Characteristics

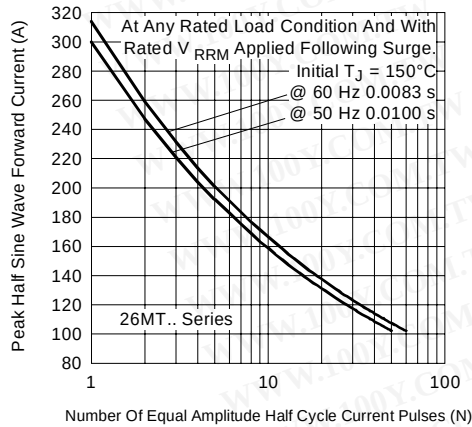


Fig. 4 - Maximum Non-Repetitive Surge Current

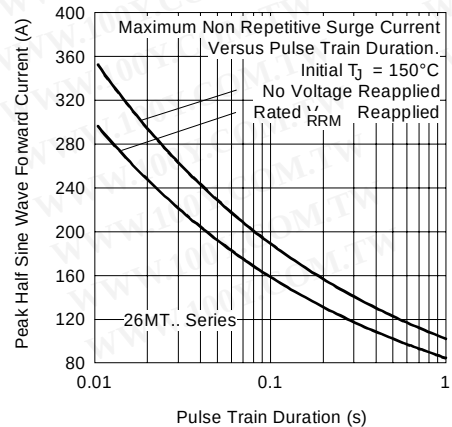


Fig. 5 - Maximum Non-Repetitive Surge Current

International IOR Rectifier

26MT../36MT.. Series

Bulletin I2771 rev. E 04/03

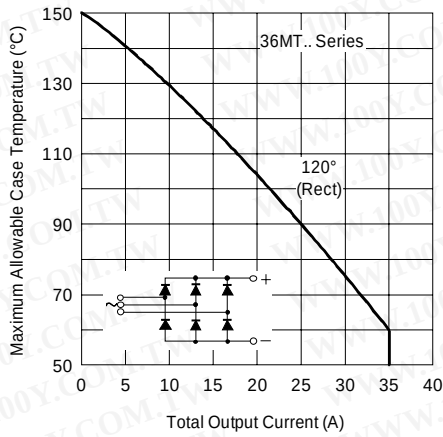


Fig. 6 - Current Ratings Characteristics

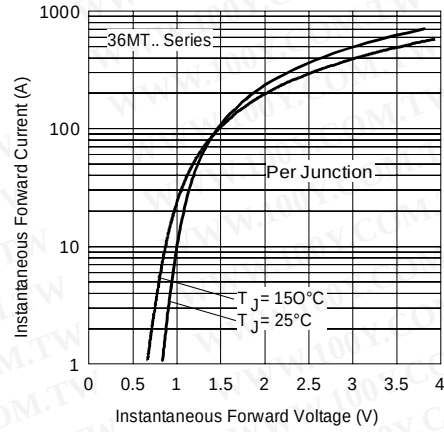


Fig. 7 - Forward Voltage Drop Characteristics

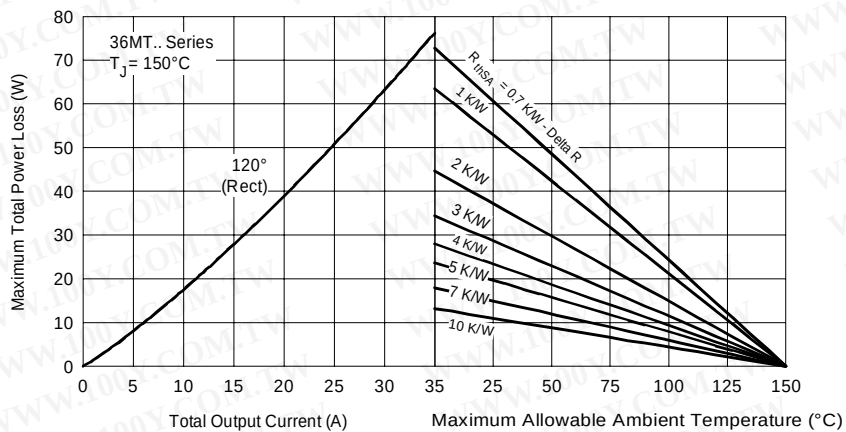


Fig. 8 - Total Power Loss Characteristics

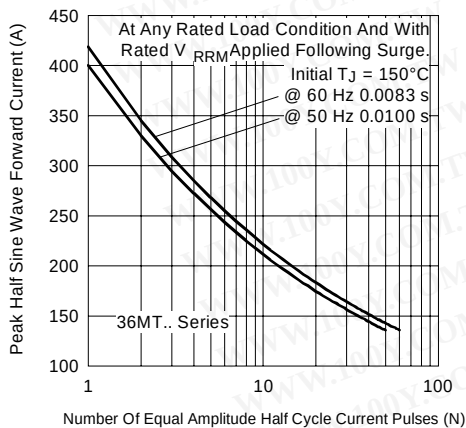


Fig. 9 - Maximum Non-Repetitive Surge Current

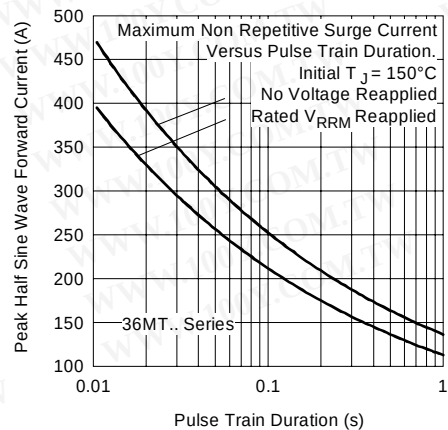


Fig. 10 - Maximum Non-Repetitive Surge Current

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

26MT../36MT.. Series

Bulletin I2771 rev. E 04/03

International
IR Rectifier

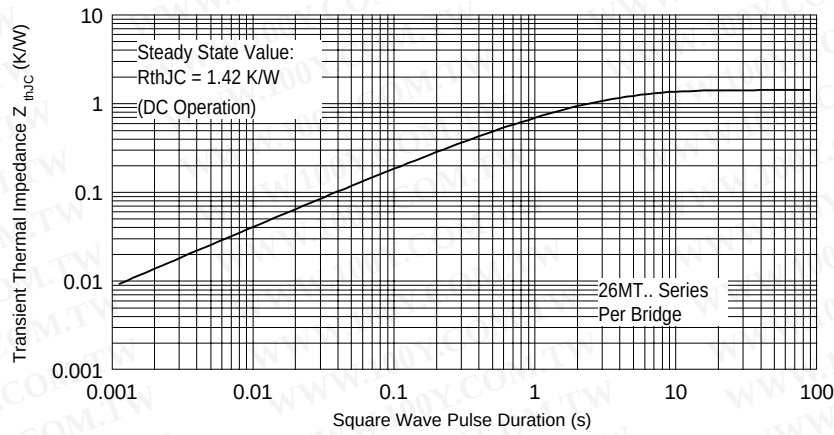


Fig. 11 - Thermal Impedance Z_{thJC} Characteristics

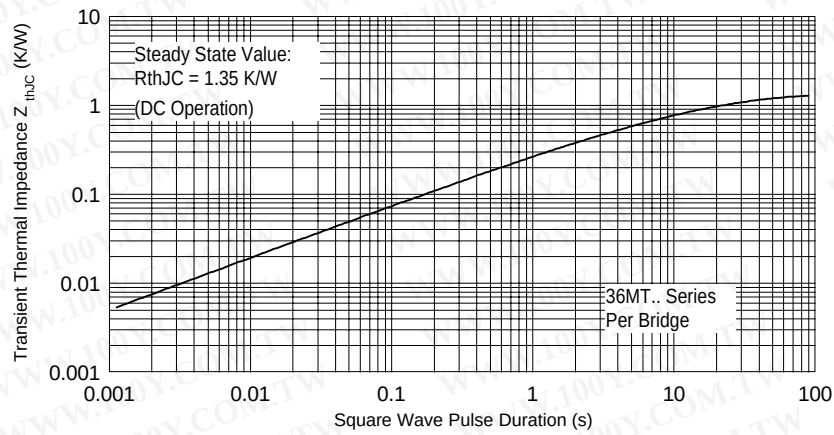


Fig. 12 - Thermal Impedance Z_{thJC} Characteristics

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial and Consumer Level.
Qualification Standards can be found on IR's Web site.

International
IR Rectifier