
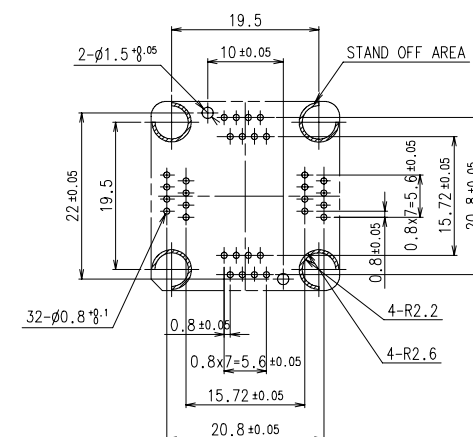


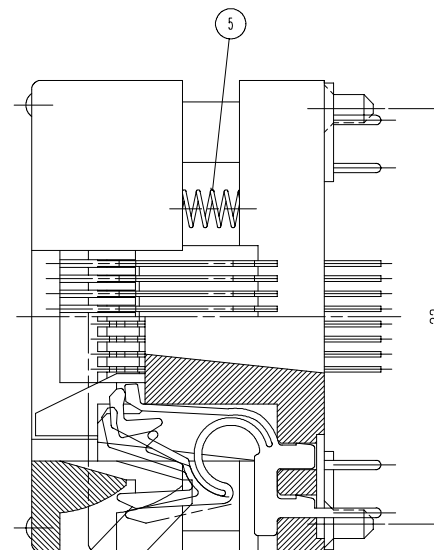


P.C.B PATTERN (2:1)
(TOP VIEW)


SPECIFICATION		仕 様
CONTACT RESISTANCE 接触抵抗	50 mΩ or less at 10mA (INITIAL)	
DIELECTRIC WITHSTANDING VOLTAGE 絶縁電圧	700 V A.C for 1 minute	
INSULATION RESISTANCE 絶縁抵抗	1000MΩ or more at 500V D.C	
OPERATING TEMPERATURE 使用温度	-65℃~150℃	
RETENTION FORCE 戻りばね力	4.9N(0.5kg)	
INSERTION 差込	10000 cycle (MECHANICAL)	
ACTION FORCE バネ力	MAX.14.7N(2.5kaf)	

NOTES

- 1) This socket concept is registered patent.
(U.S.P.4691975,JPN.P.1869849)

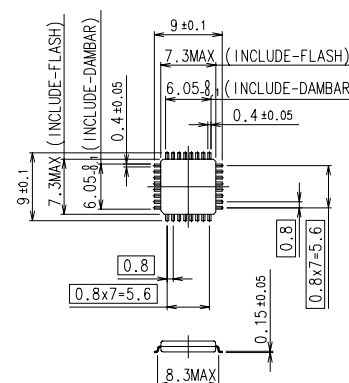

MATCHING DEVICE (2:1)

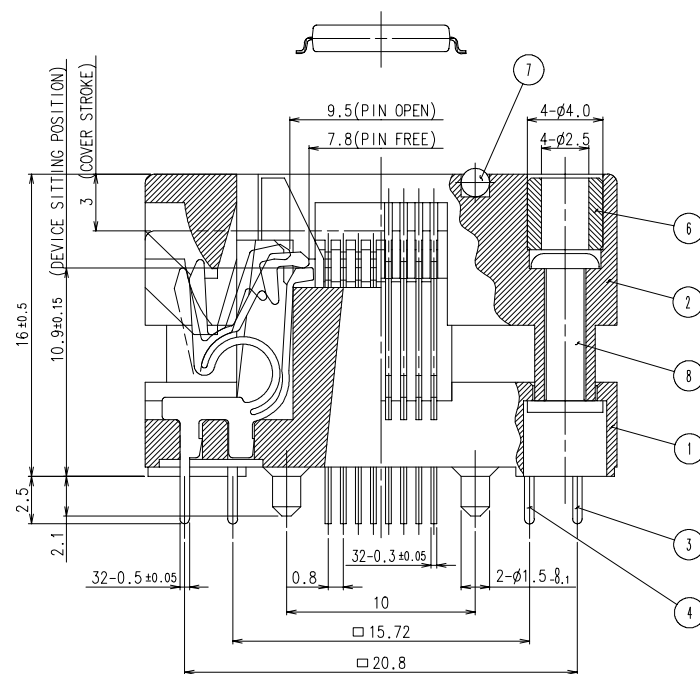

8	OTQ-80-0.5-02-004	55-111-273-01	RIVET リベット	AL	4	
7	OTQ-32-0.8-02-004	55-113-082-01	BALL ボール	SUS	4	φ1.5
6	OTQ-80-0.8-01-003	55-111-109-01	PIPE パイプ	SUS	4	
5	OTQ-32-0.8-02-003	55-112-067-01	COIL SPRING コイルスプリング	SUS	4	
4	OTQ-80-C004	55-110-343-01	CONTACT FOR FP BQ1 コンタクトピン BQ1	BeCu	16	
3	OTQ-80-C003	55-110-342-01	CONTACT FOR FP BP1 コンタクトピン BP1	BeCu	16	
2	OTQ-32-0.8-02-002	55-299-855-01	COVER カバー	PEI	1	
1	OTQ-32-0.8-02-001	55-299-854-01	BODY ボディ	PEI	1	

符号 SYM.	顧客品番 CUSTOMER'S PART NO.	図番 DWG. NO.	品名 NAME	材料 MAT'L	数量 Q'TY	備考 REMARKS
	使用 FOR	顧客品番 CUSTOMER'S PART NO.		一般公差 GENERAL TOLERANCES	±0.3	
承認者 APPROVED BY	M. OHSAKI	品名 NAME	070-32-0.8-02-00		尺数 SCALE	5:1
チェック CHECKED BY	M. OHSUNAGA	IC SOCKET			REV. NO.	C
設計者 DESIGNED BY	H. KISO					
描画者 DRAWN BY	A. MORISHITA	数量 DRAWING NO.	55-023-016-011			
作成年月日 ISSUED DATE	1989/06/30					

					STN.	CUSTOMER'S PART NO.
					USE FOR	
△					承認者 APPROVED BY	Y. HANASAKI
△					検査者 CHECKED BY	M. OKUNAGA
△					設計者 DESIGNED BY	H. KISO
△					描出者 DRAWN BY	A. MORISHITA
△	04.08.02	CAD化のため		A.M	承認者 APPROVED BY	1989/06/30
×	訂正年月日	訂正箇所 REVISED	承認者 APP.	描出 DRAWN	発行 ISSUED	