


# PC-41 轉接板

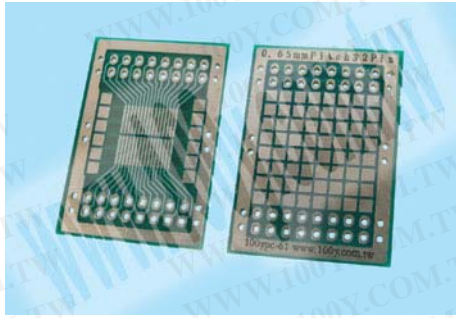

## 說明:


- Converts SOP IC 0.4 mm pitch into 2.54 mm pitch
- SOP converter board, 0.4 mm pitch
- SOP 轉換板, 間距:0.4mm

## Product Specification

Materials/thickness 材料/厚度	Double-sided glass epoxy (FR-4)1.0t 雙面玻璃環氧樹脂 (FR - 4) 厚度 1.0mm
Finish 完成	Through hole, gold plating, resist 貫孔, 鍍金
External terminals 外部端子	2.54 mm pitch 0.9Ø 間距 2.54mm
Reverse side 反向側	Surface-mount footprint 表面黏著
Board Size PCB 尺寸	68.04 x 33.66mm
Hole Diameter 孔徑	Ø 0.9mm
適用 IC 封裝	SOP48PIN

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

# PC-51 轉接板

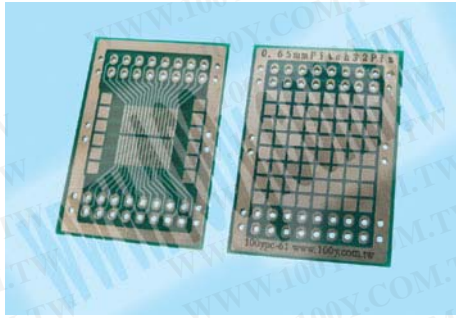

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)


## 說明:

- Converts SOP IC 0.5 mm pitch into 2.54 mm pitch
- SOP converter board, 0.5 mm pitch
- SOP 轉換板, 間距:0.5mm

## Product Specification

Materials/thickness 材料/厚度	Double-sided glass epoxy (FR-4)1.0t 雙面玻璃環氧樹脂 (FR - 4) 厚度 1.0mm
Finish 完成	Through hole, gold plating, resist 貫孔, 鍍金
External terminals 外部端子	2.54 mm pitch 0.9Ø 間距 2.54mm
Reverse side 反向側	Surface-mount footprint 表面黏著
Board Size PCB 尺寸	55.34 x 46.99mm
Hole Diameter 孔徑	Ø 0.9mm
適用 IC 封裝	SOP32PIN

# PC-52 轉接板

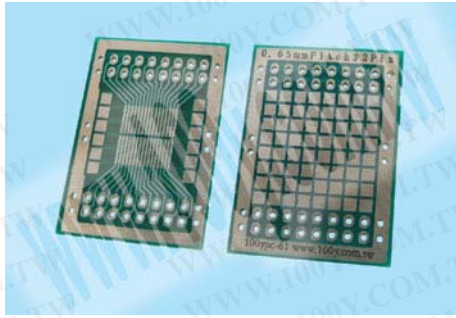

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)


## 說明:

- Converts SOP IC 0.5 mm pitch into 2.54 mm pitch
- SOP converter board, 0.5 mm pitch
- SOP 轉換板, 間距:0.5mm

## Product Specification

Materials/thickness 材料/厚度	Double-sided glass epoxy (FR-4)1.0t 雙面玻璃環氧樹脂 (FR - 4) 厚度 1.0mm
Finish 完成	Through hole, gold plating, resist 貫孔, 鍍金
External terminals 外部端子	2.54 mm pitch 0.9Ø 間距 2.54mm
Reverse side 反向側	Surface-mount footprint 表面黏著
Board Size PCB 尺寸	89.63 x 57.79mm
Hole Diameter 孔徑	Ø 0.9mm
適用 IC 封裝	SOP80PIN

# PC-53 轉接板

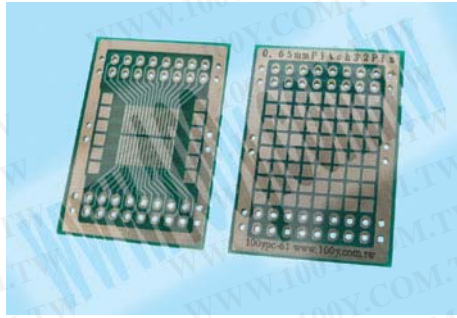

勝特力材料 886-8-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)


## 說明:

- Converts SOP IC 0.5 mm pitch into 2.54 mm pitch
- SOP converter board, 0.5 mm pitch
- SOP 轉換板, 間距:0.5mm

## Product Specification

Materials/thickness 材料/厚度	Double-sided glass epoxy (FR-4)1.0t 雙面玻璃環氧樹脂 (FR - 4) 厚度 1.0mm
Finish 完成	Through hole, gold plating, resist 貫孔, 鍍金
External terminals 外部端子	2.54 mm pitch 0.9Ø 間距 2.54mm
Reverse side 反向側	Surface-mount footprint 表面黏著
Board Size PCB 尺寸	68.04 x 38.73mm
Hole Diameter 孔徑	Ø 0.9mm
適用 IC 封裝	SOP48PIN

# PC-61 轉接板

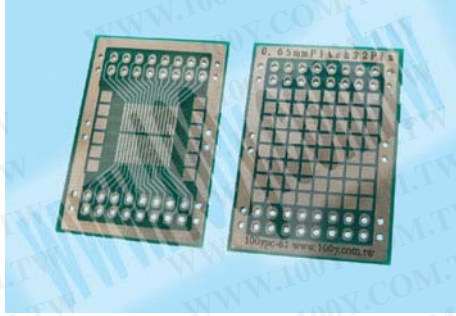

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)


## 說明:

- Converts SOP IC 0.65 mm pitch into 2.54 mm pitch
- SOP converter board, 0.65 mm pitch
- SOP 轉換板, 間距:0.65mm

## Product Specification

Materials/thickness 材料/厚度	Double-sided glass epoxy (FR-4)1.0t 雙面玻璃環氧樹脂 (FR - 4) 厚度 1.0mm
Finish 完成	Through hole, gold plating, resist 貫孔, 鍍金
External terminals 外部端子	2.54 mm pitch 0.9Ø 間距 2.54mm
Reverse side 反向側	Surface-mount footprint 表面黏著
Board Size PCB 尺寸	27 x 37mm
Hole Diameter 孔徑	Ø 0.9mm
適用 IC 封裝	SOP32PIN

# PC-62 轉接板

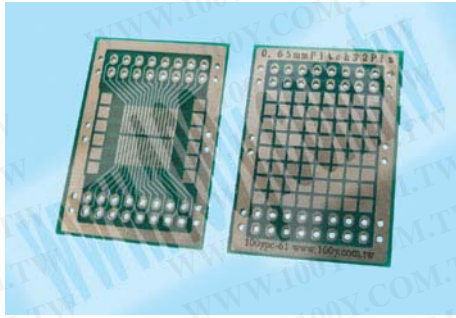

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)


## 說明:

- Converts SOP IC 0.65 mm pitch into 2.54 mm pitch
- SOP converter board, 0.65 mm pitch
- SOP 轉換板, 間距:0.65mm

## Product Specification

Materials/thickness 材料/厚度	Double-sided glass epoxy (FR-4)1.0t 雙面玻璃環氧樹脂 (FR - 4) 厚度 1.0mm
Finish 完成	Through hole, gold plating, resist 貫孔, 鍍金
External terminals 外部端子	2.54 mm pitch 0.9Ø 間距 2.54mm
Reverse side 反向側	Surface-mount footprint 表面黏著
Board Size PCB 尺寸	84.55 x 50.17mm
Hole Diameter 孔徑	Ø 0.9mm
適用 IC 封裝	SOP80PIN

# PC-63 轉接板

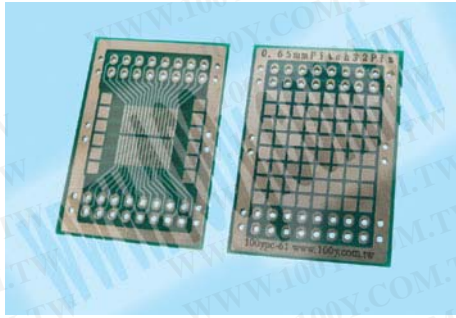

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)


## 說明:

- Converts SOP IC 0.635 mm pitch into 2.54 mm pitch
- SOP converter board, 0.635 mm pitch
- SOP 轉換板, 間距:0.635mm

## Product Specification

Materials/thickness 材料/厚度	Double-sided glass epoxy (FR-4)1.0t 雙面玻璃環氧樹脂 (FR - 4) 厚度 1.0mm
Finish 完成	Through hole, gold plating, resist 貫孔, 鍍金
External terminals 外部端子	2.54 mm pitch 0.9Ø 間距 2.54mm
Reverse side 反向側	Surface-mount footprint 表面黏著
Board Size PCB 尺寸	68.04 x 33.65mm
Hole Diameter 孔徑	Ø 0.9mm
適用 IC 封裝	SOP48PIN

# PC-64 轉接板

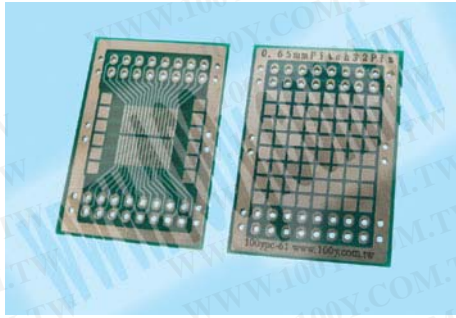

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)


## 說明:

- Converts SOP IC 0.65 mm pitch into 2.54 mm pitch
- SOP converter board, 0.65 mm pitch
- SOP 轉換板, 間距:0.65mm

## Product Specification

Materials/thickness 材料/厚度	Double-sided glass epoxy (FR-4)1.0t 雙面玻璃環氧樹脂 (FR - 4) 厚度 1.0mm
Finish 完成	Through hole, gold plating, resist 貫孔, 鍍金
External terminals 外部端子	2.54 mm pitch 0.9Ø 間距 2.54mm
Reverse side 反向側	Surface-mount footprint 表面黏著
Board Size PCB 尺寸	68.04 x 33.65mm
Hole Diameter 孔徑	Ø 0.9mm
適用 IC 封裝	SOP48PIN

# PC-81 轉接板

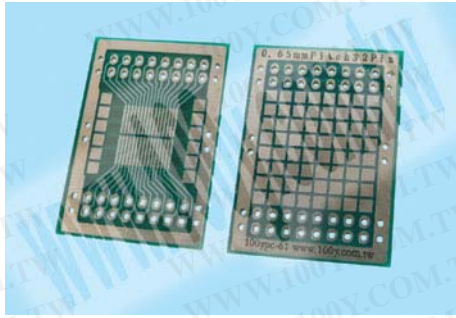

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)


## 說明:

- Converts SOP IC 0.8 mm pitch into 2.54 mm pitch
- SOP converter board, 0.8 mm pitch
- SOP 轉換板, 間距:0.8mm

## Product Specification

Materials/thickness 材料/厚度	Double-sided glass epoxy (FR-4)1.0t 雙面玻璃環氧樹脂 (FR - 4) 厚度 1.0mm
Finish 完成	Through hole, gold plating, resist 貫孔, 鍍金
External terminals 外部端子	2.54 mm pitch 0.9Ø 間距 2.54mm
Reverse side 反向側	Surface-mount footprint 表面黏著
Board Size PCB 尺寸	45.18 x 39.37mm
Hole Diameter 孔徑	Ø 0.9mm
適用 IC 封裝	SOP24PIN

# PC-82 轉接板

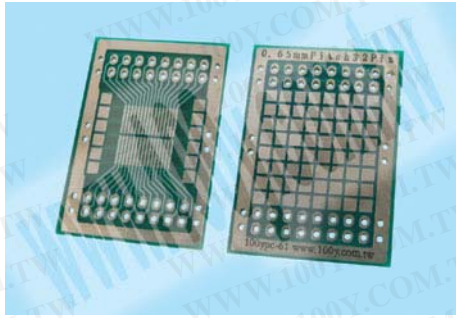

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)


## 說明:

- Converts SOP IC 0.8 mm pitch into 2.54 mm pitch
- SOP converter board, 0.8 mm pitch
- SOP 轉換板, 間距:0.8mm

## Product Specification

Materials/thickness 材料/厚度	Double-sided glass epoxy (FR-4)1.0t 雙面玻璃環氧樹脂 (FR - 4) 厚度 1.0mm
Finish 完成	Through hole, gold plating, resist 貫孔, 鍍金
External terminals 外部端子	2.54 mm pitch 0.9Ø 間距 2.54mm
Reverse side 反向側	Surface-mount footprint 表面黏著
Board Size PCB 尺寸	71.85 x 45.08mm
Hole Diameter 孔徑	Ø 0.9mm
適用 IC 封裝	SOP64PIN

# PC-83 轉接板

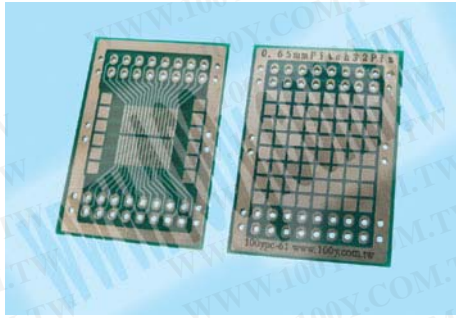

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)


## 說明:

- Converts SOP IC 0.8 mm pitch into 2.54 mm pitch
- SOP converter board, 0.8 mm pitch
- SOP 轉換板, 間距:0.8mm

## Product Specification

Materials/thickness 材料/厚度	Double-sided glass epoxy (FR-4)1.0t 雙面玻璃環氧樹脂 (FR - 4) 厚度 1.0mm
Finish 完成	Through hole, gold plating, resist 貫孔, 鍍金
External terminals 外部端子	2.54 mm pitch 0.9Ø 間距 2.54mm
Reverse side 反向側	Surface-mount footprint 表面黏著
Board Size PCB 尺寸	62.96 x 33.65mm
Hole Diameter 孔徑	Ø 0.9mm
適用 IC 封裝	SOP44PIN

# PC-84 轉接板

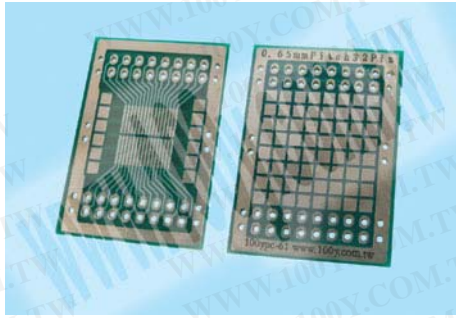

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)


## 說明:

- Converts SOP IC 0.8 mm pitch into 2.54 mm pitch
- SOP converter board, 0.8 mm pitch
- SOP 轉換板, 間距:0.8mm

## Product Specification

Materials/thickness 材料/厚度	Double-sided glass epoxy (FR-4)1.0t 雙面玻璃環氧樹脂 (FR - 4) 厚度 1.0mm
Finish 完成	Through hole, gold plating, resist 貫孔, 鍍金
External terminals 外部端子	2.54 mm pitch 0.9Ø 間距 2.54mm
Reverse side 反向側	Surface-mount footprint 表面黏著
Board Size PCB 尺寸	73.12 x 33.65mm
Hole Diameter 孔徑	Ø 0.9mm
適用 IC 封裝	SOP50PIN

# PC-101 轉接板

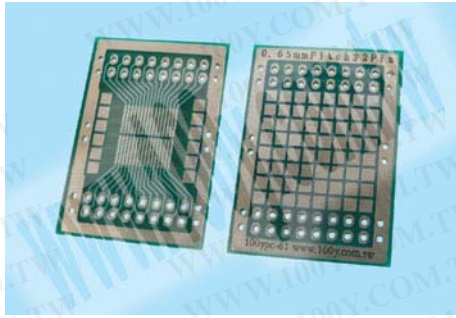

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)


## 說明:

- Converts SOP IC 1.0mm pitch into 2.54 mm pitch
- SOP converter board, 1.0 mm pitch
- SOP 轉換板, 間距:1.0mm

## Product Specification

Materials/thickness 材料/厚度	Double-sided glass epoxy (FR-4)1.0t 雙面玻璃環氧樹脂 (FR - 4) 厚度 1.0mm
Finish 完成	Through hole, gold plating, resist 貫孔, 鍍金
External terminals 外部端子	2.54 mm pitch 0.9Ø 間距 2.54mm
Reverse side 反向側	Surface-mount footprint 表面黏著
Board Size PCB 尺寸	40.10 x 39.37mm
Hole Diameter 孔徑	Ø 0.9mm
適用 IC 封裝	SOP20PIN

# PC-102 轉接板

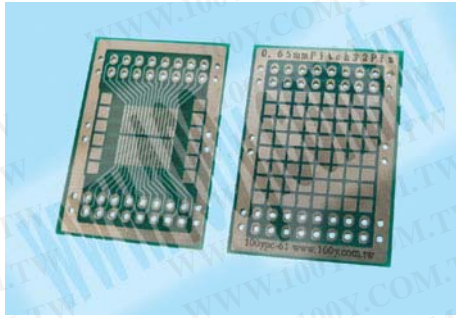

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)


## 說明:

- Converts SOP IC 1.0mm pitch into 2.54 mm pitch
- SOP converter board, 1.0 mm pitch
- SOP 轉換板, 間距:1.0mm

## Product Specification

Materials/thickness 材料/厚度	Double-sided glass epoxy (FR-4)1.0t 雙面玻璃環氧樹脂 (FR - 4) 厚度 1.0mm
Finish 完成	Through hole, gold plating, resist 貫孔, 鍍金
External terminals 外部端子	2.54 mm pitch 0.9Ø 間距 2.54mm
Reverse side 反向側	Surface-mount footprint 表面黏著
Board Size PCB 尺寸	64.23 x 42.545mm
Hole Diameter 孔徑	Ø 0.9mm
適用 IC 封裝	SOP40PIN

# PC-121 轉接板

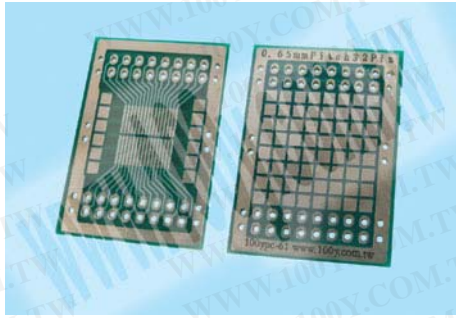

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)


## 說明:

- Converts SOP IC 1.27mm pitch into 2.54 mm pitch
- SOP converter board, 1.27 mm pitch
- SOP 轉換板, 間距:1.27mm

## Product Specification

Materials/thickness 材料/厚度	Double-sided glass epoxy (FR-4)1.0t 雙面玻璃環氧樹脂 (FR - 4) 厚度 1.0mm
Finish 完成	Through hole, gold plating, resist 貫孔, 鍍金
External terminals 外部端子	2.54 mm pitch 0.9Ø 間距 2.54mm
Reverse side 反向側	Surface-mount footprint 表面黏著
Board Size PCB 尺寸	70.58 x 39.37mm
Hole Diameter 孔徑	Ø 0.9mm
適用 IC 封裝	SOP44PIN

# PC-122 轉接板

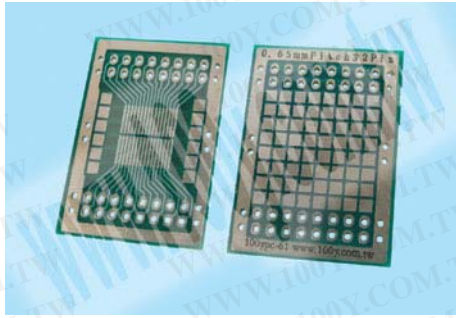

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)


## 說明:

- Converts SOP IC 1.27mm pitch into 2.54 mm pitch
- SOP converter board, 1.27 mm pitch
- SOP 轉換板, 間距:1.27mm

## Product Specification

Materials/thickness 材料/厚度	Double-sided glass epoxy (FR-4)1.0t 雙面玻璃環氧樹脂 (FR - 4) 厚度 1.0mm
Finish 完成	Through hole, gold plating, resist 貫孔, 鍍金
External terminals 外部端子	2.54 mm pitch 0.9Ø 間距 2.54mm
Reverse side 反向側	Surface-mount footprint 表面黏著
Board Size PCB 尺寸	57.24 x 22.86mm
Hole Diameter 孔徑	Ø 0.9mm
適用 IC 封裝	SOP16PIN

# PC-123 轉接板

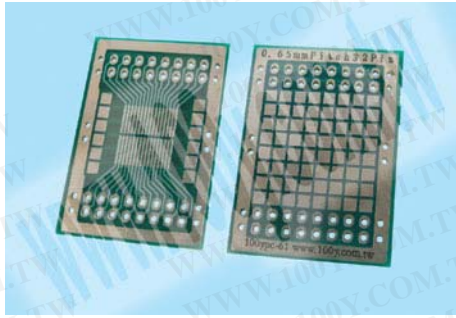

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## 說明:

- Converts SOP IC 1.27mm pitch into 2.54 mm pitch
- SOP converter board, 1.27 mm pitch
- SOP 轉換板, 間距:1.27mm

## Product Specification

Materials/thickness 材料/厚度	Double-sided glass epoxy (FR-4)1.0t 雙面玻璃環氧樹脂 (FR - 4) 厚度 1.0mm
Finish 完成	Through hole, gold plating, resist 貫孔, 鍍金
External terminals 外部端子	2.54 mm pitch 0.9Ø 間距 2.54mm
Reverse side 反向側	Surface-mount footprint 表面黏著
Board Size PCB 尺寸	64.23 x 43.18mm
Hole Diameter 孔徑	Ø 0.9mm
適用 IC 封裝	SOP32PIN