

4

3

2

1

REVISION DATA

REV	DESCRIPTION	DATE
A0	NEW DRAWING	2010-04-01

Technical Data

Material:

Pin: Brass,machined CuZn38Pb2

Plating:

Tin plated:2μm/80μ"Ni, 5μm/200μ"Sn

Gold Plated:2μm/80μ"nickelfull gold

Insulator black(housing): PBT (UL94V-0)

Electrical:

Current rating: 3Amps/contact max.

Contact resistance: ≤4mΩ/contact

Insulation resistance: ≥1000MΩ at V=100V





Operating voltage: 60VAC/DC

Mechanical:

Operating temperatures: Gold Plated:-55°C to+105°C


Tin plated:-40°C to+105°C

Soldering temperature: +220°C,10s max

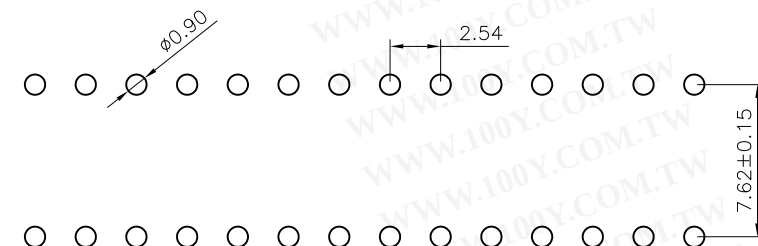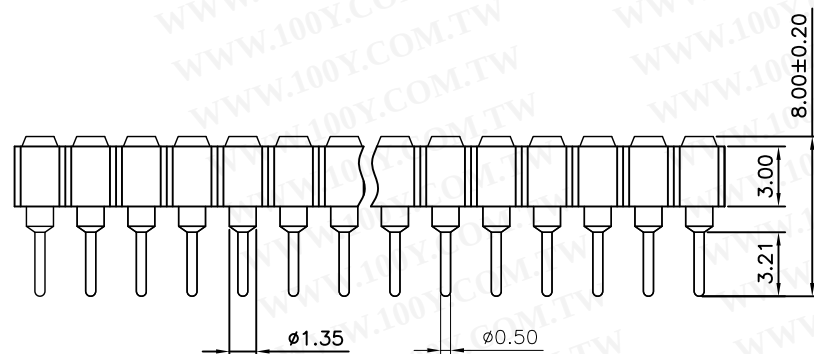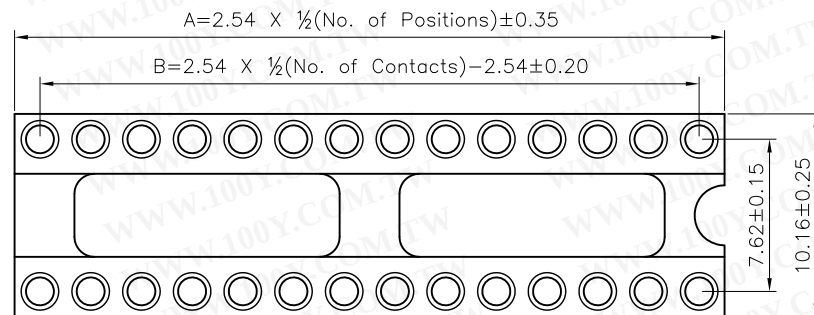

P.C.B LAYOUT

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

TOLERANCE	PROJECTON		TITLE: 2.54mmPitch IC Sockets Straight DIP Spacing 7.62mm Pin Length 8.0mm
ANGLE ±5°	DATE :	2010-04-01	
X.XXX ±0.10	DRAWN :	LiKui	PART NO: PADXXX37XXX0800IR00
X.XX ±0.20	CHECKED :		DRAWING NO:
X.X ±0.30	APPROVED :		REV: A0 UNIT: mm SCALE: 3:1 SIZE: A4
X. ±0.50			