

40T/R-16B

Aracteristics:

PARTS NUMBER	40T-16B	40R-16B
Center Frequency(KHz)	40.0±1.0	40.0±1.0
Sound Pressure Level (0 d.B=0.0002 μ bar)	119d.B/40±1.0KHz /10V SN/30cm(min)	----- -----
Sensitivity(min.) (0 d.B vs 1V/ μ bar)	----- -----	-65d.B/40±1.0KHz (R=3.9K)
Band Width(KHz)	4.0/112d.B	3.5/(at -71d.B)
Capacitance(PF)	2000±30%	2000±30%
Case Material/Mesh	Aluminium/Flower	Aluminium/Flower


Outline Dimensions:

A=16.1±0.3


B=12.0±0.4

C=9.5 ±1.0

D=10.0±0.5

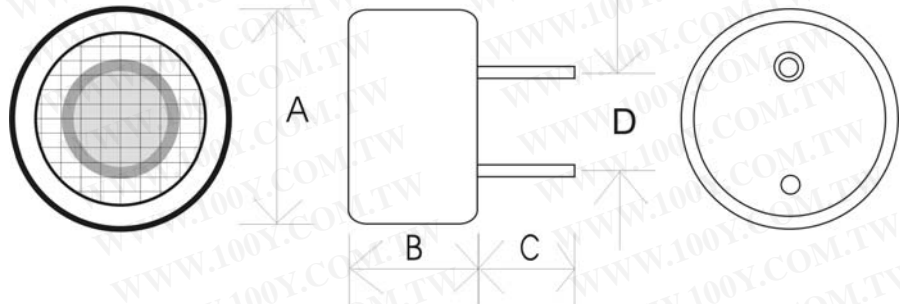

Test Circuit

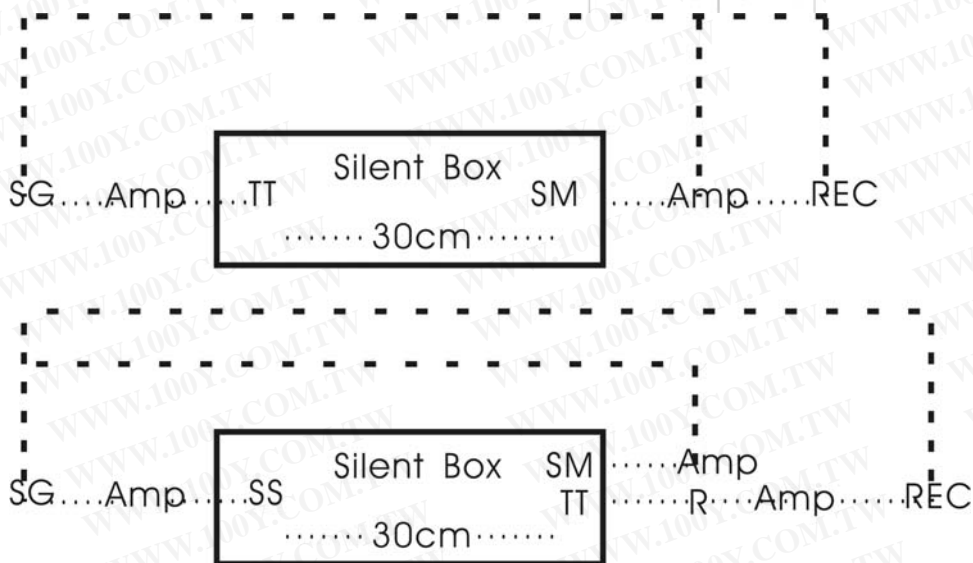

TT: test transducer

Rec: recorder

SM: std. Microphone

Amp: amplifier

SG: signal generator

R: 3.9k

SS: std. speaker

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)