




File: E209153



ISO9001:2008 Certified

Mechanical Specifications (mm)

D:	22.0	± max
T:	6.0	± max
Lead Diameter	1.0	± nom
S:	7.5	± nom
L:	38.0	± nom
Coating Lead Run Down (straight Leads)	5.0	± max
B:	9.35	± nom
C:	3.77	± nom

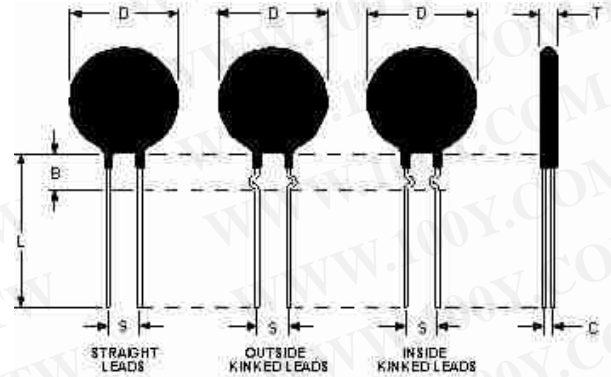

Electrical Specifications

Resistance:	10.0 Ω	± 20 %
Max Steady State Current upto 65°C:	8.00	A
Max Rec. Energy Rating:	90	J
Actual Failure Instantaneous Energy:	200	J
Maximum Capacitance @ 120 VAC:	6,000	µf
Maximum Capacitance @ 240 VAC:	1,400	µf
Resistance @ 100% Max Current:	0.10	Ω
Resistance @ 50% Max Current:	0.19	Ω
Body Temperature at 100% Max Current:	182.00	°c
Dissipation Constant:	32.4	mw/°c
Thermal Time Constant:	122	Sec.
Material Type (for Beta and Curve):	H	

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

SL22 10008	
Date: 11/11/2008	Drawn by: Erin Landis
Ametherm, Inc. 3111 N. Deer Run Road Carson City, Nevada USA 89701 www.ametherm.com	Approved By: Mehdi Samii
	Revision: a