

Proximity Sensors Capacitive Thermoplastic Polyester Housing Type EC, M 30, DC

TRIPLESIELD™

CARLO GAVAZZI



- Featuring **TRIPLESIELD™** Sensor protection
- Adjustable sensing distance 2-16 mm or 4-25 mm
- Rated operational voltage: 10-40 VDC
- Output: DC 200 mA, NPN or PNP
- Make and break switching function
- LED indication
- High noise immunity
- Flush and non-flush types
- Plug and Cable versions available
- AC versions in the same housing

Product Description

Capacitive proximity switches with either sensing distance 16 mm flush mounted in metal or sensing distance 25 mm non-flush mounted. 4-wire DC output with both make (NO)

and break (NC) switching. Grey M 30 polyester housing with 2 m PVC cable or plug. Ideal for use in level and plastic machinery applications.

Ordering Key

EC 3025 NPA P L-1

Type: Capacitive proximity switch
 Housing diameter (mm)
 Rated operating dist. (mm)
 Output type
 Housing material
 Housing type
 Connection type

Type Selection

Housing diameter	Rated operating dist. (S _n) ¹⁾	Mounting	Ordering no. Transistor NPN/cable Make & break switching	Ordering no. Transistor NPN/plug Make & break switching	Ordering no. Transistor PNP/cable Make & break switching	Ordering no. Transistor PNP/plug Make & break switching
M30	16 mm	Flush (built-in)	EC 3016 NPAPL	EC 3016 NPAPL-1	EC 3016 PPAPL	EC 3016 PPAPL-1
M30	25 mm	Non-flush	EC 3025 NPAPL	EC 3025 NPAPL-1	EC 3025 PPAPL	EC 3025 PPAPL-1

¹⁾ Object: Grounded steel plate

Specifications

Rated operating dist. (S_n) 3016:	2 to 16 mm factory set at 16 mm	Frequency of operating cycles (f)	50 Hz
3025:	4 to 25 mm factory set at 25 mm	Indication for output ON	LED, yellow
Sensitivity	Adj. multiturn pot.meter	Environment Degree of protection	IP 67 (Nema 1, 3, 4, 6, 13)
Effective operating dist. (S_r)	0.9 x S _n ≤ S _r ≤ 1.1 x S _n	Temperature Operating temperature Storage temperature	-25 to +80°C (-13 to +176°F) -40 to +85°C (-40 to +185°F)
Usable operating dist. (S_u)	0.8 x S _r ≤ S _u ≤ 1.2 x S _r	Housing material Body Cable end Nuts	Grey thermoplastic polyester Polyester Black reinforced nylon
Repeat accuracy (R)	≤ 5%	Connection Cable	Grey, 2 m, 4 x 0.34 mm ² Oil proof, PVC
Hysteresis (H)	3 to 20% of sensing distance	Plug (-1) Cable for plug (-1)	M12 x 1 CON.1A-series
Rated operational volt. (U_B)	10 to 40 VDC (ripple included)	Weight (incl. nuts)	3016: 140 g 3025: 150 g
Ripple	≤ 10%	Approvals CE-marking	UL, CSA Yes
Rated operational current (I_o) Continuous	≤ 200 mA		
No-load supply current (I_o)	≤ 10 mA (no load)		
Voltage drop (U_d)	≤ 2.5 VDC at max. load		
Protection	Reverse polarity, short-circuit, transients		



Specifications are subject to change without notice (25.06.99)

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)





Dimensions

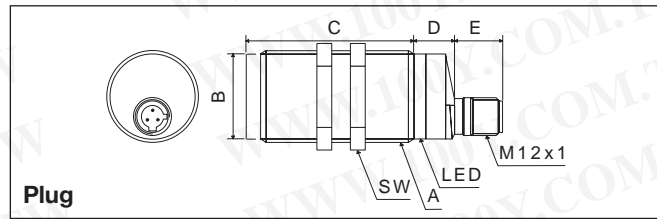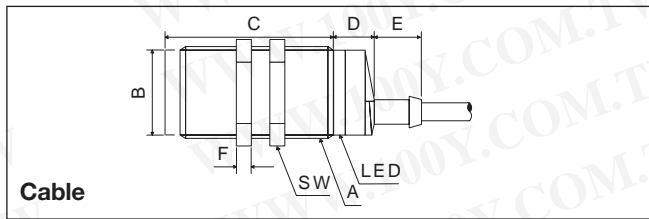

Type	A	B Ø mm	C mm	D mm	E mm	F mm	SW mm
EC 3016xPAPL(-1)	M 30 x 1.5 x 50	28	50	13.6	15.4	5	36
EC 3025xPAPL(-1)	M 30 x 1.5 x 50	28	62	13.6	15.4	5	36

Wiring Diagrams

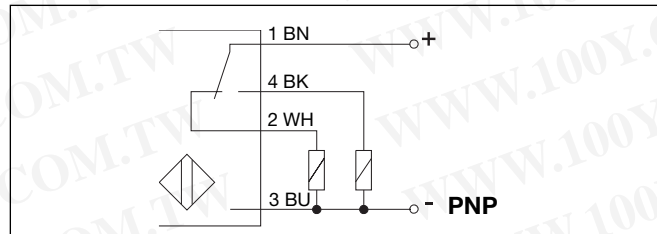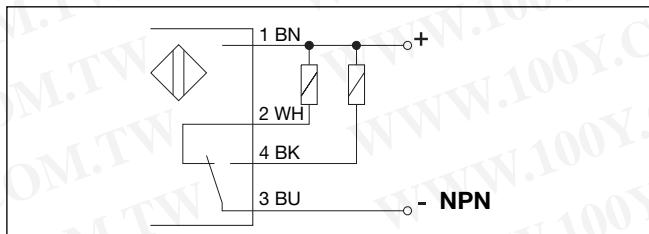


Adjustment Guide

The environments in which capacitive sensors are installed can often be unstable regarding temperature, humidity, object distance and industrial (noise) interference. Because of this, Carlo Gavazzi offers as standard features in all TRIPLESIELD™ capacitive sensors a user-friendly sensitivity adjustment instead of having a fixed sensing range, extended sensing range to accom-

modate mechanically demanding areas, temperature stability to ensure minimum need for adjusting sensitivity if temperature varies and high immunity to electromagnetic interference (EMI).

Note:
Sensors are factory set (default) to maximum rated sensing range.

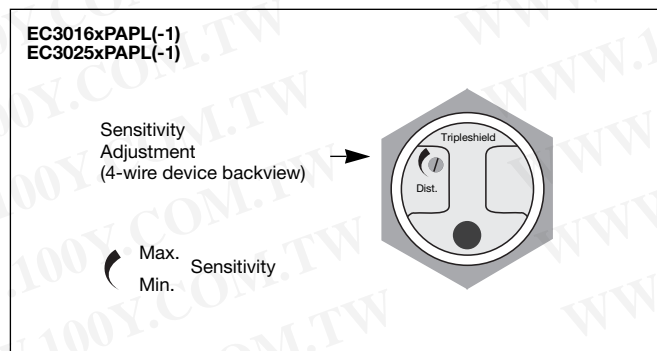

Installation Hints

Capacitive sensors have the unique ability to detect almost all materials, either in liquid or solid form. Capacitive sensors can detect metallic as well as non-metallic objects, however, their traditional use is for non-metallic materials such as:

- **Plastic Industry**
Resins, regrinds or moulded products.
- **Chemical Industry**
Cleansers, fertilisers, liquid soaps, corrosives and petrochemicals.
- **Wood Industry**
Saw dust, paper products, door and window frames.

- **Ceramic & Glass Industry**
Raw material, clay or finished products, bottles.
- **Packaging Industry**
Package inspection for level or contents, dry goods, fruits and vegetables, dairy products.

Materials are detected due to their dielectric constant. The bigger the size of an object, the higher the density of material, the better or easier it is to detect the object. Nominal sensing distance for a capacitive sensor is referenced to a grounded metal plate (ST37). For additional information regarding dielectric ratings of materials please refer to Technical Information.

Delivery Contents

- Capacitive switch: EC 30.. PAPL(-1)
- Screw driver
- 2 nuts
- **Packaging:** Cardboard box
- Installation & Adjustment Guide

Accessories

- Plugs CON.1A.. serie.
For further information please refer to "Accessories."