

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

High Temperature Industrial VRS Magnetic Speed Sensors



DESCRIPTION

High Temperature VRS sensors are designed for use in applications where the sensor is exposed to temperatures up to 260 °C [450 °F]. Sealed Front-End versions are available for applications where the sensor is exposed to fluids, lubricants or adverse environmental conditions.

Passive VRS (Variable Reluctance Speed) Magnetic Speed sensors are simple, rugged devices that do not require an external voltage source for operation.

A permanent magnet in the sensor establishes a fixed magnetic field. The approach and passing of a ferrous metal target near the sensor's pole piece (sensing area) changes the flux of the magnetic field, dynamically changing its strength. This change in magnetic field strength induces a current into a coil winding which is attached to the output terminals.

FEATURES

- Self-powered operation
- Direct conversion of actuator speed to output frequency
- Simple installation
- No moving parts
- Designed for use over a wide range of speeds
- Adaptable to a wide variety of configurations
- Customized VRS products for unique speed sensing applications
- Housing diameters: 5/8 in (M16), 3/8 in (M12), 1/4 in (8M)
- Housing material/style: stainless steel threaded
- Terminations: MS3106 connector, preleaded
- Output voltages: 4.7 Vp-p to 125 Vp-p

The output signal of a VRS sensor is an ac voltage that varies in amplitude and wave frequency as the speed of the monitored device changes, and is usually expressed in peak to peak voltage (Vp-p).

One complete waveform (cycle) occurs as each target passes the sensor's pole piece. If a standard gear were used as a target, this output signal would resemble a sine wave if viewed on an oscilloscope.

Honeywell also offers VRS sensors for general purpose, high output, power output, high resolution and hazardous location applications, as well as low-cost molded OEM versions.

POTENTIAL APPLICATIONS

- Engine RPM (revolutions per minute) measurement on aircraft, automobiles, boats, buses, trucks and rail vehicles
- Motor RPM measurement on drills, grinders, lathes and automatic screw machines
- Motor RPM measurement on precision camera, tape recording and motion picture equipment
- Process speed measurement on food, textile, paper, woodworking, printing, tobacco and pharmaceutical industry machinery
- Motor speed measurement of electrical generating equipment
- Speed measurement of pumps, blowers, mixers, exhaust and ventilating fans
- Flow measurement on turbine meters
- Wheel-slip measurement on autos and locomotives
- Gear speed measurement

High Temperature

5/8 INCH (M16*) SENSORS (All dimensions for reference only. mm/[in])

*Contact Honeywell for availability of metric mounting thread versions.

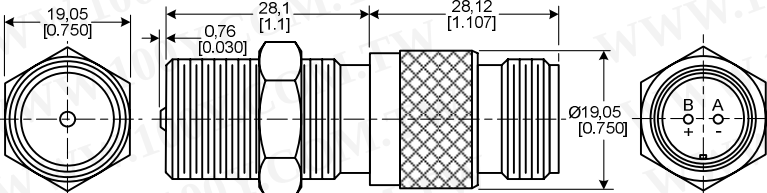
LOW RESISTANCE COILS FOR HIGH FREQUENCY APPLICATIONS

General Specifications

Parameter	Characteristic	Parameter	Characteristic
Min. output voltage	25 Vp-p	Inductance	30 mH max.
Coil resistance	65 Ohm typ.	Gear pitch range	24 DP (module 1.06) or coarser
Pole piece diameter	2,69 mm [0.106 in]	Optimum actuator	20 DP (module 1.27)
Min. surface speed	0,50 m/s [20 in/s] typ.	Max. operating frequency	50 kHz typ.
Operating temp. range	-55 °C to 230 °C [-67 °F to 450 °F]	Vibration	N/A
Mounting thread	5/8-18 UNF-2A	Termination	MS3106 connector

Test Condition Specifications

Parameter	Characteristic
Surface speed	25 m/s [1000 in/s]
Gear	20 DP (module 1.27)
Air gap	0,127 mm [0.005 in]
Load resistance	100 kOhm

Catalog Listing	Weight	
3010HTB	70 g [2.5 oz]	

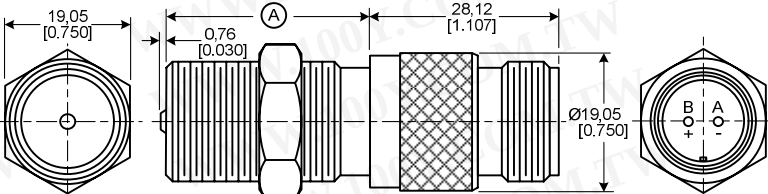
HIGH RESISTANCE COILS FOR MAXIMUM OUTPUT VOLTAGE APPLICATIONS

General Specifications

Parameter	Characteristic	Parameter	Characteristic
Min. output voltage	125 Vp-p	Inductance	450 mH max.
Coil resistance	1055 Ohm typ.	Gear pitch range	24 DP (module 1.06) or coarser
Pole piece diameter	2,69 mm [0.106 in]	Optimum actuator	20 DP (module 1.27)
Min. surface speed	0,25 m/s [10 in/s] typ.	Max. operating frequency	15 kHz typ.
Operating temp. range	-55 °C to 230 °C [-67 °F to 450 °F]	Vibration	N/A
Mounting thread	5/8-18 UNF-2A	Termination	MS3106 connector

Test Condition Specifications

Parameter	Characteristic
Surface speed	25 m/s [1000 in/s]
Gear	20 DP (module 1.27)
Air gap	0,127 mm [0.005 in]
Load resistance	100 kOhm

Catalog Listing	Thread Length (A)	Weight	
3030HTB	28 mm [1.1 in]	70 g [2.5 oz]	
3030HTB25	63 mm [2.5 in]	84 g [3.0 oz]	

Industrial VRS Magnetic Speed Sensors

5/8 INCH (M16*) SENSORS CONTINUED (All dimensions for reference only. mm/[in])

*Contact Honeywell for availability of metric mounting thread versions.

NOMINAL RESISTANCE COILS FOR LOW IMPEDANCE LOAD APPLICATIONS

General Specifications

Parameter	Characteristic	Parameter	Characteristic
Min. output voltage	45 Vp-p	Inductance	85 mH max.
Coil resistance	141 Ohm typ.	Gear pitch range	12 DP (module 2.11) or coarser
Pole piece diameter	4,75 mm [0.187 in]	Optimum actuator	8 DP (module 3.17)
Min. surface speed	0,38 m/s [15 in/s] typ.	Max. operating frequency	40 kHz typ.
Operating temp. range	-55 °C to 230 °C [-67 °F to 450 °F]	Vibration	N/A
Mounting Thread	5/8-18 UNF-2A	Termination	MS3106 Connector

Test Condition Specifications

Parameter	Characteristic
Surface speed	25 m/s [1000 in/s]
Gear	8 DP (module 3.17)
Air gap	0,127 mm [0.005 in]
Load resistance	1.25 kOhm

Catalog Listing	Thread Length (A)	Weight	
3040HTB	28 mm [1.1 in]	70 g [2.5 oz]	
3040HTB25	63 mm [2.5 in]	84 g [3.0 oz]	

High Temperature

5/8 INCH SEALED FRONT-END SENSORS (All dimensions for reference only. mm/[in])
(No metric available.)

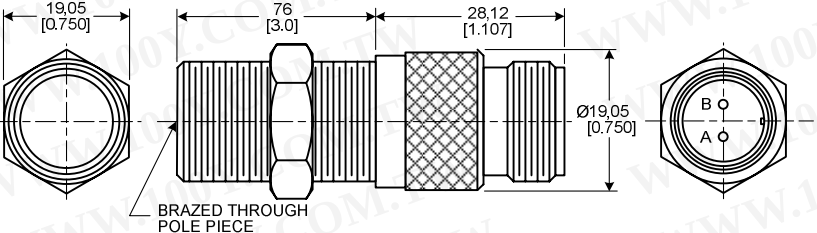
NOMINAL RESISTANCE COILS FOR LOW IMPEDANCE LOADS APPLICATIONS

General Specifications

Parameter	Characteristic	Parameter	Characteristic
Min. output voltage	60 Vp-p	Inductance	85 mH max.
Coil resistance	120 Ohm to 162 Ohm	Gear pitch range	12 DP (module 2.11) or coarser
Pole piece diameter	4,39 mm [0.173 in]	Optimum actuator	8 DP (module 3.17)
Min. surface speed	0,38 m/s [15 in/s] typ.	Max. operating frequency	40 kHz typ.
Operating temp. range	-54 °C to 220 °C [-65 °F to 428 °F]	Vibration	N/A
Mounting Thread	5/8-18 UNF-2A	Termination	MS3106 connector

Test Condition Specifications

Parameter	Characteristic
Surface speed	25 m/s [1000 in/s]
Gear	8 DP (module 3.17)
Air gap	0,127 mm [0.005 in]
Load resistance	1.25 kOhm

Catalog Listing	Weight	
MA243HT	98 g [3.5 oz]	

Industrial VRS Magnetic Speed Sensors

3/8 INCH (M12*) SENSORS (All dimensions for reference only. mm/[in])

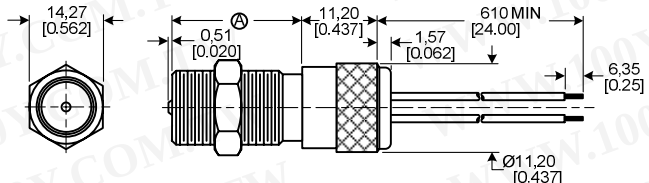
*Contact Honeywell for availability of metric mounting thread versions.

General Specifications

Parameter	Characteristic	Parameter	Characteristic
Min. output voltage	15 Vp-p	Inductance	31 mH max.
Coil resistance	110 Ohm max.	Gear pitch range	26 DP (module 0.98) or coarser
Pole piece diameter	2,36 mm [0.093 in]	Optimum actuator	24 DP (module 1.06) ferrous metal gear
Min. surface speed	0,75 m/s [20 in/s] typ.	Max. operating frequency	50 kHz typ.
Operating temp. range	-40 °C to 205 °C [-40 °F to 400 °F]	Vibration	N/A
Mounting thread	3/8-24 UNF-2A	Termination	24 AWG Teflon-insulated leads

Test Condition Specifications

Parameter	Characteristic
Surface speed	25 m/s [1000 in/s]
Gear	20 DP (module 1.27)
Air gap	0,127 mm [0.005 in]
Load resistance	100 kOhm

Catalog Listing	Thread Length (A)	Weight	
3015HTB	20 mm [0.8 in]	28 g [1.0 oz]	
3015HTB15	38 mm [1.5 in]	42 g [1.5 oz]	

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

High Temperature

1/4 INCH (M8*) MINIATURE SENSORS (All dimensions for reference only. mm/[in])

*Contact Honeywell for availability of metric mounting thread versions.

General Specifications

Parameter	Characteristic	Parameter	Characteristic
Min. output voltage	4.7 Vp-p	Inductance	13 mH max.
Coil resistance	137 Ohm max.	Gear pitch range	36 DP (module 0.70) or coarser
Pole piece diameter	1 mm [0.040 in]	Optimum actuator	28 DP (Module 0.90) ferrous metal gear
Min. surface speed	0,89 m/s [35 in/s] typ.	Max. operating frequency	70 kHz typ.
Operating temp. range	-40 °C to 230 °C [-40 °F to 450 °F]	Vibration	Mil-Std 202F Method 204D
Mounting thread	1/4-40 UNS-2A	Termination	30 AWG Teflon- Insulated Leads

Test Condition Specifications

Parameter	Characteristic
Surface speed	25 m/s [1000 in/s]
Gear	20 DP (module 1.27)
Air gap	0,127 mm [0.005 in]
Load resistance	100 kOhm

Catalog Listing	Weight	
3055A	14 g [0.5 oz]	

Industrial VRS Magnetic Speed Sensors

1/4 INCH SEALED FRONT-END SENSORS (All dimensions for reference only. mm/[in])

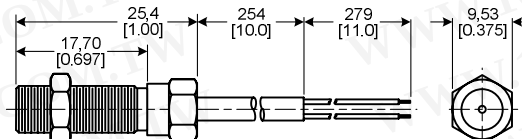
(No metric available.)

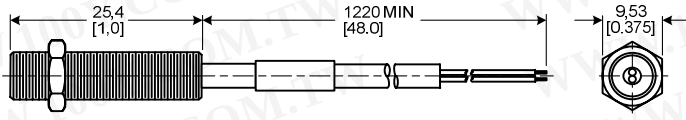
General Specifications

Parameter	Characteristic	Parameter	Characteristic
Min. output voltage	5.2 Vp-p	Inductance	85 mH max.
Coil resistance	20 Ohm to 45 Ohm	Gear pitch range	36 DP (module 0.70) or coarser
Pole piece diameter	1 mm [0.040 in]	Optimum actuator	28 DP (module 0.90) ferrous metal gear
Min. surface speed	0,89 m/s [35 in/s] typ.	Max. operating frequency	70 kHz typ.
Operating temp. range	-73 °C to 230 °C [-100 °F to 450 °F]	Vibration	Mil-Std 202F Method 204D
Mounting Thread	1/4-40 UNS-2A	Termination	28 AWG Teflon-insulated leads

Test Condition Specifications

Parameter	Characteristic
Surface speed	25 m/s [1000 in/s]
Gear	20 DP (module 1.27)
Air gap	0,127 mm [0.005 in]
Load resistance	100 kOhm

Catalog Listing	Weight	
MA3055	28 g [1 oz]	

Catalog Listing	Weight	
MA3055S10	28 g [1 oz]	

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)