

Robust, efficient, low-priced

- pivoted guide bar
- perfectly balanced
- wrinkle-free welding
- easy maintenance with standard components
- digital display of temperature and speed
- automatic drive start system
- designed for the most demanding job sites
- for welding of roofing membranes and tarpaulins
- high speed production



Wrinkle-free welding because of design and balance. Economic and user friendly, high welding speed and field tested.



勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Technical data



Voltage	V	230/400
Frequency	Hz	50/60
Power consumption	W	4600/5700
Temperature	°C	20-620
Speed	m/min.	max. 7
Size (l x w x h)	mm	620x400x320
Weight	kg	35
Markings		CE

堅固耐用 高效能 低價位

- 中樞導板
- 完美平衡設計
- 防皺焊接
- 標準配件容易保養
- 以數字顯示溫度和速度
- 自動驅動啟動系統
- 專為要求最嚴苛的工作環境而設計
- 可焊接屋面防水膜材和防水油布
- 可高速焊接



平衡防皺設計，具經濟效益容易使用
，高速焊接，完整環境測試。

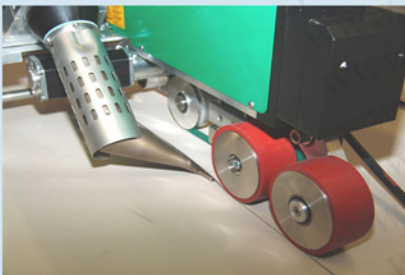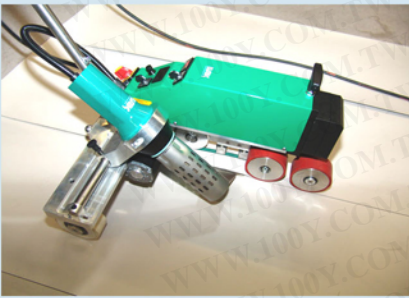

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

拉龍LarOn規格

適用電壓(V)	V ~	230/400
功率消耗	W	4600/5700
頻率	Hz	50/60
溫度	°C	20-620
速度	m/min	最大 7
尺寸	mm	620x400x320
重量	kg	35
CE		符合CE認證