

# Soldering Station FX-888

## Features:

- Space savings
- Superior heat recovery - Output has been increased by 30% compared to Hakko 936
- 3 types of cleaning methods available in one holder
- Thermal calibration screwdriver included as standard accessory
- ESD safe

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## Applications:

- Lead free soldering
- Soldering for PTH/SMT component


## Specifications:



<b>Model</b>	FX-888
<b>Main body color</b>	Blue & yellow
<b>Power Consumption</b>	70W
<b>Temperature range</b>	200 to 480 °C
<b>Temperature stability</b>	+/- 1°C
<b>Temperature setting lock type</b>	Dial screw type
<b>Station</b>	
<b>Voltage</b>	26V
<b>Dimensions</b>	95(W) x 118(H) x 136(D) mm
<b>Weight (w/o cord)</b>	Approx. 1.3 kg
<b>Iron</b>	
<b>Power Consumption</b>	65W (26V)
<b>Resistance between tip and ground</b>	< 2 ohm
<b>Tip to ground potential</b>	< 2mV
<b>Cord</b>	1.2 m
<b>Total length (w/o cord)</b>	190 mm
<b>Weight (w/o cord)</b>	44 g
<b>Iron Holder</b>	Blue & yellow

# T18 Series Soldering Tips

Unit : mm

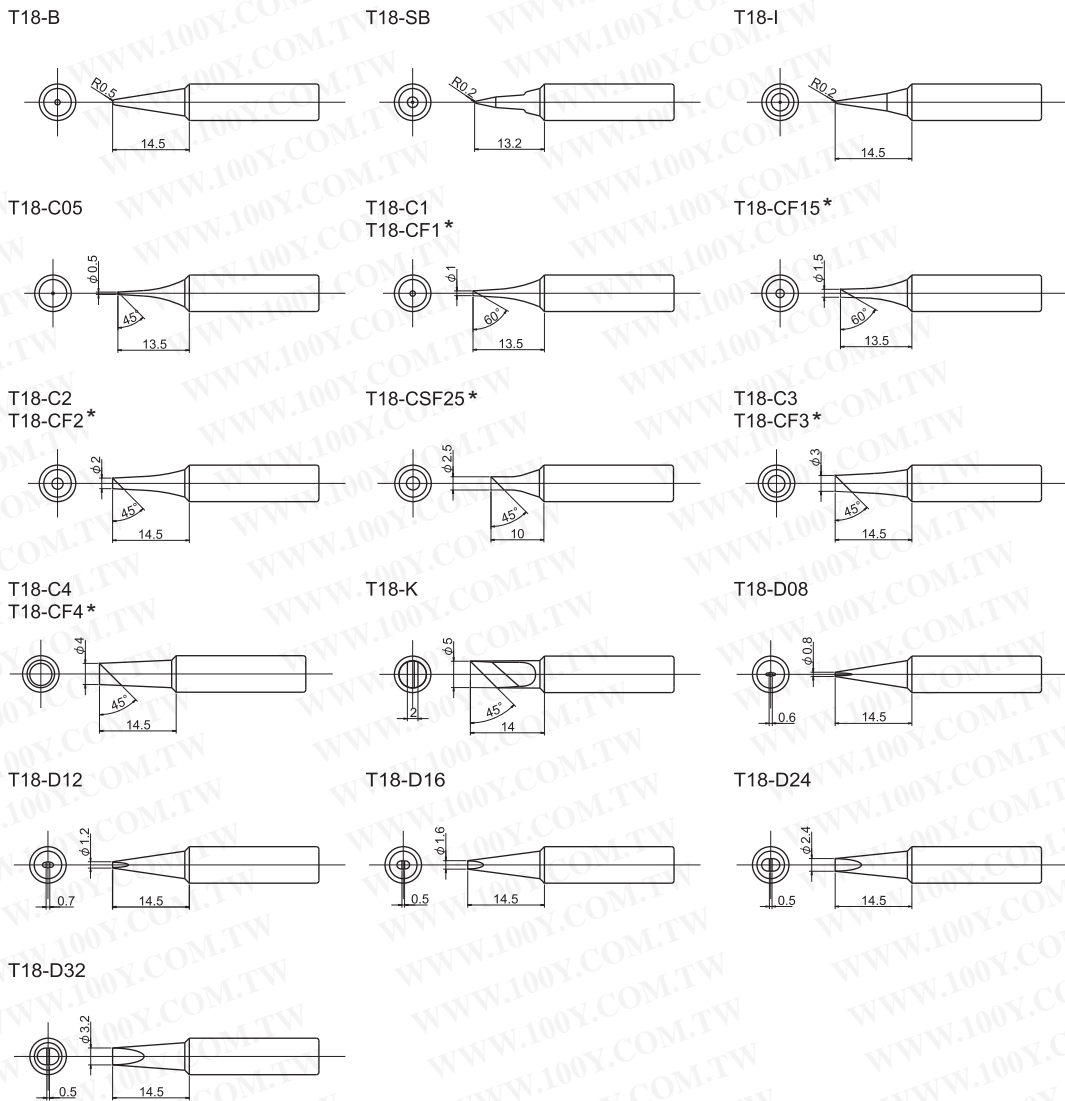

\*Tinned on the soldering surface only.

\*Be sure to choose from among these designated tips.

Otherwise, the results may not be as indicated in the specifications.

**勝特力材料 886-3-5753170**  
**勝特力电子(上海) 86-21-34970699**  
**勝特力电子(深圳) 86-755-83298787**  
[Http://www.100y.com.tw](http://www.100y.com.tw)