

Si photodiode S9702

RGB color sensor

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



S9702 is a color sensor molded into a plastic package having a 3-channel (RGB) photodiode sensitive to the blue ($\lambda_p=460$ nm), green ($\lambda_p=540$ nm) and red ($\lambda_p=620$ nm) regions of the spectrum. S9702 has a 3-segment (RGB) active area of $\square 1$ mm. When compared to the previous model (S9032-02), S9702 is significantly miniaturized (package size 55 % less in cubic volume, PC board mount space 43 % less in area).

Features

- 3-channel (R, G, B) Si photodiode
- Surface-mount small plastic package
- Spectral response range close to the human eye sensitivity
- No sensitivity in the near IR region
- Active area: 3-segment (RGB) active area of $\square 1$ mm

Applications

- Portable or mobile equipment
- RGB-LCD backlight monitors
- Detectors for various light sources
- Color detection


Absolute maximum ratings

Parameter	Symbol	Value	Unit
Reverse voltage	V_R Max	10	V
Operating temperature	T_{opr}	-25 to +85	°C
Storage temperature	T_{stg}	-40 to +100	°C

Electrical and optical characteristics ($T_a = 25^\circ\text{C}$, per element)


Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Spectral response range	λ	Blue	-	400 to 540	-	nm
		Green	-	480 to 600	-	
		Red	-	590 to 720	-	
Peak sensitivity wavelength	λ_p	Blue	-	460	-	nm
		Green	-	540	-	
		Red	-	620	-	
Photo sensitivity	S	$\lambda = \lambda_p$	Blue	0.13	0.18	A/W
		Green	0.18	0.23	-	
		Red	0.11	0.16	-	
Dark current	I_D	$V_R = 1$ V All elements	-	1	50	pA
Temperature coefficient of I_D	T_{CID}		-	1.12	-	times/°C
Rise time	t_r	$V_R = 0$ V, $R_L = 1$ k Ω 10 to 90 %	-	0.1	-	μ s
Terminal capacitance	C_t	$V_R = 0$ V, $f = 10$ kHz	-	12	25	pF

■ Spectral response

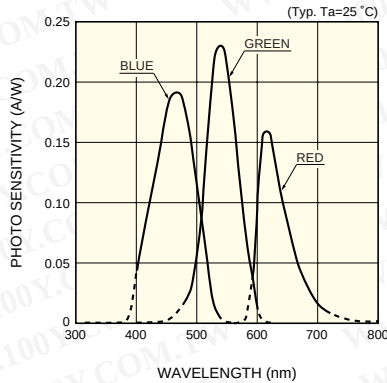


KSPDB0246EA

■ Dark current vs. reverse voltage

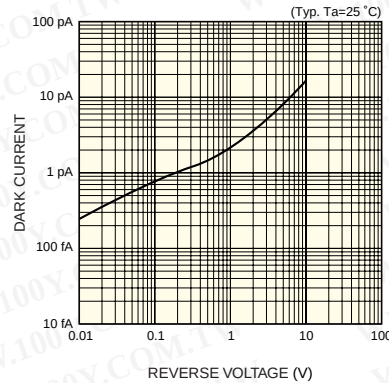



KSPDB0252EA

■ Terminal capacitance vs. reverse voltage

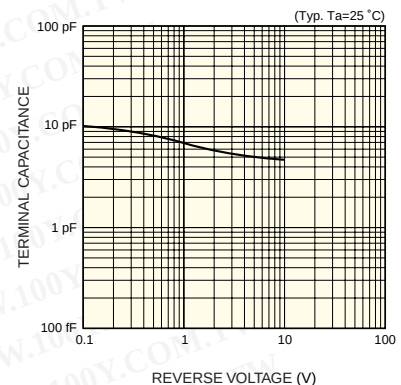

KSPDB0253EA

■ Dimensional outline (unit: mm)

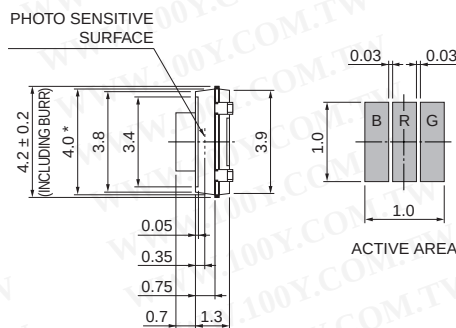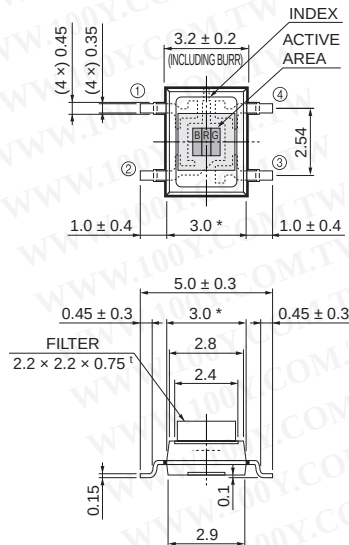

- ① ANODE (BLUE)
- ② CATHODE (COMMON)
- ③ ANODE (RED)
- ④ ANODE (GREEN)

Tolerance unless otherwise noted: ±0.1, ±2°
Shaded area indicates burr.

Chip position accuracy with respect to the package dimensions marked *
X, Y ≤ 0.2, θ ≤ 2°

KSPDA0170EA

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

HAMAMATSU

HAMAMATSU PHOTONICS K.K., Solid State Division

1126-1 Ichino-cho, Hamamatsu City, 435-8558 Japan, Telephone: (81) 053-434-3311, Fax: (81) 053-434-5184, www.hamamatsu.com

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, P.O.Box 6910, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1) 908-231-0960, Fax: (1) 908-231-1218

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49) 08152-3750, Fax: (49) 08152-2658

France: Hamamatsu Photonics France S.A.R.L.: 19, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: 33-(1) 69 53 71 00, Fax: 33-(1) 69 53 71 10

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44) 1707-294888, Fax: (44) 1707-325777

North Europe: Hamamatsu Photonics Norden AB: Smidesvägen 12, SE-171 41 Solna, Sweden, Telephone: (46) 8-509-031-00, Fax: (46) 8-509-031-01

Italy: Hamamatsu Photonics Italia S.R.L.: Strada della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39) 02-935-81-733, Fax: (39) 02-935-81-741