




FREQUENCY RESPONSE

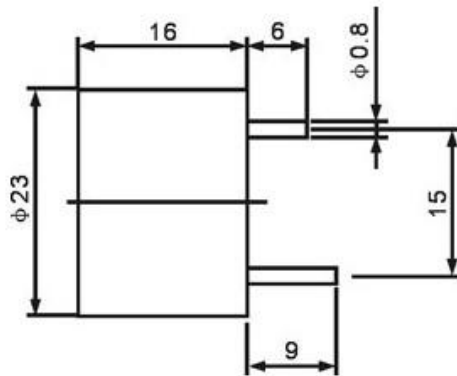

SPECIFICATIONS

Type	Unit	HYD-2316
Rated Voltage(Square Wave)	V	12
Operating Voltage	V	3-24
*Rated Current(MAX)	mA	15
*Min Sound Output at 10 cm	dB	85
*Resonant Frequency	Hz	4500±500
Operating Temperature	℃	-20~+60
Storage Temperature	℃	-30~+70
Housing Material		ABS
Weight	g	8

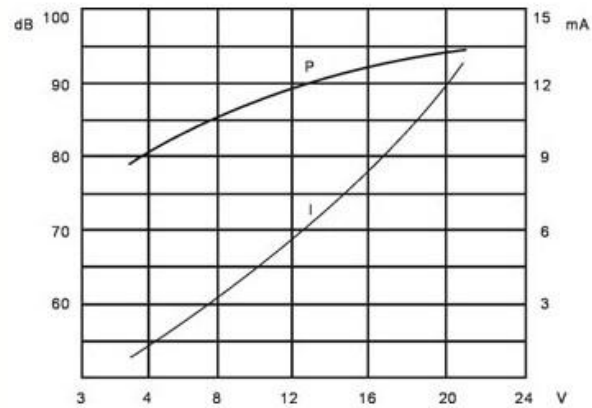