

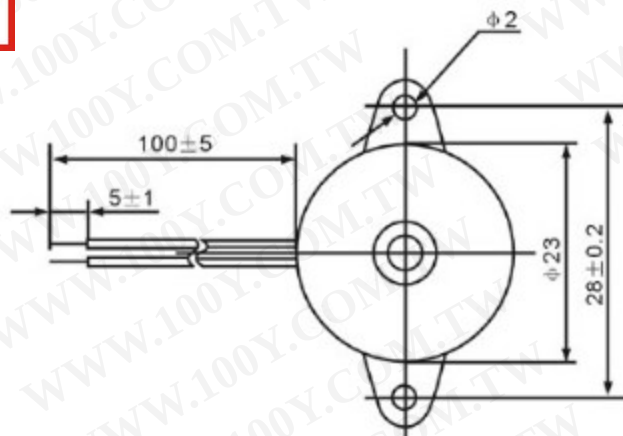




勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



FREQUENCY RESPONSE

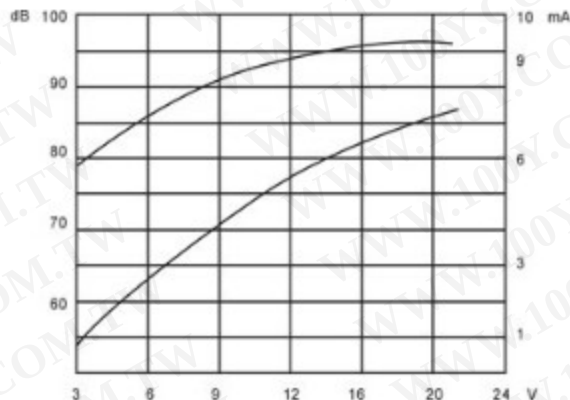

SPECIFICATIONS

Type	Unit	HYD-2316L
Rated Voltage(Square Wave)	V	12
Operating Voltage	V	3-24
*Rated Current(MAX)	mA	8
*Min Sound Output at 10 cm	dB	90
*Resonant Frequency	Hz	3700 ± 500
Operating Temperature	℃	-20~+60
Storage Temperature	℃	-30~+70
Housing Material		ABS
Weight	g	5

FREQUENCY RESPONSE

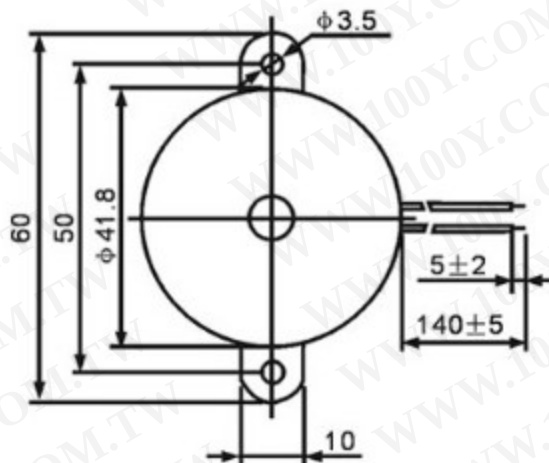
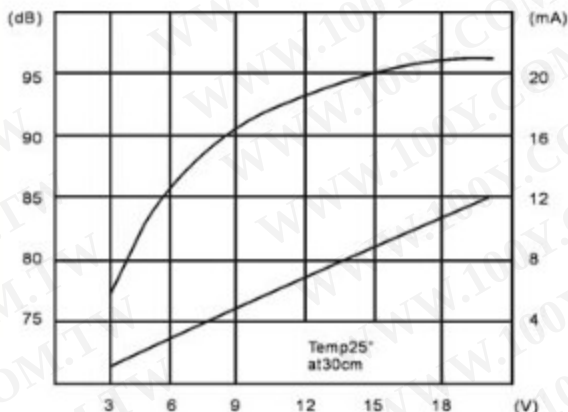


SPECIFICATIONS

Type	Unit	HYD-4216W			
Rated Voltage (Square Wave)	V	12	24	36	48
Operating Voltage	V	8-15	20-26	30-38	42-50
*Rated Current (MAX)	mA	11	24	39	51
*Min Sound Output at 10 cm	dB	90	90	90	95
*Resonant Frequency	Hz	2700 ± 500			
Operating Temperature	°C	-20 ~ +80			
Weight	g	12			



FREQUENCY RESPONSE

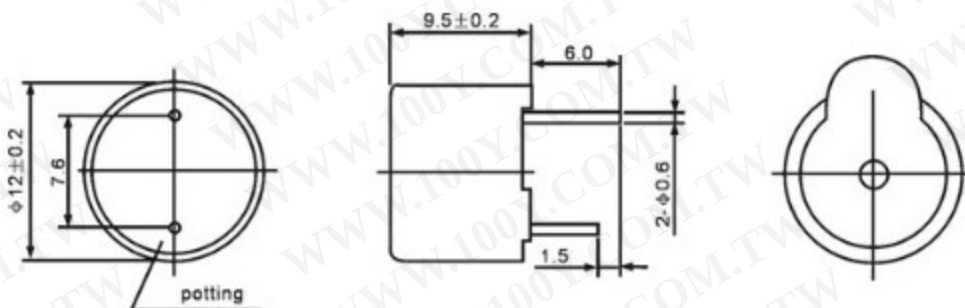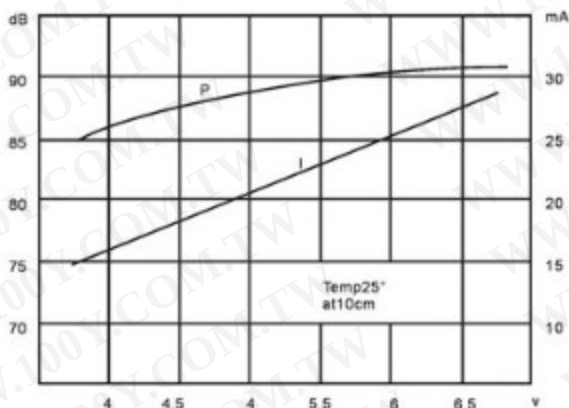

SPECIFICATIONS

Type	Unit	HYT-1201	HYT-1203	HYT-1205	HYT-1212
Rated Voltage	V	1.5	3	5	12
Operating Voltage	V	1.2-3	2-5	4-7	8-16
*Rated Current (MAX)	mA	20	30	30	30
*Min Sound Output at 10 cm	dB	80	85	85	85
*Resonant Frequency	Hz	2300 ± 300			
Operating Temperature	℃	-20 ~ +70			
Storage Temperature	℃	-30 ~ +85			
Housing Material		NORYL			
Weight	g	2			