
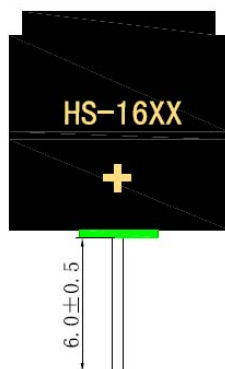

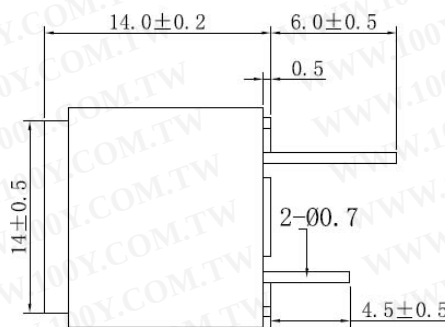



HS-1612 電磁式蜂鳴器 (外激式)

Rated Voltage(Vp-p)	12
Operating Voltage(Vp-p)	8 ~ 16
CurrentConsumption Max (mA)	50
SPL Min. (dB) at 10cm	90
Resonant Frequency(Hz)	2048±300
Coil Impedance(Ω)	115±10
Operating Temperature(°C)	-30~+85
Storage Temperature(°C)	-40~+90
Tone	
Material	PPO

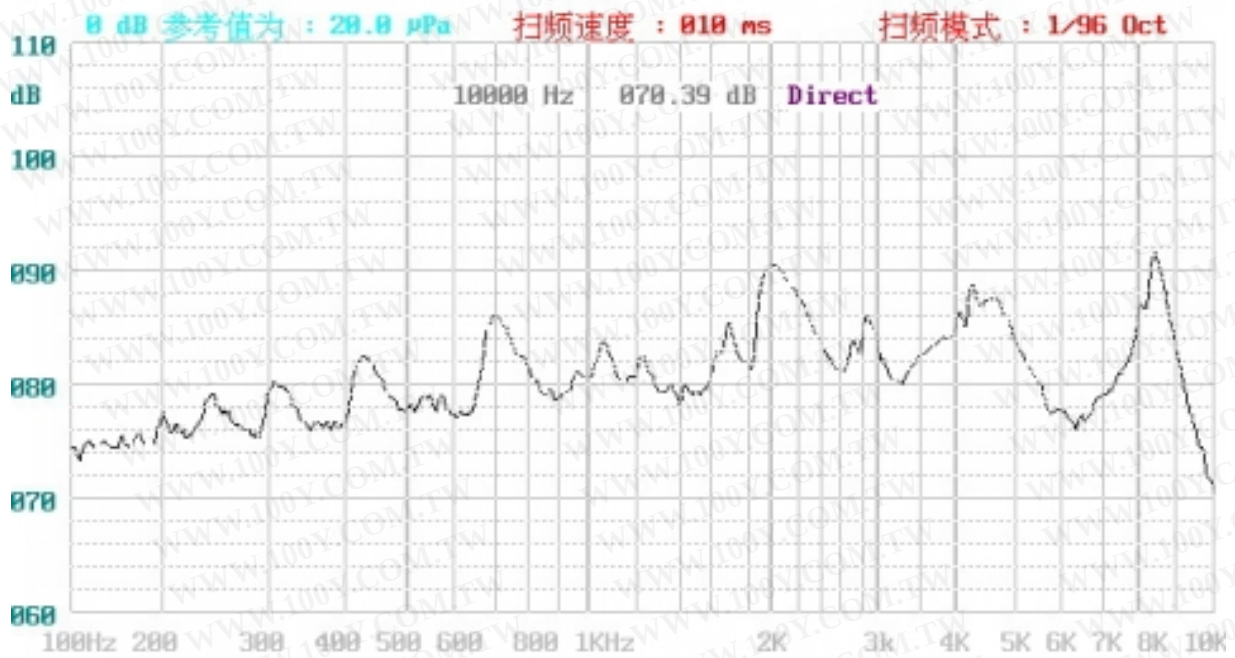

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)