

Mini Series



2RM ϕ 5.5mm ,6mm long

Temperature Rating

Storage : -40℃ to + 115℃

Operate : -30℃ to + 85℃

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


Note1: UL497B Recognized, File E223314

Note2:	DC Breakdown	DC Measuring
	Voltage	Voltage
	70-90V	50V
	120-400V	100V
	470-800V	250V

Dimensions

Unit: mm

Item	Dimensions
D	5.5+0.3,-0.5
T	6.0+0.3,-0.5
d	0.8±0.05
L	20min.

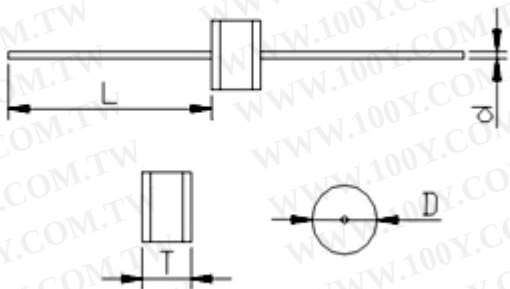

Model No.	DC Breakdown Voltage(V) 100V/s	Maximum Impulse Breakdown Voltage (V)		Maximum Impulse Discharge Current (8/20μs) (KA)		Normal Alternating Discharge Current (A)		Impulse Life (10/1000us) (100A) times	DC Holdover Voltage (V) <150ms	Minimum Insulation Resistance (GΩ) Note 1	Maximum Capacitance (pf) 1MHZ	
		100V/μs	1000V/μs	1 times	10 times	50Hz, 1sec	Single 9cycles					
2RM-70	70±20%	700	800	10	5	5	15	500	52	1	1	
2RM-75	75±20%	700	800	10	5	5	15	500	52	1	1	
2RM-90	90±20%	600	700	10	5	5	15	500	52	1	1	
2RM-120	120±20%	600	700	10	5	5	15	500	52	1	1	
2RM-130	130±20%	600	700	10	5	5	15	500	52	1	1	
2RM-145	145±20%	600	700	10	5	5	15	500	52	1	1	
2RM-230	230±20%	600	700	10	5	5	15	500	80	1	1	
2RM-250	250±20%	600	700	10	5	5	15	500	80	1	1	
2RM-300	300±20%	700	900	10	5	5	15	500	150	1	1	
2RM-350	350±20%	700	900	10	5	5	15	500	150	1	1	
2RM-400	400±20%	800	1000	10	5	5	15	500	150	1	1	
2RM-470	470±20%	900	1100	10	5	5	15	500	150	1	1	
2RM-600	600±20%	1300	1500	2	2.5	2.5	5	500	150	1	1	
2RM-800	800±20%	1500	1700	5	2.5	2.5	5	500	150	1	1	

勝 特 力 材 料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)