




QS9000 & ISO14001 & TS16949

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

PBY321611T Series Specification

1 Scope: This specification applies to MUTILAYER FERRITE CHIP BEADS

2 Part Numbering: Product Identification

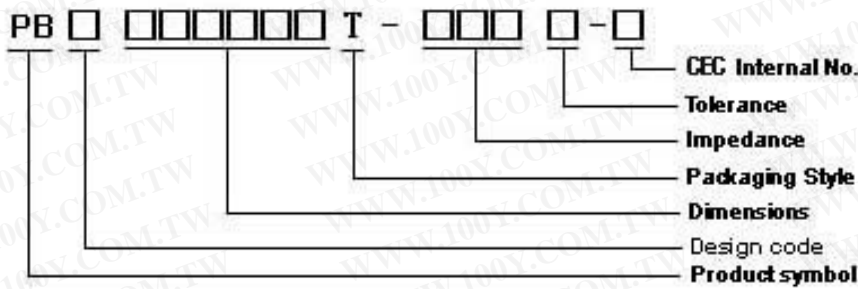

3 Rating:

Operating Temperature: $-55^{\circ}\text{C} \sim 125^{\circ}\text{C}$

Storage Temperature: Under 25°C , Humidity 40%~65%

4 Marking:




5 Standard Testing Condition

	Unless otherwise specified	In case of doubt
Temperature	Ordinary Temperature(15 to 35°C)	20±2°C
Humidity	Ordinary Humidity(25 to 85% RH)	60 to 70 % RH

PBY321611T Series Specification

6 Configuration and Dimensions:



Dimensions in mm


TYPE	PB321611
A	3.2±0.20
B	1.6±0.20
C	1.1±0.20
D	0.5±0.30

7 ELECTRICAL CHARACTERISTICS :

Part No.	Impedance (Ω)	Test Freq. (MHZ)	RDC (Ω)Max.	Rated Current (mA)Max.
PBY321611T-070T-N	7	100 MHZ,200 mV	0.015	6000
PBY321611T-080□-N	8	100 MHZ,200 mV	0.015	6000
PBY321611T-100□-N	10	100 MHZ,200 mV	0.015	6000
PBY321611T-110□-N	11	100 MHZ,200 mV	0.015	6000
PBY321611T-150□-N	15	100 MHZ,200 mV	0.015	6000
PBY321611T-190□-N	19	100 MHZ,200 mV	0.015	6000
PBY321611T-260□-N	26	100 MHZ,200 mV	0.015	6000
PBY321611T-300□-N	30	100 MHZ,200 mV	0.015	4000
PBY321611T-310□-N	31	100 MHZ,200 mV	0.015	4000
PBY321611T-320□-N	32	100 MHZ,200 mV	0.015	4000
PBY321611T-350□-N	35	100 MHZ,200 mV	0.015	4000
PBY321611T-400□-N	40	100 MHZ,200 mV	0.015	4000
PBY321611T-420□-N	42	100 MHZ,200 mV	0.015	4000
PBY321611T-480□-N	48	100 MHZ,200 mV	0.02	4000
PBY321611T-500□-N	50	100 MHZ,200 mV	0.02	4000
PBY321611T-520□-N	52	100 MHZ,200 mV	0.02	4000
PBY321611T-600□-N	60	100 MHZ,200 mV	0.02	4000
PBY321611T-680□-N	68	100 MHZ,200 mV	0.02	4000
PBY321611T-700□-N	70	100 MHZ,200 mV	0.02	4000
PBY321611T-750□-N	75	100 MHZ,200 mV	0.025	3000
PBY321611T-800□-N	80	100 MHZ,200 mV	0.025	3000
PBY321611T-900□-N	90	100 MHZ,200 mV	0.03	3000
PBY321611T-101□-N	100	100 MHZ,200 mV	0.03	3000
PBY321611T-121□-N	120	100 MHZ,200 mV	0.03	3000
PBY321611T-151□-N	150	100 MHZ,200 mV	0.04	2000

NOTE: □-tolerance Y=±25% / T=±30%

1. Operating temperature range - 5 5℃ ~ 1 2 5℃
 2. Rate Current : Applied the current to coils, the temperature rise shall not be more than 30℃
 3. As for PB/UPB type. Rated Current is derated as left figure depending on the operating temperature.
- "-N" FOR COMPLETELY LEAD FREE TYPE(INCLUDING FERRITE BODY & SOLDER)





QS9000 & ISO14001 & TS16949

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


PBY321611T Series Specification

Part No.	Impedance (Ω)	Test Freq. (MHZ)	RDC (Ω)Max.	Rated Current (mA)Max.
PBY321611T-201□-N	200	100 MHZ,200 mV	0.05	2000
PBY321611T-221□-N	220	100 MHZ,200 mV	0.05	2000
PBY321611T-301□-N	300	100 MHZ,200 mV	0.06	2000
PBY321611T-331□-N	330	100 MHZ,200 mV	0.06	2000
PBY321611T-391□-N	390	100 MHZ,200 mV	0.06	2000
PBY321611T-401□-N	400	100 MHZ,200 mV	0.1	2000
PBY321611T-501□-N	500	100 MHZ,200 mV	0.1	2000
PBY321611T-601□-N	600	100 MHZ,200 mV	0.1	2000
PBY321611T-102□-N	1000	50 MHZ,200 mV	0.15	1200
PBY321611T-122□-N	1200	50 MHZ,200 mV	0.18	1000
PBY321611T-152□-N	1500	50 MHZ,200 mV	0.2	800

PBY321611T Series Specification

8 PBY321611T Series

8.1 Construction:

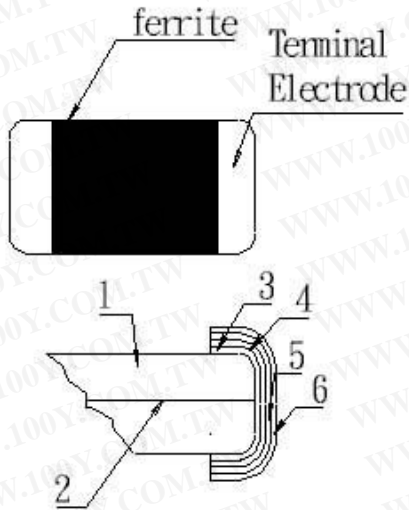


8.2 Material List:

NO	PART	MATERIAL
1	Ferrite Substance	NiO-CuO-ZnO-Ferrite
2	Silver electrode	Ag
3	Silver electrode	Ag
4	Cu plating	Cu
5	Ni plating	Ni
6	Sn plating	Sn

PBY321611T Series Specification

9 Reliability Of Ferrite Multilayer Chip Bead

1-1.Mechanical Performance

No	Item	Specification	Test Method
1-1-1	Flexure Strength	The forces applied on the right conditions must not damage the terminal electrode and the ferrite	Test device shall be soldered on the substrate Substrate Dimension: 100x40x1.6mm Deflection: 2.0mm Keeping Time: 30sec *For 100505, substrate dimension is 100x40x0.8mm
1-1-2	Vibration		Test device shall be soldered on the substrate Oscillation Frequency: 10 to 55 to 10Hz for 1min Amplitude: 1.5mm Time: 2hrs for each axis (X, Y & Z), total 6hrs
1-1-3	Resistance to Soldering Heat	Appearance: No damage More than 75% of the terminal electrode should be covered with solder. Impedance : within $\pm 30\%$ of initial value	Pre-heating: 150°C, 1min Solder Composition: Sn/Pb = 63/37 Solder Composition: Sn/Ag3.0/Cu0.5(Pb-Free) Solder Temperature: 260 \pm 5°C Immersion Time: 10 \pm 1sec
1-1-4	Solder ability	The electrodes shall be at least 90% covered with new solder coating	Pre-heating: 150°C, 1min Solder Composition: Sn/Pb = 63/37 Solder Temperature: 220 \pm 5°C Solder Composition: Sn/Ag3.0/Cu0.5(Pb-Free) Solder Temperature: 245 \pm 5°C (Pb-Free) Immersion Time: 4 \pm 1sec
1-1-5	Terminal Strength Test	100505 series : ≥ 0.2 kg 160808 series : ≥ 0.5 kg 201209 series : ≥ 1.0 kg other series : ≥ 2.0 kg BAY/BAQ321609 series : ≥ 1.5 kg (Push)	Test device shall be soldered on the substrate 

1-2.Environmental Performance


No	Item	Specification	Test Method		
1-2-1	Temperature Cycle	Appearance: No damage Impedance: within $\pm 30\%$ of initial value	One cycle:		
			Step	Temperature (°C)	Time (min)
			1	-55 \pm 3	30
			2	25 \pm 2	3
			3	125 \pm 3	30
4	25 \pm 2	3			
			Total: 100cycles		
			Measured after exposure in the room condition for 24hrs		
1-2-2	Humidity Resistance		Temperature: 40 \pm 2°C Relative Humidity: 90 ~ 95% / Time: 1000hrs Measured after exposure in the room condition for 24hrs		
1-2-3	High Temperature Resistance		Temperature: 125 \pm 3°C / Relative Humidity: 0% Applied Current: Rated Current /Time: 1000hrs Measured after exposure in the room condition for 24hrs		
1-2-4	Low Temperature Resistance		Temperature: -55 \pm 3°C Relative Humidity: 0% / Time: 1000hrs Measured after exposure in the room condition for 24hrs		



QS9000 & ISO14001 & TS16949

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
 Http://www.100y.com.tw

PBY321611T Series Specification

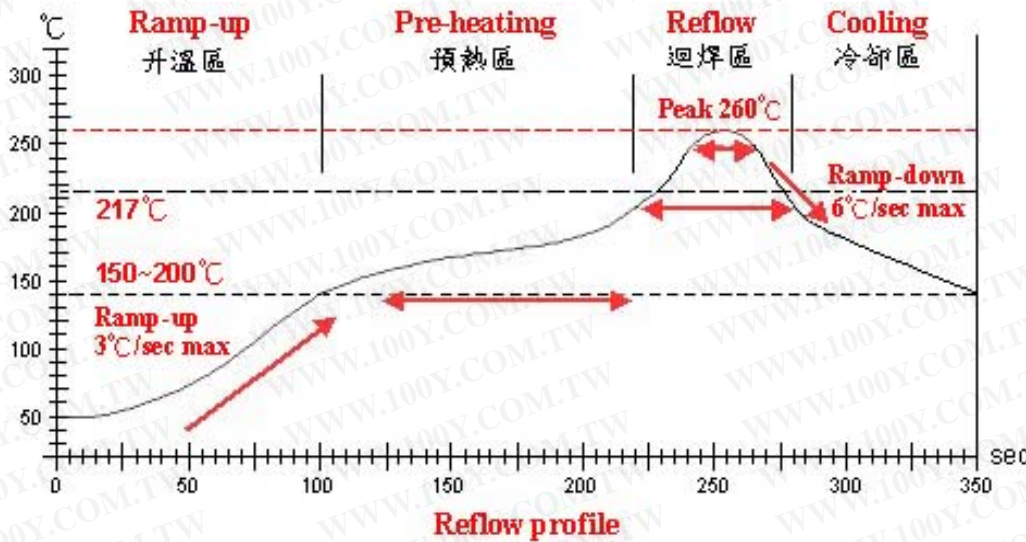

Lead-Free(LF) 標準溫度分析範圍

Refer to J-STD-020C

管制項目 Item.	升温區 Ramp-up	預熱區 Pre-heating	迴焊區 Reflow	Peak Temp	冷卻區 Cooling
溫度範圍 Temp.scope	R.T. ~ 150°C	150°C ~ 200°C	217°C	260±5°C	Peak Temp. ~ 150°C
標準時間 Time spec.	—	60 ~ 180 sec	60 ~ 150sec	20 ~ 40 sec	—
實際時間 Time result	—	75 ~ 100 sec	90 ~ 120sec	20 ~ 35 sec	—

NOTE :

1. Re-flow possible times : within 2 times
2. Nitrogen adopted is recommended while in re-flow



QS9000 & ISO14001 & TS16949

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

PBY321611T Series Specification

10 TEST DATA FOR PREPRODUCTION SAMPLES QF-1419

DESCRIPTION: PBY321611T-310Y-N

MEAS. Item	Z (Ω)	RDC (Ω)	A m/m	B m/m	C m/m	D m/m					
Spec Customer	31±25%										
Suggest		0.015+0	3.2±0.2	1.6±0.2	1.1±0.2	0.5±0.3					
Test Freq. (MHz)	200mV 100										
1	31.9	0.008	3.18	1.56	1.11	0.55					
2	32.8	0.009	3.19	1.57	1.1	0.56					
3	33.6	0.011	3.15	1.58	1.14	0.53					
4	33.3	0.01	3.15	1.57	1.1	0.54					
5	32.6	0.01	3.16	1.59	1.11	0.53					
6	31.5	0.009	3.18	1.58	1.08	0.56					
7	34	0.009	3.17	1.62	1.09	0.52					
8	31.8	0.008	3.19	1.62	1.08	0.54					
9	32.1	0.007	3.2	1.58	1.1	0.55					
10	32.2	0.011	3.21	1.57	1.09	0.55					
11											
12											
13											
14											
15											
X	32.58	0.0092	3.178	1.584	1.1	0.543					
R	2.5	0.004	0.06	0.06	0.06	0.04					
CUSTOMER											
SAMPLE											

TEST INSTRUMENT:
 HP4291A RF IMPEDANCE / MATERIAL ANALYZER FOR Z
 CHEN HWA 502BC / HP4338B FOR RDC

APPEARANCE AND DIMENSIONS :
 SPEC : MEET ITEM 6.
 TEST METHOD : VISUAL INSPECTION AND MEASURED WITH SILDE CALIPERS.


TESTING CONDITIONS :

	Unless otherwise specified	In case of doubt
Temperature	Ordinary Temperature (15 to 35°C)	20 ± 2 °C
Humidity	Ordinary Humidity (25 to 85 %RH)	60 to 70 %RH

PBY321611T Series Specification

11 PACKAGING

11.1 Packaging -Cover tape

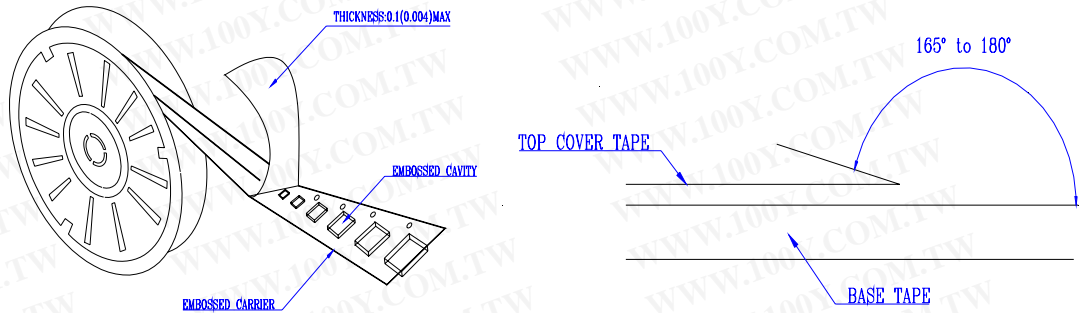


The force for tearing off cover tape is 10 to 60 grams in the arrow direction.

11.2 Packaging Quantity

TYPE	BULK	CHIP / REEL
PB100505	✓	10000
PB160808	✓	4000
PB201209	✓	4000
PB321611	✓	3000
PB321616	✓	2000
PB322513	✓	2500
PB451616	✓	2000
PB453215	✓	1000

11.3 Reel Dimensions

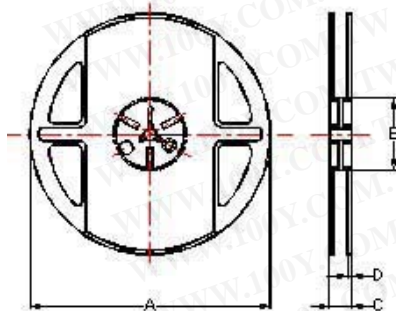


Dimensions in mm

TYPE	A	B	C	D
PB100505	178	60	10	2
PB160808	178	60	10	2
PB201209	178	60	10	2
PB321611	178	60	10	2
PB321616	178	60	10	2
PB322513	178	60	10	2
PB451616	178	60	14	2
PB453215	178	60	14	2

PBY321611T Series Specification


11 PACKAGING

11.4 Tape Dimensions in mm

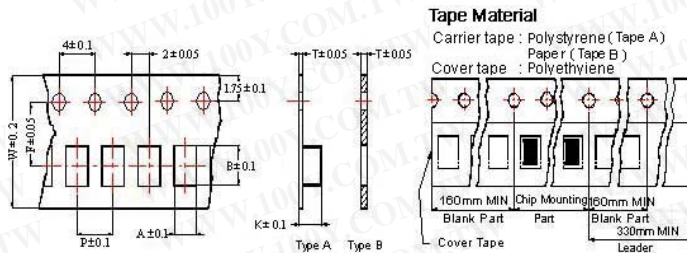

TYPE	A	B	T	W	P	F	K	Tape Typ.
PB100505	0.65	1.15	0.60	8	2	3.5		B
PB160808	1.10	1.85	0.95	8	4	3.5		B
PB201209	1.50	2.30	0.97	8	4	3.5		B
PB321611	1.88	3.50	0.22	8	4	3.5	1.27	A
PB322513	2.77	3.42	0.22	8	4	3.5	1.55	A
PB451616	1.93	4.95	0.24	12	4	5.5	1.93	A
PB453215	3.66	4.95	0.24	12	8	5.5	1.85	A

12 Recommended Pattern

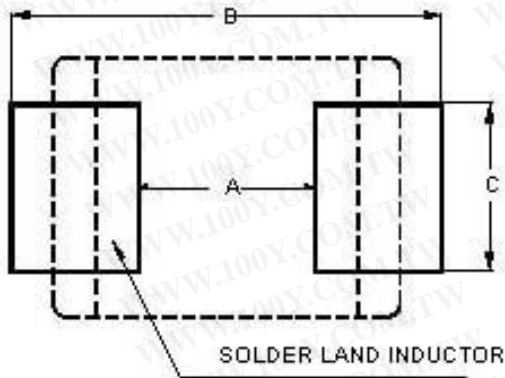

Dimensions in mm

TYPE	A	B	C
PB100505	0.4	1.2 ~ 1.4	0.4
PB160808	0.8	2.4 ~ 3.4	0.6
PB201209	1.2	3.0 ~ 4.0	1
PB321611	2	4.2 ~ 5.2	1.2
PB322513	2	5.5 ~ 6.5	1.8
PB451616	3	5.5 ~ 6.5	1.2
PB453215	3	5.5 ~ 6.5	2.4

13 Note:

1. Please make sure that your product is has been evaluated and confirmed against your specifications when our product is mounted to your product.
2. Do not knock nor drop.
3. All the items and parameters in this product specification have been prescribed on the premise that our product is used for the purpose, under the condition and in the environment agreed upon between you and us. You are requested not to use our product deviating from such agreement.
4. Please keep the distance between transformer/coil and other components (refer to the standard IEC 950)



QS9000 & ISO14001 & TS16949

勝特力材料 886-3-5753170

勝特力电子(上海) 86-21-54151736

勝特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

PBY321611T Series Specification

14 Curve:

