

AC Filter Cost Optimized

Standard- or Medical-Filter



勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
 Http://www.100y.com.tw

**Description**

- Chassis:
 - Screw-on mounting, from top
- Line filter in standard and medical version, 1-stage, standard attenuation
- Quick connect terminals 6.3 x 0.8 mm
- Especially effective against symmetrical interferences in the frequency range from 10kHz up to 30MHz

Approvals

- VDE Certificate Number: 40004673
- UL File Number: E72928

Characteristics

- Designed for universal industrial applications
- High attenuation at maximum resp. asymmetric load independent from the line impedance
- Protection against interference voltage from the mains
- Possible interferences generated in the equipment are strongly attenuated
- Especially designed for industrial applications such as: Frequency Converters, Stepper Motor Drives, UPS-Systems, Inverters
- Qualified for use in equipment according IEC/EN 60950

Other versions on request

- Version with wire connection

References**Weblinks**


[General Product Information](#), [Approvals](#), [RoHS](#), [CHINA-RoHS](#), [Mating Connectors](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [Accessories](#)

Technical Data

Ratings IEC	6 - 20A @ Ta 40 °C / 250 VAC; 50Hz	Line Filter	Standard and Medical Version, IEC 60939, IEC 60601-1, UL 1283, UL 544, EN 133 200, CSA C22.2 no. 8
Ratings UL/CSA	6 - 20A @ Ta 40 °C / 125 VAC; 60Hz		Technical details
Leakage Current	standard < 0.35mA (250V / 60Hz)	MTBF	> 200'000h acc. to MIL-HB-217 F
Dielectric Strength	> 1.7 kVDC between L-N > 2.7 kVDC between L/N-PE Test voltage (2 sec)		
Allowable Operation Temp.	-25 °C to 100 °C		
Climatic Category	25/100/21 acc. to IEC 60068-1		
Protection Class	Suitable for appliances with protection class 1 acc. to IEC 61140		
Terminal	Quick connect terminals 6.3 x 0.8 mm		
Material: Housing	Aluminum		

Dimensions


Case 49

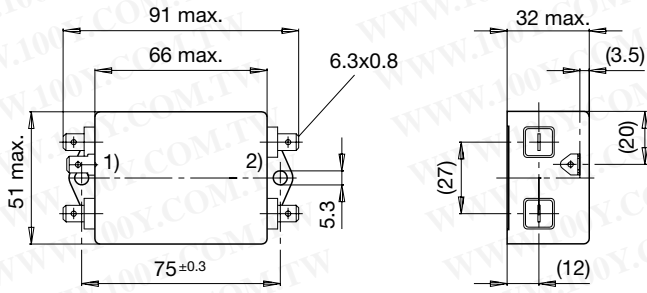

1) Line
2) Load

Diagrams

Standard version



1) Line
2) Load

Attenuation Loss 0.1/100Ω differential mode 100/0.1Ω differential mode - - - differential mode ____ common mode





Standard version

6 A

10 A

16 A

20 A







Medical version (M5)

6 A

10 A

16 A

20 A



Variants

Rated Current [A]	Filter-Type	L [mH]	Cx (X2) [μF]	Cy (Y2) [nF]	Weight [g]	Housing	Order Number
6	Standard Version	2 x 14	0.1	3.3	212	49	5500.2035
10	Standard Version	2 x 5	0.1	3.3	212	49	5500.2036
16	Standard Version	2 x 2	0.1	3.3	208	49	5500.2037
20	Standard Version	2 x 1.5	0.1	3.3	218	49	5500.2038
6	Medical Version (M5)	2 x 14	0.1	-	212	49	5500.2082
10	Medical Version (M5)	2 x 5	0.1	-	212	49	5500.2083
16	Medical Version (M5)	2 x 2	0.1	-	208	49	5500.2084
20	Medical Version (M5)	2 x 1.5	0.1	-	218	49	5500.2085

Packaging unit 10 Pcs

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)