

HMD881J

Diplexer for Wireless LAN (2.4GHz/5GHz)

Characteristics


HMD881J

Zin/Zout	50 ohm Nominal
Fc	Low 2450MHz Nominal
	High 5425MHz Nominal
Pass Band	Low 2400-2500MHz Nominal
	High 4900-5950MHz Nominal
Insertion Loss	Low 0.5 dB max (2400-2500MHz at 25 Deg.C)
	Low 0.7 dB max (2400-2500MHz at -40 up to +85 Deg.C)
	High 0.8 dB max (4900-5950MHz at 25 Deg.C)
	High 1.1 dB max (4900-5950MHz at -40 up to +85 Deg.C)
Ripple	Low 0.3 dB max (2400-2500MHz)
	High 0.5 dB max (4900-5950MHz)
V. S. W. R	Low 2.0 max (2400-2500MHz)
	High 2.0 max (4900-5950MHz)
Attenuation	Low 20 dB min (4800-6000MHz)
	Low 20 dB min (7200-7500MHz)
	High 25 dB min (1800-2500MHz)
	High 25 dB min (9800-11900MHz) Reference

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


Dimensions


Dimensions (Unit : mm)

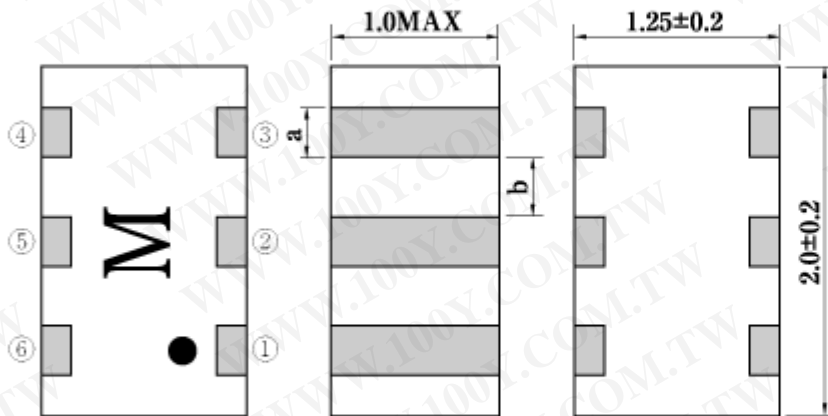


Terminal	
①	Low
②	GND
③	High
④	GND
⑤	Common
⑥	GND

Terminal Dimensions	
a	0.3 ± 0.2
b	0.35 ± 0.2

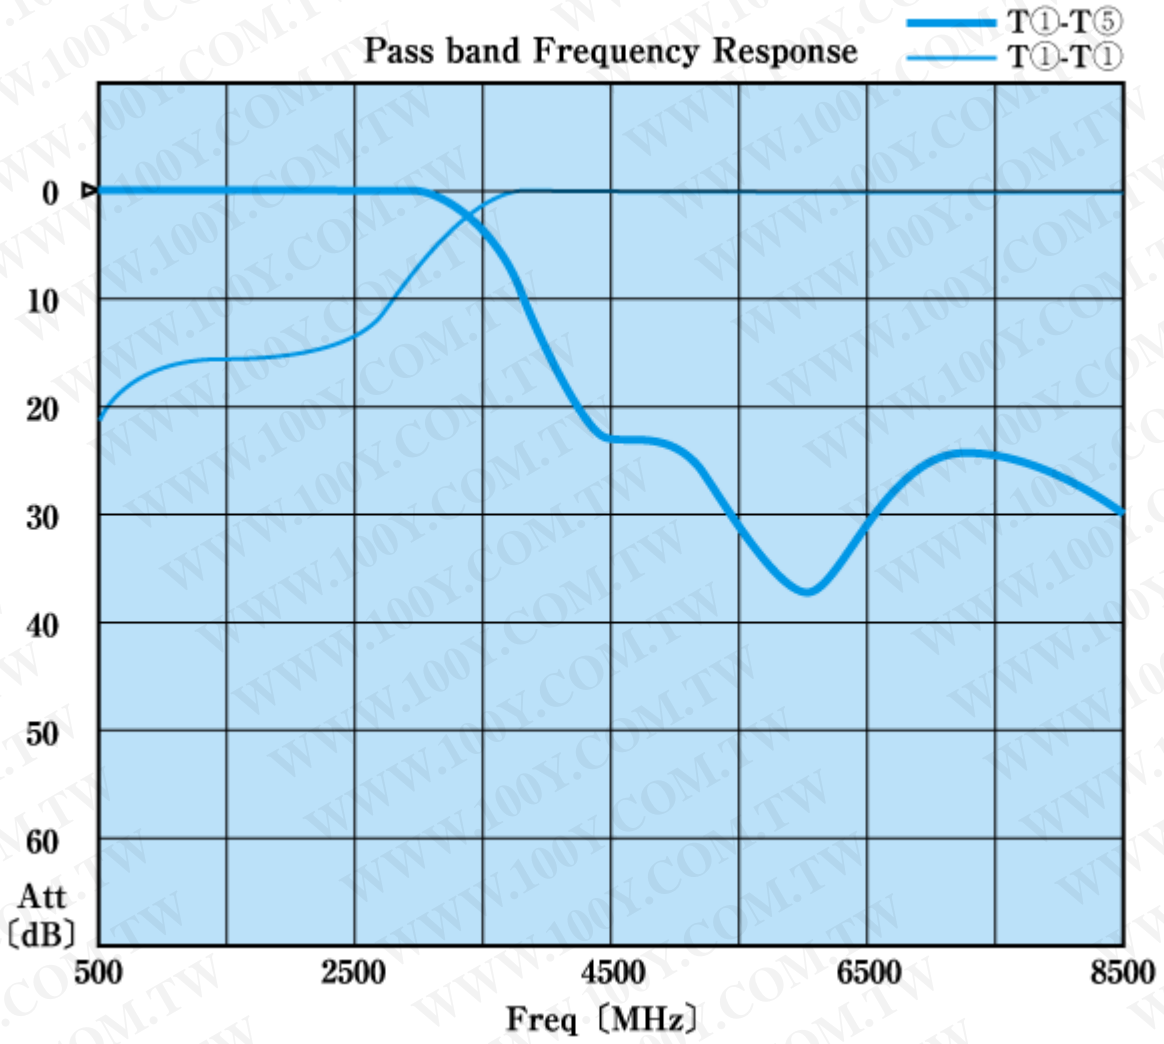

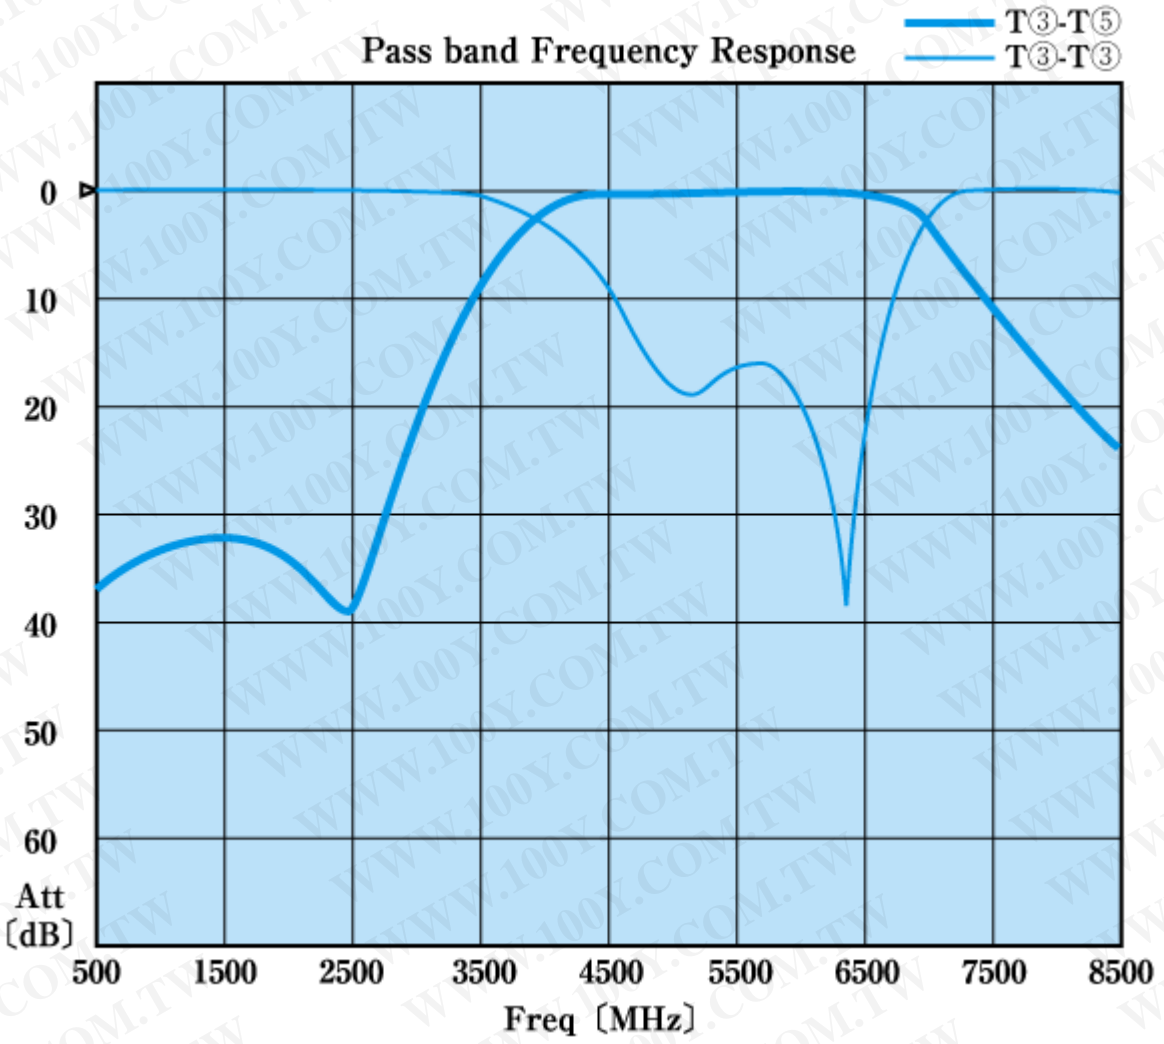

Land pattern

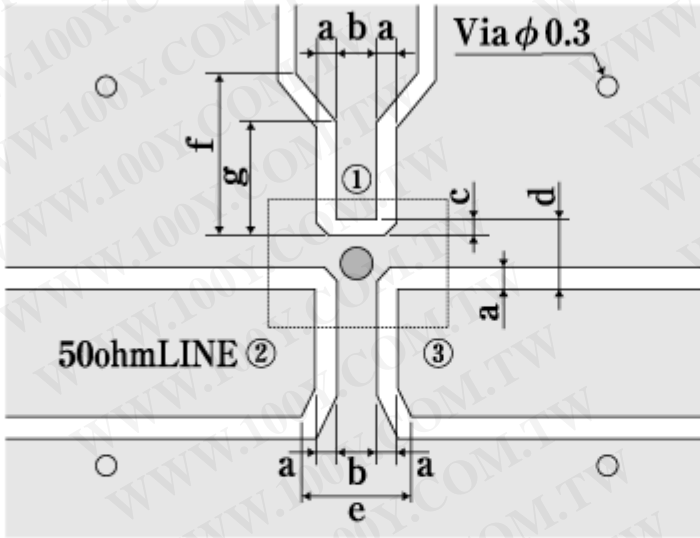


Terminal	
①	Input
②	Output 1
③	Output 2
※	GND

$a=0.3$
 $b=0.4$
 $c=0.2$
 $d=0.8$
 $e=1.39$
 $f=1.9$
 $g=1.5$
 (Unit : mm)

Example : $t=1.0\text{mm}$
 Glass-epoxy board

Resist pattern

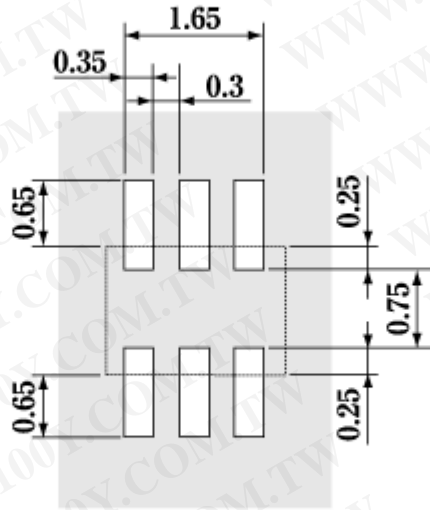

Example : $t=1.0\text{mm}$
Glass-epoxy board

Reel Dimensions

Reel Dimensions (Unit:mm)

