


SMD Power Inductor CDRH6D28




RoHS


Halogen
Free



Dimension - [mm]

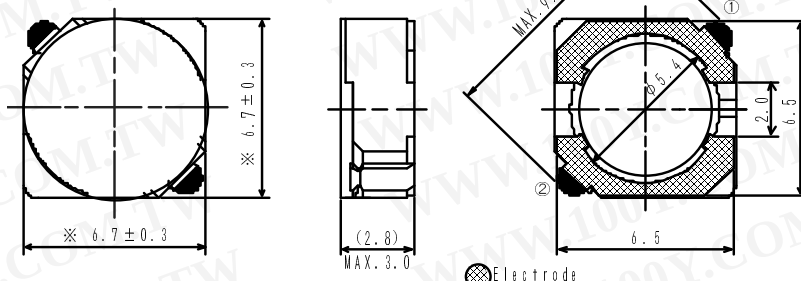

Land pattern and Schematics - [mm]

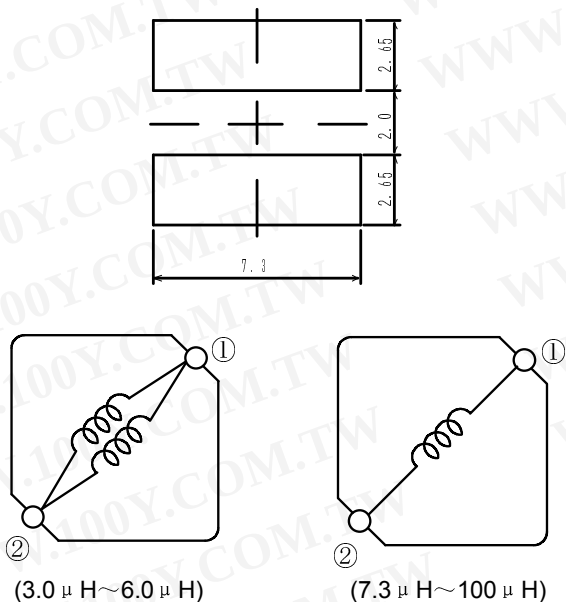

Description

- Ferrite drum core construction.
- Magnetically shielded.
- L × W × H: 7.0 × 7.0 × 3.0 mm Max.
- Product weight: 0.44g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.
- Halogen Free available.

Environmental Data

- Operating temperature range: -40°C~+100°C (including coil's self temperature rise)
- Storage temperature range: -40°C~+100°C
- Solder reflow temperature: 260 °C peak.

Packaging

- Carrier tape and reel packaging
- 13" diameter reel
- 1500pcs per reel

Applications

- Ideally used in MP3, PDA, HDD, DSC/DVC, Notebook PC etc as DC-DC converter inductors.

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

SMD Power Inductor

CDRH6D28



Electrical Characteristics


Part Name	Stamp	Inductance (μ H) [within] ※1	D.C.R.(Ω) Max. (Typ.) (at 20°C)	Rated Current (A) ※2
CDRH6D28NP-3R0NC	3R0	3.0 $\pm$ 30%	24m (18m)	3.00
CDRH6D28NP-3R9NC	3R9	3.9 $\pm$ 30%	27m (20m)	2.60
CDRH6D28NP-5R0NC	5R0	5.0 $\pm$ 30%	31m (23m)	2.40
CDRH6D28NP-6R0NC	6R0	6.0 $\pm$ 30%	35m (26m)	2.25
CDRH6D28NP-7R3NC	7R3	7.3 $\pm$ 30%	54m (40m)	2.10
CDRH6D28NP-8R6NC	8R6	8.6 $\pm$ 30%	58m (43m)	1.85
CDRH6D28NP-100NC	100	10 $\pm$ 30%	65m (48m)	1.70
CDRH6D28NP-120NC	120	12 $\pm$ 30%	70m (52m)	1.55
CDRH6D28NP-150NC	150	15 $\pm$ 30%	84m (62m)	1.40
CDRH6D28NP-180NC	180	18 $\pm$ 30%	95m (70m)	1.32
CDRH6D28NP-220NC	220	22 $\pm$ 30%	128m (95m)	1.20
CDRH6D28NP-270NC	270	27 $\pm$ 30%	142m(105m)	1.05
CDRH6D28NP-330NC	330	33 $\pm$ 30%	165m(122m)	0.97
CDRH6D28NP-390NC	390	39 $\pm$ 30%	210m(156m)	0.86
CDRH6D28NP-470NC	470	47 $\pm$ 30%	238m(176m)	0.80
CDRH6D28NP-560NC	560	56 $\pm$ 30%	277m(205m)	0.73
CDRH6D28NP-680NC	680	68 $\pm$ 30%	304m(225m)	0.65
CDRH6D28NP-820NC	820	82 $\pm$ 30%	390m(290m)	0.60
CDRH6D28NP-101NC	101	100 $\pm$ 30%	535m(397m)	0.54

※1. Inductance measuring condition: at 100kHz.

※2. Rated current: The DC current at which the inductance decreases to 65% of it's nominal value or when $\Delta t=30^{\circ}\text{C}$, whichever is lower ($T_a=20^{\circ}\text{C}$).

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


SMD Power Inductor CDRH6D28



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

Saturation Current & Temperature Rise Graph

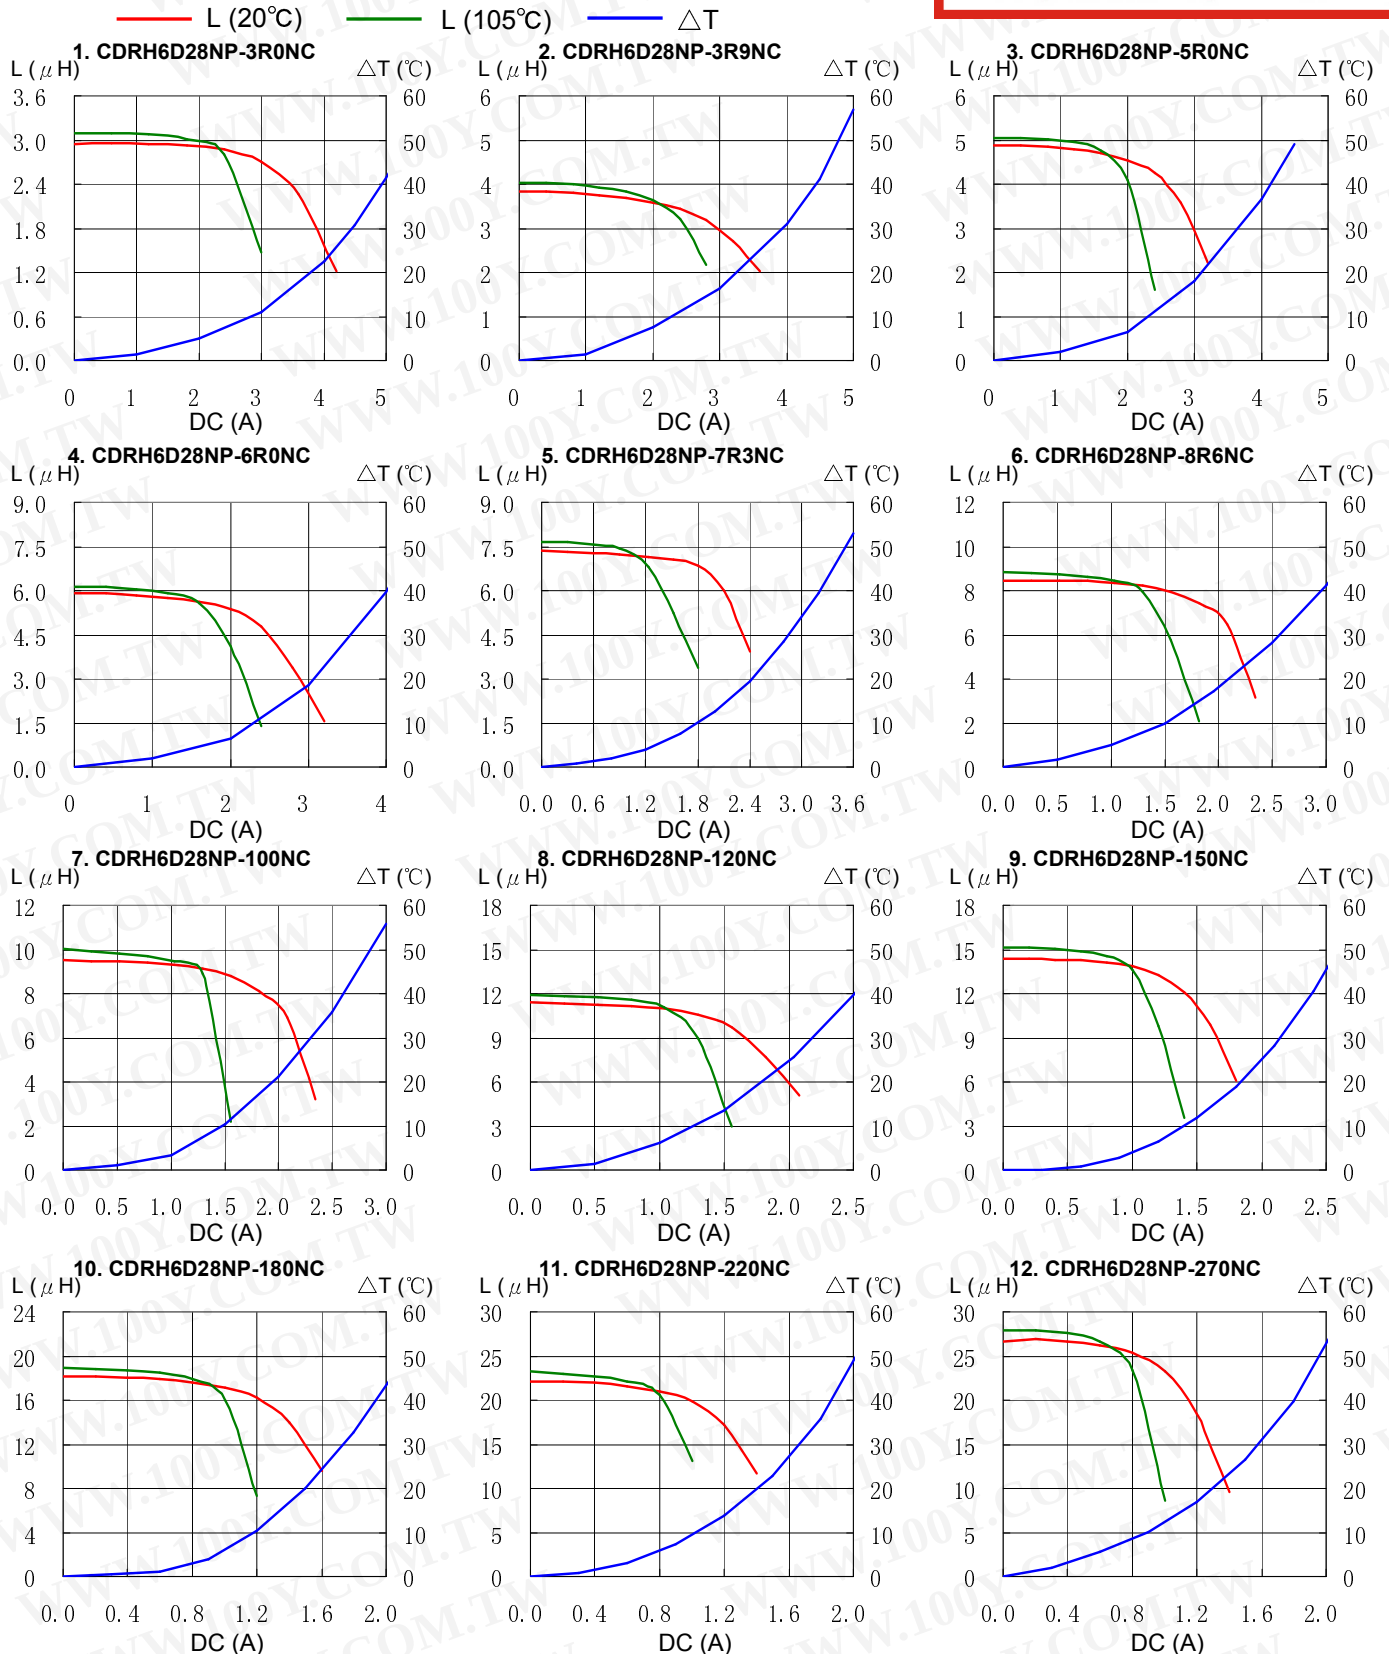


SMD Power Inductor CDRH6D28




Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) — ΔT


13. CDRH6D28NP-330NC

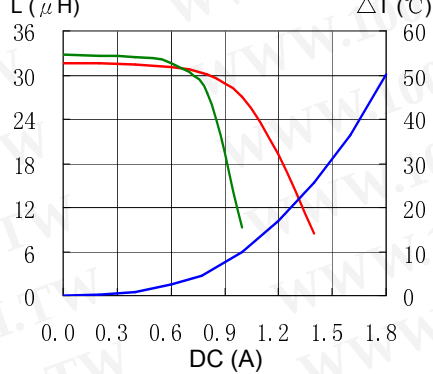


14. CDRH6D28NP-390NC

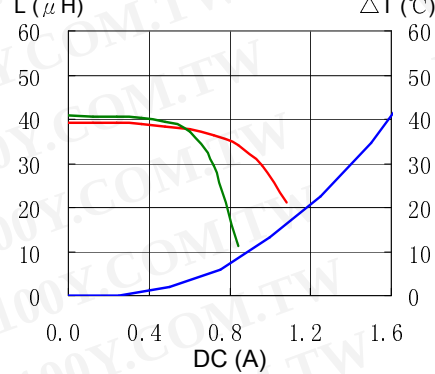


15. CDRH6D28NP-470NC

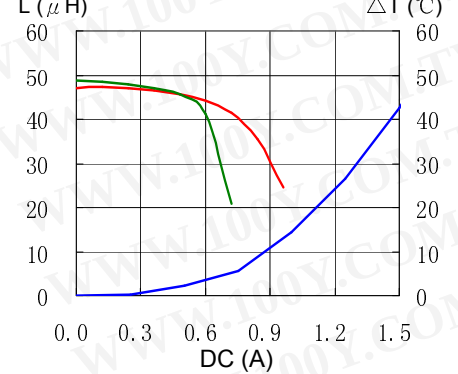


16. CDRH6D28NP-560NC

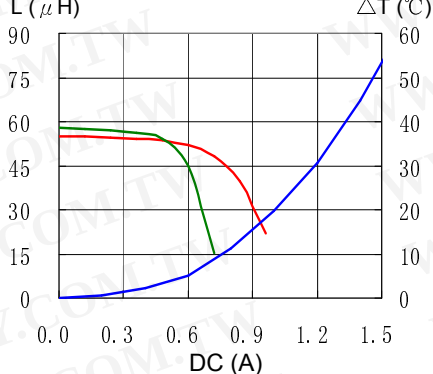


17. CDRH6D28NP-680NC

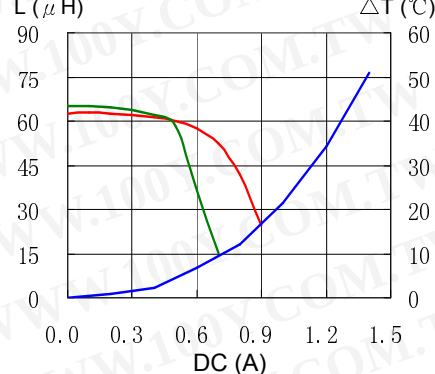

18. CDRH6D28NP-820NC

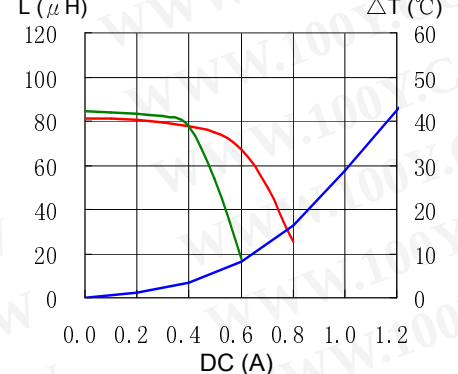

19. CDRH6D28NP-101NC


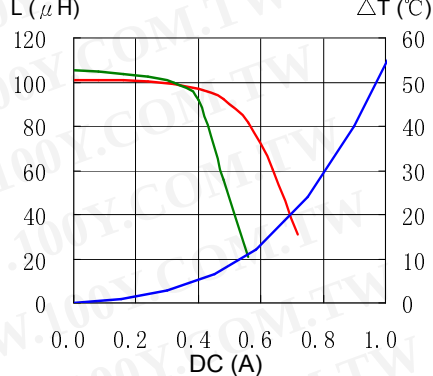


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

SMD Power Inductor CDRH6D28



Solder Reflow Condition

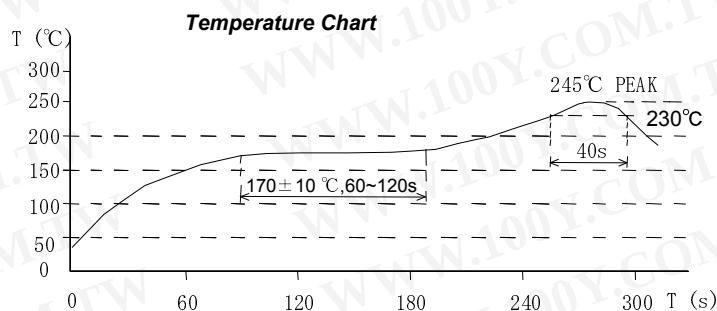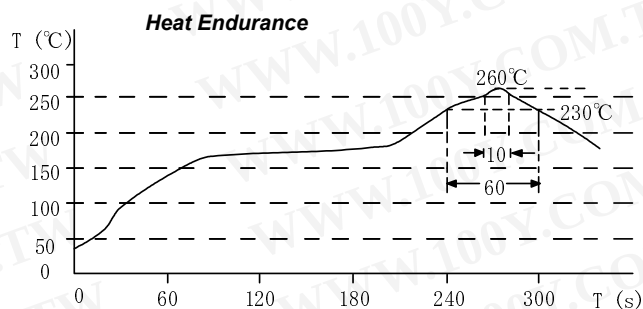

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong

Tel.+852-2880-6781
FAX.+852-2565-9600
sales@hk.sumida.com

Saitama(Japan)

Tel.+81-48-691-7300
FAX.+81-48-691-7340
sales@jp.sumida.com

Chicago

Tel.+1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai

Tel.+86-21-5836-3299
FAX.+86-21-5836-3266
shanghai.sales@cn.sumida.com

Seoul

Tel.+82-2-6237-0777
FAX.+82-2-6237-0778
sales@kr.sumida.com

Obernzell

Tel.+49-8591-937-0
FAX. +49-8591-937-103
contact@eu.sumida.com

Shenzhen

Tel.+86-755-8291-0228
FAX.+86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore

Tel.+65-6296-3388
FAX.+65-6841-4426
sales@sg.sumida.com

Neumarkt

Tel.+49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com

Taipei

Tel.+886-2-8751-2737
FAX.+886-2-8751-2738
sales@tw.sumida.com

San Jose

Tel.+1-408-321-9660
FAX.+1-408-321-9308
sales@us.sumida.com