

SMD INDUCTORS LOW PROFILE TYPE



REFLOW

FEATURES

- Small and Low profile inductor.
- It corresponds to High current.
- Simple and original magnetic shield structure.
- Durable structure against dropping impact.

APPLICATIONS

- For small DC/DC converter (cellular Phone, HDD, DVC, DSC, PDA, LCD display etc).

OPERATING TEMP.

- -25°C~120°C (Including self-generated heat)

ORDERING CODE

1 Type		3 Packaging		4 Nominal inductance (μH)		5 Inductance tolerance		6 Internal code	
NR△	Coating resin specification △=Blank Space	T△	Tape & Reel △=Blank Space	example		M	±20%	△	Standard product △=Blank Space
				2R2	2.2	N	±30%		
				100	10				
				101	100				

※R=decimal point

2 External dimensions (W×L×H)			
3010	3.0×3.0×1.0mm	5040	5.0×5.0×4.0mm
3012	3.0×3.0×1.2mm	6012	6.0×6.0×1.2mm
3015	3.0×3.0×1.5mm	6020	6.0×6.0×2.0mm
4010	4.0×4.0×1.0mm	6028	6.0×6.0×2.8mm
4012	4.0×4.0×1.2mm	6045	6.0×6.0×4.5mm
4018	4.0×4.0×1.8mm	8040	8.0×8.0×4.0mm

EXTERNAL DIMENSIONS/STANDARD QUANTITY

Type	L	W	H	e	f	Standard Quantity [pcs] Tape & Reel
NR3010			1.0 max (0.039 max)			2000
NR3012	3.0±0.1 (0.118±0.004)	3.0±0.1 (0.118±0.004)	1.2 max (0.047 max)	0.9±0.2 (0.035±0.008)	1.9±0.2 (0.075±0.008)	2000
NR3015			1.5 max (0.059 max)			2000
NR4010			1.0 max (0.039 max)			5000
NR4012	4.0±0.2 (0.157±0.008)	4.0±0.2 (0.157±0.008)	1.2 max (0.047 max)	1.1±0.2 (0.043±0.008)	2.5±0.2 (0.098±0.008)	4500
NR4018			1.8 max (0.071 max)			3500
NR8040	8.0±0.2 (0.315±0.008)	8.0±0.2 (0.315±0.008)	^{*1} 4.2max (0.165max) ^{*2} 4.0max (0.157max)	1.6±0.3 (0.063±0.012)	5.6±0.3 (0.220±0.012)	1000

Unit : mm (inch)

*1) 0R9~6R8 Type
*2) 100~101 Type

Type	L	W	H	e	f	ΔI	Standard Quantity [pcs] Tape & Reel
NR5040	4.9±0.2 (0.193±0.008)	4.9±0.2 (0.193±0.008)	^{*3} 4.1max (0.161max) ^{*4} 4.0max (0.157max)	1.2±0.2 (0.047±0.008)	3.3±0.2 (0.130±0.008)	1.3±0.3 (0.051±0.011)	1500
NR6012 (E Type)	6.0±0.2 (0.236±0.008)	6.0±0.2 (0.236±0.008)	1.2 max (0.047 max)	1.35±0.2 (0.053±0.008)	4.0±0.2 (0.157±0.008)		1000
NR6020	6.0±0.2 (0.236±0.008)	6.0±0.2 (0.236±0.008)	2.0 max (0.078 max)	1.35±0.2 (0.053±0.008)	4.0±0.2 (0.157±0.008)	2.3±0.3 (0.091±0.011)	2500
NR6028	6.0±0.2 (0.236±0.008)	6.0±0.2 (0.236±0.008)	2.8 max (0.110 max)	1.35±0.2 (0.053±0.008)	4.0±0.2 (0.157±0.008)		2000
NR6045	6.0±0.2 (0.236±0.008)	6.0±0.2 (0.236±0.008)	4.5 max (0.177 max)	1.35±0.2 (0.053±0.008)	4.0±0.2 (0.157±0.008)		1500


Unit : mm (inch)

*3) 1R5~100Type
*4) 150~470Type


勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

Recommended Land Patterns


[NR3010, NR3012, NR3015]




[NR4010, NR4012, NR4018]




[NR5040]



[NR6012, NR6020, NR6028, NR6045]



[NR8040]



Unit : mm

AVAILABLE INDUCTANCE RANGE

Range	Type	NR 3010	NR 3012	NR 3015	NR 4010	NR 4012	NR 4018	NR 5040	NR 6012	NR 6020	NR 6028	NR 6045	NR 8040
		IMAX [mA]	Rdc±20% [Ω]	IMAX [mA]	Rdc±20% [Ω]	IMAX [mA]	Rdc±20% [Ω]	IMAX [mA]	Rdc±20% [Ω]	IMAX [mA]	Rdc±20% [Ω]	IMAX [mA]	Rdc±20% [Ω]
0.8		1300	0.065	1490	0.05	2100	0.030	1050	0.100	1500	0.060	1830	0.030
1.0													
3.3													
10		500	0.450	540	0.290	700	0.230	560	0.380	740	0.240	840	0.180
47		220	2.05	250	1.45	300	1.34	240	1.81	350	1.00		
100													
220													

PART NUMBERS

NR 3010 Shielded type

Ordering code	EHS (Environmental Hazardous Substances)	Inductance [μH]	Inductance Tolerance	Self-resonant frequency [MHz] (min.)	DC Resistance [Ω] (±20%)	Rated current ※) [mA]	Measuring frequency [kHz]
NR 3010T 1R0N	RoHS	1.0	±30%	126	0.065	1,300	1,400
NR 3010T 1R5N	RoHS	1.5		98	0.080	1,200	1,300
NR 3010T 2R2M	RoHS	2.2		82	0.095	1,100	1,100
NR 3010T 3R3M	RoHS	3.3		63	0.140	870	940
NR 3010T 4R7M	RoHS	4.7		56	0.190	750	780
NR 3010T 6R8M	RoHS	6.8		46	0.300	610	630
NR 3010T 100M	RoHS	10	±20%	35	0.450	500	510
NR 3010T 150M	RoHS	15		30	0.740	400	400
NR 3010T 220M	RoHS	22		25	1.03	350	350
NR 3010T 330M	RoHS	33		20	1.55	260	275
NR 3010T 470M	RoHS	47		17	2.05	220	235

NR 3012 Shielded type

Ordering code	EHS (Environmental Hazardous Substances)	Inductance [μH]	Inductance Tolerance	Self-resonant frequency [MHz] (min.)	DC Resistance [Ω] (±20%)	Rated current ※) [mA]	Measuring frequency [kHz]
NR 3012T 1R0N	RoHS	1.0	±30%	110	0.050	1,500	1,490
NR 3012T 1R5N	RoHS	1.5		92	0.060	1,360	1,400
NR 3012T 2R2M	RoHS	2.2		70	0.080	1,100	1,200
NR 3012T 3R3M	RoHS	3.3		55	0.100	910	1,050
NR 3012T 4R7M	RoHS	4.7		48	0.130	770	980
NR 3012T 6R8M	RoHS	6.8		40	0.190	670	740
NR 3012T 100M	RoHS	10	±20%	32	0.290	540	630
NR 3012T 150M	RoHS	15		27	0.450	440	485
NR 3012T 220M	RoHS	22		22	0.630	375	420
NR 3012T 330M	RoHS	33		19	1.03	310	330
NR 3012T 470M	RoHS	47		17	1.45	250	280

NR 3015 Shielded type

Ordering code	EHS (Environmental Hazardous Substances)	Inductance [μH]	Inductance Tolerance	Self-resonant frequency [MHz] (min.)	DC Resistance [Ω] (±20%)	Rated current ※) [mA]	Measuring frequency [kHz]
NR 3015T 1R0N	RoHS	1.0	±30%	100	0.030	2,100	2,100
NR 3015T 1R5N	RoHS	1.5		87	0.040	1,800	1,820
NR 3015T 2R2M	RoHS	2.2		64	0.060	1,480	1,500
NR 3015T 3R3M	RoHS	3.3		49	0.080	1,210	1,230
NR 3015T 4R7M	RoHS	4.7		40	0.120	1,020	1,040
NR 3015T 6R8M	RoHS	6.8		36	0.160	870	880
NR 3015T 100M	RoHS	10	±20%	28	0.230	700	710
NR 3015T 150M	RoHS	15		23	0.360	560	560
NR 3015T 220M	RoHS	22		20	0.520	470	470
NR 3015T 330M	RoHS	33		18	0.840	390	370
NR 3015T 470M	RoHS	47		17	1.34	320	300

※) The saturation current value (Idc1) is the DC current value having inductance decrease down to 30%. (at 20°C)

※) The temperature rise current value (Idc2) is the DC current value having temperature increase up to 40°C. (at 20°C)

※) The rated current is the DC current value that satisfies both of current value saturation current value and temperature rise current value.

* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

PART NUMBERS

NR 4010 Shielded type

Ordering code		EHS (Environmental Hazardous Substances)	Inductance [μ H]	Inductance Tolerance	Self-resonant frequency [MHz] (min.)	DC Resistance [Ω] ($\pm 20\%$)	Rated current ※) [mA]		Measuring frequency [kHz]
							Saturation current Idc1	Temperature rise current Idc2	
NR 4010T 1R0N		RoHS	1.0	$\pm 30\%$	116	0.100	1,800	1,050	100
NR 4010T 2R2N		RoHS	2.2		73	0.150	1,150	890	
NR 4010T 3R3M		RoHS	3.3		58	0.180	1,100	820	
NR 4010T 4R7M		RoHS	4.7	$\pm 20\%$	47	0.210	900	750	
NR 4010T 6R8M		RoHS	6.8		38	0.300	740	620	
NR 4010T 100M		RoHS	10		31	0.380	560	600	
NR 4010T 150M		RoHS	15		24	0.510	470	510	
NR 4010T 220M		RoHS	22		19	0.870	360	400	
NR 4010T 330M		RoHS	33		15	1.54	280	300	
NR 4010T 470M		RoHS	47		13	1.81	240	280	

NR 4012 Shielded type

Ordering code		EHS (Environmental Hazardous Substances)	Inductance [μ H]	Inductance Tolerance	Self-resonant frequency [MHz] (min.)	DC Resistance [Ω] ($\pm 20\%$)	Rated current ※) [mA]		Measuring frequency [kHz]
							Saturation current Idc1	Temperature rise current Idc2	
NR 4012T 1R0N		RoHS	1.0	$\pm 30\%$	131	0.060	2,500	1,500	100
NR 4012T 2R2M		RoHS	2.2		66	0.090	1,650	1,200	
NR 4012T 3R3M		RoHS	3.3		50	0.130	1,200	980	
NR 4012T 4R7M		RoHS	4.7	$\pm 20\%$	45	0.140	1,050	960	
NR 4012T 6R8M		RoHS	6.8		35	0.180	900	840	
NR 4012T 100M		RoHS	10		28	0.240	740	770	
NR 4012T 150M		RoHS	15		23	0.400	560	600	
NR 4012T 220M		RoHS	22		18	0.480	510	540	
NR 4012T 330M		RoHS	33		15	0.810	400	420	
NR 4012T 470M		RoHS	47		12	1.00	350	370	

NR 4018 Shielded type

Ordering code		EHS (Environmental Hazardous Substances)	Inductance [μ H]	Inductance Tolerance	Self-resonant frequency [MHz] (min.)	DC Resistance [Ω] ($\pm 20\%$)	Rated current ※) [mA]		Measuring frequency [kHz]
							Saturation current Idc1	Temperature rise current Idc2	
NR 4018T 1R0N		RoHS	1.0	$\pm 30\%$	80	0.030	4,000	1,830	100
NR 4018T 2R2M		RoHS	2.2		52	0.060	2,700	1,440	
NR 4018T 3R3M		RoHS	3.3		44	0.070	2,000	1,230	
NR 4018T 4R7M		RoHS	4.7	$\pm 20\%$	34	0.090	1,700	1,200	
NR 4018T 6R8M		RoHS	6.8		29	0.110	1,450	1,060	
NR 4018T 100M		RoHS	10		24	0.180	1,200	840	
NR 4018T 150M		RoHS	15		19	0.250	940	650	
NR 4018T 220M		RoHS	22		16	0.360	800	590	
NR 4018T 330M		RoHS	33		12	0.530	650	490	
NR 4018T 470M		RoHS	47		10	0.650	570	420	
NR 4018T 680M		RoHS	68		8.3	1.00	470	320	
NR 4018T 101M		RoHS	100		6.5	1.50	400	270	
NR 4018T 151M		RoHS	150		5.5	2.50	310	220	
NR 4018T 221M		RoHS	220		4.0	4.00	270	170	

NR 5040 Shielded type

Ordering code		EHS (Environmental Hazardous Substances)	Inductance [μ H]	Inductance Tolerance	Self-resonant frequency [MHz] (min.)	DC Resistance [Ω] ($\pm 30\%$)	Rated current ※) [mA]		Measuring frequency [kHz]
							Saturation current Idc1	Temperature rise current Idc2	
NR 5040T 1R5N		RoHS	1.5	$\pm 30\%$	60	0.020	6,000	3,600	100
NR 5040T 2R2N		RoHS	2.2		42	0.022	4,600	3,500	
NR 5040T 3R3N		RoHS	3.3		32	0.027	3,800	3,300	
NR 5040T 4R7N		RoHS	4.7	$\pm 20\%$	28	0.029	3,300	3,100	
NR 5040T 6R8M		RoHS	6.8		21	0.049	2,600	2,300	
NR 5040T 100M		RoHS	10		18	0.056	2,300	2,100	
NR 5040T 150M		RoHS	15		13	0.080	2,000	1,800	
NR 5040T 220M		RoHS	22		9	0.126	1,600	1,400	
NR 5040T 330M		RoHS	33		7	0.180	1,300	1,200	
NR 5040T 470M		RoHS	47		6	0.310	1,100	900	

NR 6012 Shielded type

Ordering code		EHS (Environmental Hazardous Substances)	Inductance [μ H]	Inductance Tolerance	Self-resonant frequency [MHz] (min.)	DC Resistance [Ω] ($\pm 20\%$)	Rated current ※) [mA]		Measuring frequency [kHz]
							Saturation current Idc1	Temperature rise current Idc2	
NR 6012T 2R5NE		RoHS	2.5	$\pm 30\%$	45	0.090	2,100	1,730	100
NR 6012T 4R0NE		RoHS	4.0		39	0.105	1,800	1,570	
NR 6012T 5R3ME		RoHS	5.3		34	0.125	1,500	1,400	
NR 6012T 6R8ME		RoHS	6.8	$\pm 20\%$	30	0.165	1,300	1,180	
NR 6012T 100ME		RoHS	10		22	0.235	1,000	1,000	
NR 6012T 150ME		RoHS	15		18	0.330	800	790	
NR 6012T 220ME		RoHS	22		12	0.530	760	630	
NR 6012T 330ME		RoHS	33		8	0.700	590	530	
NR 6012T 470ME		RoHS	47		6	1.05	520	460	
NR 6012T 680ME		RoHS	68		3	1.35	440	410	
NR 6012T 101ME		RoHS	100		1	2.18	350	320	

※) The saturation current value (Idc1) is the DC current value having inductance decrease down to 30%. (at 20°C)

※) The temperature rise current value (Idc2) is the DC current value having temperature increase up to 40°C. (at 20°C)

※) The rated current is the DC current value that satisfies both of current value saturation current value and temperature rise current value.

* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

PART NUMBERS

● NR 6020 Shielded type

Ordering code		EHS (Environmental Hazardous Substances)	Inductance [μ H]	Inductance Tolerance	Self-resonant frequency [MHz] (min.)	DC Resistance [Ω] ($\pm 20\%$)	Rated current ※) [mA]		Measuring frequency [kHz]
							Saturation current Idc1	Temperature rise current Idc2	
NR 6020T 0R8N		RoHS	0.8	$\pm 30\%$	110	0.020	5,500	3,800	100
NR 6020T 1R5N		RoHS	1.5		93	0.026	4,000	3,200	
NR 6020T 2R2N		RoHS	2.2		73	0.034	3,200	2,700	
NR 6020T 3R3N		RoHS	3.3		55	0.040	2,800	2,600	
NR 6020T 4R7N		RoHS	4.7		43	0.058	2,400	2,000	
NR 6020T 6R8N		RoHS	6.8	$\pm 20\%$	30	0.085	2,000	1,800	
NR 6020T 100M		RoHS	10		18	0.125	1,700	1,400	
NR 6020T 220M		RoHS	22		11	0.290	1,050	950	

● NR 6028 Shielded type

Ordering code		EHS (Environmental Hazardous Substances)	Inductance [μ H]	Inductance Tolerance	Self-resonant frequency [MHz] (min.)	DC Resistance [Ω] ($\pm 30\%$)	Rated current ※) [mA]		Measuring frequency [kHz]
							Saturation current Idc1	Temperature rise current Idc2	
NR 6028T 0R9N		RoHS	0.9	$\pm 30\%$	90	0.013	6,600	4,600	100
NR 6028T 1R5N		RoHS	1.5		78	0.016	5,000	4,200	
NR 6028T 2R2N		RoHS	2.2		68	0.020	4,200	3,700	
NR 6028T 3R0N		RoHS	3.0		55	0.023	3,600	3,400	
NR 6028T 4R7M		RoHS	4.7		39	0.031	2,700	3,000	
NR 6028T 6R0M		RoHS	6.0	$\pm 20\%$	30	0.040	2,500	2,500	
NR 6028T 100M		RoHS	10		20	0.065	1,900	1,900	
NR 6028T 150M		RoHS	15		17	0.095	1,600	1,800	
NR 6028T 220M		RoHS	22		12	0.135	1,300	1,400	
NR 6028T 330M		RoHS	33		10	0.220	1,100	1,100	
NR 6028T 470M		RoHS	47		8	0.300	950	920	
NR 6028T 680M		RoHS	68		5	0.420	760	770	
NR 6028T 101M		RoHS	100		3	0.600	620	660	

● NR 6045 Shielded type

Ordering code		EHS (Environmental Hazardous Substances)	Inductance [μ H]	Inductance Tolerance	Self-resonant frequency [MHz] (min.)	DC Resistance [Ω] ($\pm 30\%$)	Rated current ※) [mA]		Measuring frequency [kHz]
							Saturation current Idc1	Temperature rise current Idc2	
NR 6045T 1R0N		RoHS	1.0	$\pm 30\%$	110	0.014	8,500	4,200	100
NR 6045T 1R3N		RoHS	1.3		95	0.016	8,000	4,000	
NR 6045T 1R8N		RoHS	1.8		80	0.018	7,000	3,700	
NR 6045T 2R3N		RoHS	2.3		60	0.021	6,000	3,500	
NR 6045T 3R0N		RoHS	3.0		45	0.024	5,000	3,200	
NR 6045T 4R5M		RoHS	4.5	$\pm 20\%$	25	0.031	4,000	3,000	
NR 6045T 6R3M		RoHS	6.3		15	0.038	3,800	2,800	
NR 6045T 100M		RoHS	10		12	0.047	3,000	2,500	
NR 6045T 150M		RoHS	15		10	0.077	2,300	1,900	
NR 6045T 220M		RoHS	22		7	0.115	1,900	1,500	
NR 6045T 330M		RoHS	33		6	0.145	1,500	1,400	
NR 6045T 470M		RoHS	47		5	0.220	1,300	1,100	
NR 6045T 680M		RoHS	68		4	0.330	1,000	900	
NR 6045T 101M		RoHS	100		3	0.500	800	700	

● NR 8040 Shielded type

Ordering code		EHS (Environmental Hazardous Substances)	Inductance [μ H]	Inductance Tolerance	Self-resonant frequency [MHz] (min.)	DC Resistance [Ω] ($\pm 30\%$)	Rated current ※) [mA]		Measuring frequency [kHz]
							Saturation current Idc1	Temperature rise current Idc2	
NR 8040T 0R9N		RoHS	0.9	$\pm 30\%$	85	0.006	11,000	7,800	100
NR 8040T 1R4N		RoHS	1.4		63	0.007	9,000	7,000	
NR 8040T 2R0N		RoHS	2.0		50	0.009	7,400	6,300	
NR 8040T 3R6N		RoHS	3.6		34	0.015	5,300	4,900	
NR 8040T 4R7N		RoHS	4.7		30	0.018	4,700	4,100	
NR 8040T 6R8N		RoHS	6.8	$\pm 20\%$	24	0.025	4,000	3,700	
NR 8040T 100M		RoHS	10		22	0.034	3,400	3,100	
NR 8040T 150M		RoHS	15		16	0.050	2,700	2,400	
NR 8040T 220M		RoHS	22		13	0.066	2,200	2,200	
NR 8040T 330M		RoHS	33		12	0.100	1,900	1,700	
NR 8040T 470M		RoHS	47		8	0.150	1,500	1,400	
NR 8040T 680M		RoHS	68		7	0.230	1,200	1,100	
NR 8040T 101M		RoHS	100		6	0.290	1,000	1,000	

※) The saturation current value (Idc1) is the DC current value having inductance decrease down to 30%. (at 20°C)













※) The temperature rise current value (Idc2) is the DC current value having temperature increase up to 40°C. (at 20°C)

※) The rated current is the DC current value that satisfies both of current value saturation current value and temperature rise current value.

ELECTRICAL CHARACTERISTICS

DC Bias characteristics

(Measured by HP4285A)

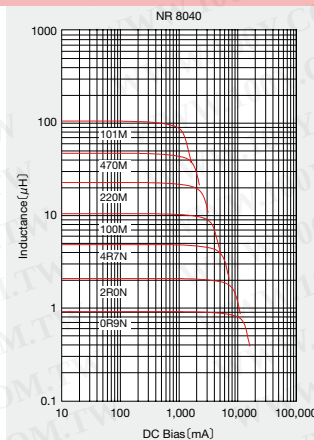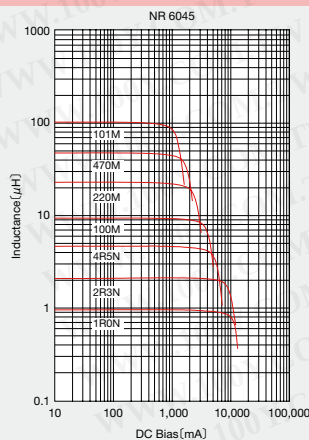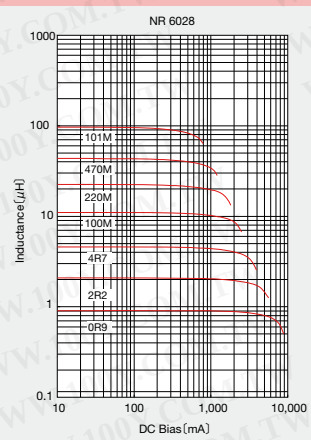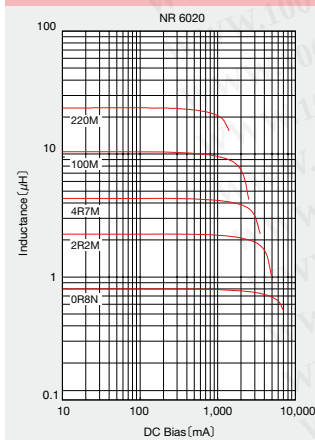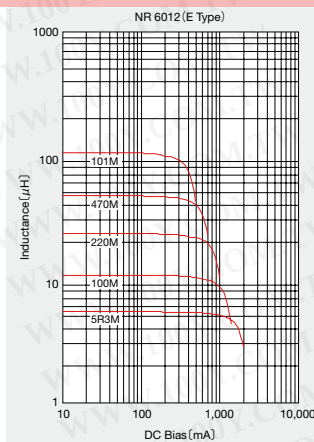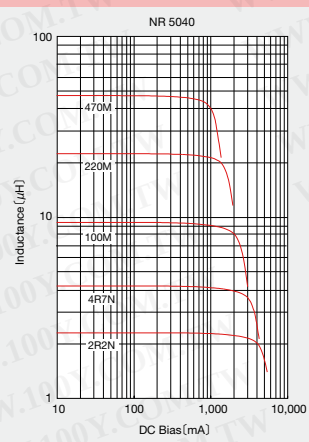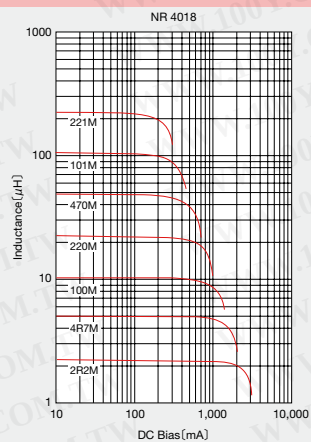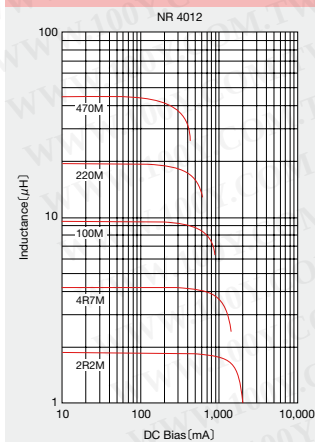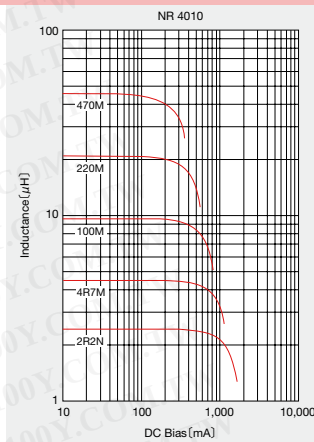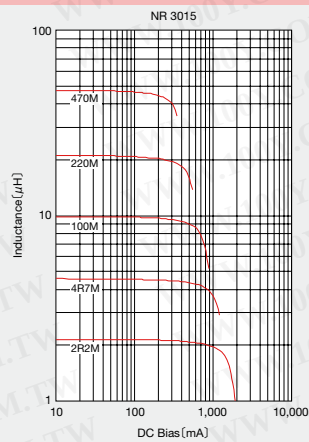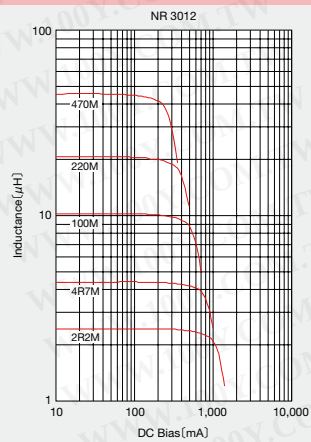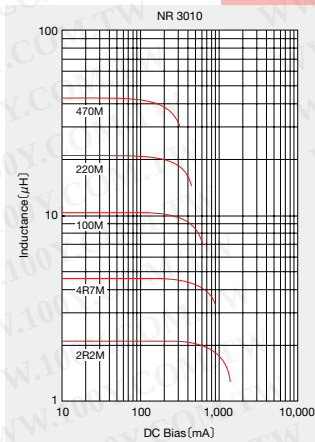

* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.


* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification.
For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

PACKAGING

① Minimum Quantity


Type	Standard Quantity [pcs]
	Tape & Reel
NRH2410	2500
NR 3010/NRH3010	2000
NR 3012/NRH3012/NRV3012	2000
NR 3015	2000
NR 4010/NRS4010	5000
NR 4012/NRS4012	4500
NR 4018/NRS4018	3500
NRG4026	2000
NRS5012	1000
NRS5014	1000
NRS5020	800
NR 5040	1500
NRS6010	1000
NR 6012/NRS6012	1000
NR 6020/NRS6020	2500
NR 6028/NRS6028	2000
NR 6045/NRS6045	1500
NRS8030	1000
NR 8040/NRS8040	1000

② Tape Material

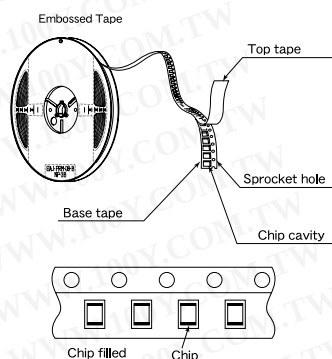

③ Taping dimensions

● Embossed tape 8mm wide (0.315 inches wide)

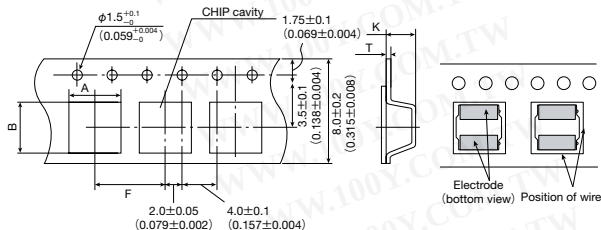


Type	Chip cavity		Insertion pitch	Tape thickness		
	A	B		F	T	K
NRH 2410	2.6±0.1 (0.102±0.004)	2.6±0.1 (0.102±0.004)	4.0±0.1 (0.157±0.004)	0.25±0.05 (0.009±0.002)	1.3±0.1 (0.051±0.004)	
NR 3010 NRH 3010	3.2±0.1 (0.126±0.004)	3.2±0.1 (0.126±0.004)		1.4±0.1 (0.055±0.004)		
NR 3012 NRH 3012 NRV3012				0.3±0.05 (0.012±0.002)	1.6±0.1 (0.063±0.004)	
NR 3015				1.9±0.1 (0.075±0.004)		

Unit : mm (inch)

Unit : mm (inch)


● Embossed tape 12mm wide (0.47 inches wide)

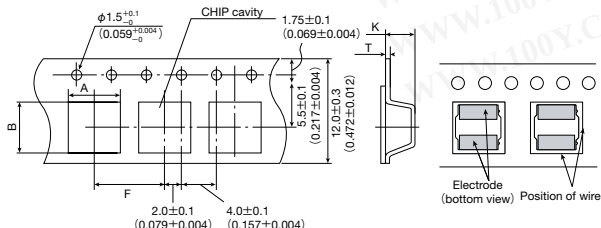

Type	Chip cavity		Insertion pitch	Tape thickness	
	A	B		T	K
NR 4010 NRS 4010	4.3±0.1 (0.169±0.004)	4.3±0.1 (0.169±0.004)	8.0±0.1 (0.315±0.004)	0.3±0.05 (0.012±0.002)	1.4±0.1 (0.055±0.004)
NR 4012 NRS 4012					1.6±0.1 (0.063±0.004)
NR 4018 NRS 4018					2.1±0.1 (0.083±0.004)
NRG 4026					3.1±0.1 (0.122±0.004)
NRS 5012	5.25±0.1 (0.207±0.004)	5.25±0.1 (0.207±0.004)		1.4±0.1 (0.055±0.004)	
NRS 5014				1.6±0.1 (0.063±0.004)	
NRS 5020				2.3±0.1 (0.091±0.004)	
NR 5040	5.15±0.1 (0.203±0.004)	5.15±0.1 (0.203±0.004)		0.4±0.1 (0.016±0.004)	4.2±0.1 (0.165±0.004)
NRS 6010	6.3±0.1 (0.248±0.004)	6.3±0.1 (0.248±0.004)			1.4±0.1 (0.055±0.004)
NR 6012 NRS 6012			1.6±0.1 (0.063±0.004)		
NR 6020 NRS 6020			2.3±0.1 (0.090±0.004)		
NR 6028 NRS 6028			3.1±0.1 (0.122±0.004)		
NR 6045 NRS 6045			4.7±0.1 (0.185±0.004)		

Unit : mm (inch)

● Embossed tape 16mm wide (0.63 inches wide)

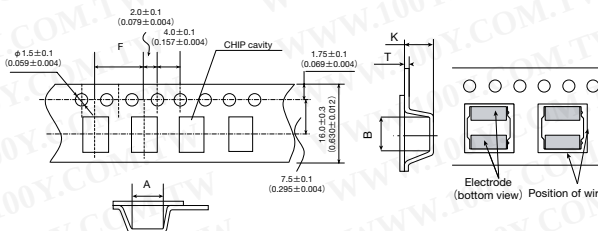


Type	Chip cavity		Insertion pitch	Tape thickness	
	A	B		T	K
NRS 8030	8.3±0.1	8.3±0.1	12.0±0.1	0.5±0.1	3.4±0.1
NR 8040	(0.327±0.004)	(0.327±0.004)	(0.472±0.004)	(0.020±0.004)	(0.134±0.004)
NRS 8040					4.5±0.1
					(0.177±0.004)
Unit : mm (inch)					

Unit : mm (inch)

④ Leader and Blank portion


● NR, NRH, NRS, NRG, NRV

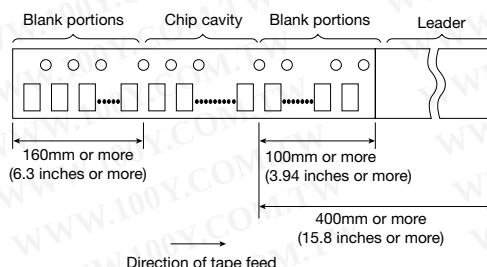

* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.


PACKAGING

⑤ Reel size

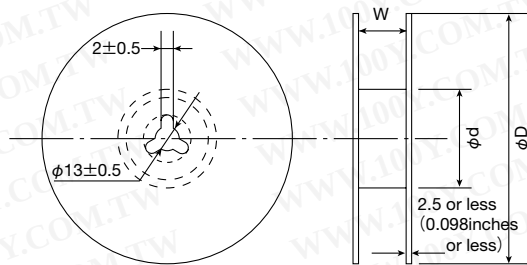

Type	Reel size (Reference values)		
	ϕD	ϕd	W
NRH2410	180 ± 0.5 (7.087 $\pm$ 0.019)	60 ± 1.0 (2.36 $\pm$ 0.04)	10.0 ± 1.5 (0.394 $\pm$ 0.059)
NR 3010			
NRH 3010			
NR 3012			
NRH 3012			
NRV 3012			
NR 3015	180 ± 3.0 (7.087 $\pm$ 0.118)	60 ± 2.0 (2.36 $\pm$ 0.08)	14.0 ± 1.5 (0.551 $\pm$ 0.059)
NRS 5012			
NRS 5014			
NRS 5020			
NRS 6010			
NR 6012			
NRS 6012			

Unit : mm (inch)

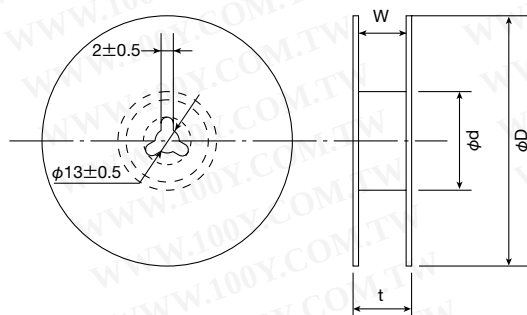


Type	Reel size (Reference values)			
	ϕD	ϕd	t (max.)	W
NR 4010	330 ± 3.0 (12.99 $\pm$ 0.118)	80 ± 2.0 (3.15 $\pm$ 0.078)	18.5 (0.72)	13.5 ± 1.0 (0.531 $\pm$ 0.04)
NRS 4010				
NR 4012				
NRS 4012				
NR 4018				
NRS 4018				
NRG 4026				
NR 5040				
NR 6020			22.5 (0.89)	17.5 ± 1.0 (0.689 $\pm$ 0.04)
NRS 6020				
NR 6028				
NRS 6028				
NR 6045				
NRS 6045				
NRS 8030				
NR 8040				
NRS 8040				

Unit : mm (inch)

⑥ Top Tape Strength

The top tape requires a peel-off force of 0.1 to 1.3N in the direction of the arrow as illustrated below.



* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

RELIABILITY DATA

Wound Chip power inductor (NR, NS-series)

1. Operating Temperature Range

NR30/40/50/60/80, NRV30, NRH24/30, NRS40/50/60/80 Type	-25~+120°C
NR10050 Type	-25~+105°C
NS12555, NS12565, NS12575Type	-40~+125°C

【Test Method and Remarks】
Including self-generated heat

2. Storage Temperature Range

NR30/40/50/60/80, NRV30, NRH24/30, NRS40/50/60/80 Type	-40~+85°C
NR10050 Type	
NS12555, NS12565, NS12575Type	

【Test Method and Remarks】

NR30/40/50/60/80, NRV30, NRH24/30, NRS40/50/60/80 Type, NR10050 Type, NS12555, NS12565, NS12575Type : -5 to 40°C for the product with taping.

3. Rated current

NR30/40/50/60/80, NRV30, NRH24/30, NRS40/50/60/80 Type	Within the specified tolerance
NR10050 Type	
NS12555, NS12565, NS12575Type	

4. Inductance

NR30/40/50/60/80, NRV30, NRH24/30, NRS40/50/60/80 Type	Within the specified tolerance
NR10050 Type	
NS12555, NS12565, NS12575Type	

【Test Method and Remarks】

LCR Meter : HP 4285A or equivalent, Measuring frequency : Specified frequency

NR30/40/50/60/80, NRV30, NRH24/30, NRS40/50/60/80 Type, NS12555, NS12565, NS12575Type : LCR Meter : HP 4285A or equivalent, 100KHz, 1V
NR10050 Type : LCR Meter : HP 4263A or equivalent, 100KHz, 1V

5. DC Resistance

NR30/40/50/60/80, NRV30, NRH24/30, NRS40/50/60/80 Type	Within the specified tolerance
NR10050 Type	
NS12555, NS12565, NS12575Type	

【Test Method and Remarks】

DC ohmmeter : HIOKI 3227 or equivalent

6. Self resonance frequency

NR30/40/50/60/80, NRV30, NRH24/30, NRS40/50/60/80 Type	Within the specification
NR10050 Type	
NS12555, NS12565, NS12575Type	

【Test Method and Remarks】

NR30/40/50/60/80, NRV30, NRH24/30, NRS40/50/60/80 Type, NR10050 Type, NS12555, NS12565, NS12575Type : Impedance analyzer/material analyzer : HP4291A or equivalent HP4191A, 4192A or equivalent

7. Temperature characteristic

NR30/40/50/60/80, NRV30, NRH24/30, NRS40/50/60/80 Type	Inductance change : Within $\pm 20\%$
NR10050 Type	Inductance change : Within $\pm 15\%$
NS12555, NS12565, NS12575Type	

【Test Method and Remarks】

NR30/40/50/60/80, NRV30, NRH24/30, NRS40/50/60/80 Type, NR10050 Type : Measurement of inductance shall be taken at temperature range within -25°C~+85°C.
With reference to inductance value at +20°C., change rate shall be calculated.
NS12555, NS12565, NS12575Type : Measurement of inductance shall be taken at temperature range within -40°C~+125°C.
With reference to inductance value at +20°C., change rate shall be calculated.

Change of maximum inductance deviation in step 1 to 5

Temperature at step 1	20°C
Temperature at step 2	Minimum operating temperature
Temperature at step 3	20°C (Standard temperature)
Temperature at step 4	Maximum operating temperature
Temperature at step 5	20°C

8. Resistance to flexure of substrate

NR30/40/50/60/80, NRV30, NRH24/30, NRS40/50/60/80 Type	No damage
NR10050 Type	No damage
NS12555, NS12565, NS12575Type	

【Test Method and Remarks】

NR30/40/50/60/80, NRV30, NRH24/30, NRS40/50/60/80 Type, NS12555, NS12565, NS12575Type :



The test samples shall be soldered to the test board by the reflow. As illustrated below, apply force in the direction of the arrow indicating until deflection of the test board reaches to 2 mm.

Test board size : 100×40×1.0

Test board material : glass epoxy-resin

Solder cream thickness : 0.10 (NR30/40, NRS40, NRH24/30, NRV30)

0.15 (NR50/60/80, NRS40/50/60, NS12555, NS12565, NS12575Type)



Unit : mm

* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification.
For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

RELIABILITY DATA

Wound Chip power inductor (NR, NS-series)

9. Insulation resistance : between wires

NR30/40/50/60/80, NRV30, NRH24/30, NRS40/50/60/80 Type
NR10050 Type
NS12555, NS12565, NS12575Type

10. Insulation resistance : between wire and core

NR30/40/50/60/80, NRV30, NRH24/30, NRS40/50/60/80 Type
NR10050 Type
NS12555, NS12565, NS12575Type

11. Withstanding voltage : between wire and core

NR30/40/50/60/80, NRV30, NRH24/30, NRS40/50/60/80 Type
NR10050 Type
NS12555, NS12565, NS12575Type

12. Adhesion of terminal electrode

NR30/40/50/60/80, NRV30, NRH24/30, NRS40/50/60/80 Type
NR10050 Type
NS12555, NS12565, NS12575Type


Shall not come off PC board

[Test Method and Remarks]

NR30/40/50/60/80, NRV30, NRH24/30, NRS40/50/60/80 Type, NS12555, NS12565, NS12575 Type :

The test samples shall be soldered to the test board by the reflow.

- Applied force : 10N to X and Y directions.
- Duration : 5s.
- Solder cream thickness : 0.15mm.



NR10050 Type :

- Applied force : 5N to X and Y directions.
- Duration : 5s.

13. Resistance to vibration

NR30/40/50/60/80, NRV30, NRH24/30, NRS40/50/60/80 Type
NR10050 Type
NS12555, NS12565, NS12575Type

Inductance change : Within $\pm 10\%$
No significant abnormality in appearance.

[Test Method and Remarks]

NR30/40/50/60/80, NRV30, NRH24/30, NRS40/50/60/80 Type, NR10050 Type, NS12555, NS12565, NS12575Type :

The test samples shall be soldered to the test board by the reflow.
Then it shall be submitted to below test conditions.

Frequency Range	10~55Hz	
Total Amplitude	1.5mm (May not exceed acceleration 196m/s ²)	
Sweeping Method	10Hz to 55Hz to 10Hz for 1min.	
Time	X	For 2 hours on each X, Y, and Z axis.
	Y	
	Z	

Recovery : At least 2hrs of recovery under the standard condition after the test, followed by the measurement within 48hrs.

14. Solderability

NR30/40/50/60/80, NRV30, NRH24/30, NRS40/50/60/80 Type
NR10050 Type
NS12555, NS12565, NS12575Type

At least 90% of surface of terminal electrode is covered by new solder.

[Test Method and Remarks]

The test samples shall be dipped in flux, and then immersed in molten solder as shown in below table.
Flux : Methanol solution containing rosin 25%.

NR30/40/50/60/80, NRV30, NRH24/30, NRS40/50/60/80 Type, NS12555, NS12565, NS12575 Type :

Solder Temperature	245 $\pm$ 5°C
Time	5 $\pm$ 1.0 sec.

※Immersion depth : All sides of mounting terminal shall be immersed.

15. Resistance to soldering heat

NR30/40/50/60/80, NRV30, NRH24/30, NRS40/50/60/80 Type
NR10050 Type
NS12555, NS12565, NS12575Type

Inductance change : Within $\pm 10\%$
No significant abnormality in appearance.

[Test Method and Remarks]

NR30/40/50/60/80, NRV30, NRH24/30, NRS40/50/60/80 Type, NR10050 Type, NS12555, NS12565, NS12575 Type :

The test sample shall be exposed to reflow oven at 230 $\pm$ 5°C for 40 seconds, with peak temperature at 260 $\pm$ 5°C for 5 seconds, 2 times.

NR6020 Type :

The test sample shall be exposed to reflow oven at 230 $\pm$ 5°C for 40 seconds, with peak temperature at 250 $\pm$ 5°C for 5 seconds, 2 times.

Test board thickness : 1.0mm (NR30/40/50/60/80, NRV30, NRH24/30, NRS40/50/60/80 Type, NS12555, NS12565, NS12575 Type)
1.6mm (NR10050 Type)

Test board material : glass epoxy-resin

* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification.
For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

RELIABILITY DATA

Wound Chip power inductor (NR, NS-series)

16. Thermal shock

NR30/40/50/60/80, NRV30, NRH24/30, NRS40/50/60/80 Type	Inductance change : Within $\pm 10\%$ No significant abnormality in appearance.
NR10050 Type	
NS12555, NS12565, NS12575Type	

[Test Method and Remarks]

NR30/40/50/60/80, NRV30, NRH24/30, NRS40/50/60/80 Type, NR10050 Type, NS12555, NS12565, NS12575Type :

The test samples shall be soldered to the test board by the reflow. The test samples shall be placed at specified temperature for specified time by step 1 to step 4 as shown in below table in sequence. The temperature cycle shall be repeated 100 cycles.

Conditions of 1 cycle		
Step	Temperature (°C)	Duration (min)
1	-40 ± 3	30 ± 3
2	Room temperature	Within 3
3	$+85 \pm 2$	30 ± 3
4	Room temperature	Within 3

17. Damp heat

NR30/40/50/60/80, NRV30, NRH24/30, NRS40/50/60/80 Type	Inductance change : Within $\pm 10\%$ No significant abnormality in appearance.
NR10050 Type	
NS12555, NS12565, NS12575Type	Inductance change : Within $\pm 10\%$ No significant abnormality in appearance.

[Test Method and Remarks]

NR30/40/50/60/80, NRV30, NRH24/30, NRS40/50/60/80 Type, NS12555, NS12565, NS12575Type :

The test samples shall be soldered to the test board by the reflow.

The test samples shall be placed in thermostatic oven set at specified temperature and humidity as shown in below table.

Temperature	$60 \pm 2^\circ\text{C}$
Humidity	$90 \sim 95\% \text{RH}$
Time	$500 + 24/-0$ hour

18. Loading under damp heat

NR30/40/50/60/80, NRV30, NRH24/30, NRS40/50/60/80 Type	Inductance change : Within $\pm 10\%$ No significant abnormality in appearance.
NR10050 Type	
NS12555, NS12565, NS12575Type	

[Test Method and Remarks]

NR30/40/50/60/80, NRV30, NRH24/30, NRS40/50/60/80 Type, NR10050 Type, NS12555, NS12565, NS12575Type :

The test samples shall be soldered to the test board by the reflow.

The test samples shall be placed in thermostatic oven set at specified temperature and humidity and applied the rated current continuously as shown in below table.

Temperature	$60 \pm 2^\circ\text{C}$
Humidity	$90 \sim 95\% \text{RH}$
Applied current	Rated current
Time	$500 + 24/-0$ hour

19. Low temperature life test

NR30/40/50/60/80, NRV30, NRH24/30, NRS40/50/60/80 Type	Inductance change : Within $\pm 10\%$ No significant abnormality in appearance.
NR10050 Type	
NS12555, NS12565, NS12575Type	

[Test Method and Remarks]

NR30/40/50/60/80, NRV30, NRH24/30, NRS40/50/60/80 Type, NR10050 Type, NS12555, NS12565, NS12575Type :

The test samples shall be soldered to the test board by the reflow.

After that, the test samples shall be placed at test conditions as shown in below table.

Temperature	$-40 \pm 2^\circ\text{C}$
Time	$500 + 24/-0$ hour

20. High temperature life test

NR30/40/50/60/80, NRV30, NRH24/30, NRS40/50/60/80 Type	Inductance change : Within $\pm 10\%$ No significant abnormality in appearance.
NR10050 Type	
NS12555, NS12565, NS12575Type	

[Test Method and Remarks]

NR10050 Type :

Temperature	$105 \pm 3^\circ\text{C}$
Time	$500 + 24/-0$ hour

Recovery : At least 2hrs of recovery under the standard condition after the test, followed by the measurement within 48 hrs.

21. Loading at high temperature life test

NR30/40/50/60/80, NRV30, NRH24/30, NRS40/50/60/80 Type	Inductance change : Within $\pm 10\%$ No significant abnormality in appearance.
NR10050 Type	
NS12555, NS12565, NS12575Type	Inductance change : Within $\pm 10\%$ No significant abnormality in appearance.

[Test Method and Remarks]

NR30/40/50/60/80, NRV30, NRH24/30, NRS40/50/60/80 Type, NS12555, NS12565, NS12575Type :

The test samples shall be soldered to the test board by the reflow soldering.

Temperature	$85 \pm 2^\circ\text{C}$
Applied current	Rated current
Time	$500 + 24/-0$ hour

* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification.
For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

RELIABILITY DATA

Wound Chip power inductor (NR, NS-series)

22. Standard condition

NR30/40/50/60/80, NRV30, NRH24/30,
NRS40/50/60/80 Type

NR10050 Type

NS12555, NS12565, NS12575 Type

Standard test condition :

Unless otherwise specified, temperature is $20 \pm 15^{\circ}\text{C}$ and $65 \pm 20\%$ of relative humidity.

When there is any question concerning measurement result: In order to provide correlation data, the test shall be condition of $20 \pm 2^{\circ}\text{C}$ of temperature, $65 \pm 5\%$ relative humidity.

Inductance is in accordance with our measured value.

PRECAUTIONS

Wound Chip power inductor (NR, NS-series)

1. Circuit Design	
Precautions	◆ Operating environment 1. The products described in this specification are intended for use in general electronic equipment, (office supply equipment, telecommunications systems, measuring equipment, and household equipment). They are not intended for use in mission-critical equipment or systems requiring special quality and high reliability (traffic systems, safety equipment, aerospace systems, nuclear control systems and medical equipment including life-support systems,) where product failure might result in loss of life, injury or damage. For such uses, contact TAIYO YUDEN Sales Department in advance.
2. PCB Design	
Precautions	◆ Land pattern design 1. Please refer to a recommended land pattern.
Technical considerations	◆ Land pattern design Surface Mounting - Mounting and soldering conditions should be checked beforehand. - Applicable soldering process to this products is reflow soldering only.
3. Considerations for automatic placement	
Precautions	◆ Adjustment of mounting machine 1. Excessive impact load should not be imposed on the products when mounting onto the PC boards. 2. Mounting and soldering conditions should be checked beforehand.
Technical considerations	◆ Adjustment of mounting machine 1. When installing products, care should be taken not to apply distortion stress as it may deform the products.
4. Soldering	
Precautions	◆ Reflow soldering 1. Please contact any of our offices for a reflow soldering, and refer to the recommended condition specified. 2. The product shall be used reflow soldering only. 3. Please do not add any stress to a product until it returns in normal temperature after reflow soldering. ◆ Lead free soldering 1. When using products with lead free soldering, we request to use them after confirming adhesion, temperature of resistance to soldering heat, soldering etc sufficiently. ◆ Recommended conditions for using a soldering iron (NR10050 Type) - Put the soldering iron on the land-pattern. - Soldering iron's temperature - Below 350°C - Duration - 3 seconds or less - The soldering iron should not directly touch the inductor.
Technical considerations	◆ Reflow soldering 1. If products are used beyond the range of the recommended conditions, heat stresses may deform the products, and consequently degrade the reliability of the products. NR30/40/50/60/80, NRV30, NRH24/30, NRS40/50/60/80 Type, NR10050, NS12555, NS12565, NS12575 Type Recommended reflow condition (Pb free solder)
5. Cleaning	
Precautions	◆ Cleaning conditions 1. Washing by supersonic waves shall be avoided.
Technical considerations	◆ Cleaning conditions 1. If washed by supersonic waves, the products might be broken.
6. Handling	
Precautions	◆ Handling 1. Keep the product away from all magnets and magnetic objects. ◆ Breakaway PC boards (splitting along perforations) 1. When splitting the PC board after mounting product, care should be taken not to give any stresses of deflection or twisting to the board. 2. Board separation should not be done manually, but by using the appropriate devices. ◆ Mechanical considerations 1. Please do not give the product any excessive mechanical shocks. 2. Please do not add any shock and power to a product in transportation. ◆ Pick-up pressure 1. Please do not push to add any pressure to a winding part. Please do not give any shock and push into a ferrite core exposure part. ◆ Packing 1. Please avoid accumulation of a packing box as much as possible.
Technical considerations	◆ Breakaway PC boards (splitting along perforations) 1. The position of the product on PCBs shall be carefully considered to minimize the stress caused from splitting of the PCBs. ◆ Mechanical considerations 1. There is a case to be damaged by a mechanical shock. 2. There is a case to be broken by the handling in transportation. ◆ Pick-up pressure 1. Damage and a characteristic can vary with an excessive shock or stress. ◆ Packing 1. If packing boxes are accumulated, that could cause a deformation on packing tapes or a damage on the products.
7. Storage conditions	
Precautions	◆ Storage 1. To maintain the solderability of terminal electrodes and to keep the packing material in good condition, temperature and humidity in the storage area should be controlled. Recommended conditions Ambient temperature: -5~40°C Humidity: Below 70% RH The ambient temperature must be kept below 30°C. Even under ideal storage conditions, solderability of products electrodes may decrease as time passes. For this reason, product should be used within 6 months from the time of delivery. In case of storage over 6 months, solderability shall be checked before actual usage.
Technical considerations	◆ Storage 1. Under a high temperature and humidity environment, problems such as reduced solderability caused by oxidation of terminal electrodes and deterioration of taping/packaging materials may take place.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.