

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

[YD-T1 Model](#)
[YD-T1 L2 Model](#)
[BACK](#)

YC-T1L2, YD-T4L2 SERIES

1. 特點

T1 輸出端子使用250快速端子

T4 輸出端子使用M-4 螺絲

YC-T1L2 安規取得：UL and CSA(YC10T1L2
 無安規)

YD-T4L2 安規取得：UL, CSA, VDE
 (YD10T4L2無安規)



YC-T1L2



YD-T4L2


2. 規格

項目 / 型號		YC01T1L2/ YD01T4L2	YC03T1L2/ YD03T4L2	YC06T1L2/ YD06T4L2	YC10T1L2/ YD10T4L2
額定電壓		125/250V AC	125/250V AC	125/250V AC	125/250V AC
額定電流		1A	3A	6A	10A
洩漏電流		0.8mA MAX 250V,50HZ	0.8mA MAX 250V,50HZ	0.8mA MAX 250V,50HZ	0.8mA MAX 250V,50HZ
耐電壓	線對線	1450V DC	1450V DC	1450V DC	1450V DC
	線對地	2250V DC	2250V DC	2250V DC	2250V DC
絕緣阻抗		100M ohm MIN 250VDC	100M ohm MIN 250VDC	100M ohm MIN 250VDC	100M ohm MIN 250VDC
直流阻抗		0.3 ohm MAX	0.15 ohm MAX	0.1 ohm MAX	0.05 ohm MAX
溫度上升		30C MAX	30C MAX	30C MAX	30C MAX
溫度使用範圍		-25 ~ +85C	-25 ~ +85C	-25 ~ +85C	-25 ~ +85C
CX		0.1uF	0.1uF	0.1uF	0.1uF
CY		3300pF	3300pF	3300pF	3300pF
電阻		10M/ohm	10M/ohm	10M/ohm	10M/ohm
電感值		3.7mH	1.8mH	0.7mH	0.3mH
衰減量	NORMAL MODE 25dbMIN	0.25 ~ 15MHZ	0.40 ~ 28MHZ	0.60 ~ 30MHZ	0.85 ~ 42MHZ
	COMMON MODE 25dbMIN	0.10 ~ 15MHZ	0.18 ~ 22MHZ	0.40~ 25MHZ	1.00 ~ 50MHZ


3. 衰減量

COMMON MODE (LINE TO GROUND) IN 50 OHM SYSTEM							
TYPE	CURRENT RATING	FREQUENCY-MHZ					
		0.15	0.5	1.0	5.0	10.0	30.0
YC01T1L2/YD01T4L2	1A	46	74	73	58	51	27
YC03T1L2/YD03T4L2	3A	38	68	80	58	53	48
YC06T1L2/YD06T4L2	6A	21	51	62	66	69	51
YC10T1L2/YD10T4L2	10A	4	32	50	66	58	48
DIFFERENTIAL MODE (LINE TO LINE) IN 50 OHM SYSTEM							
YC01T1L2/YD01T4L2	1A	7	52	46	54	47	32
YC03T1L2/YD03T4L2	3A	5	53	62	51	44	38
YC06T1L2/YD06T4L2	6A	15	30	75	55	49	41
YC10T1L2/YD10T4L2	10A	6	18	54	55	48	41


4. 線路圖

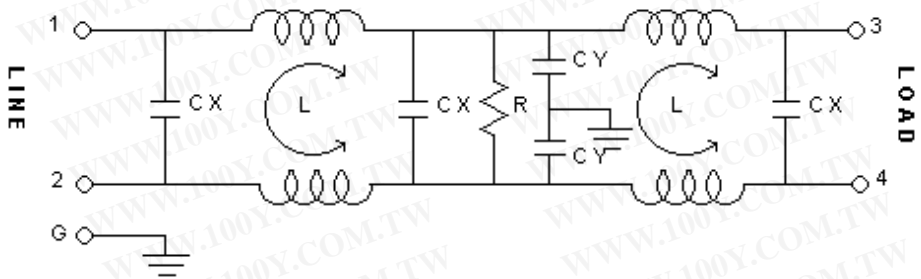

5. 尺寸圖

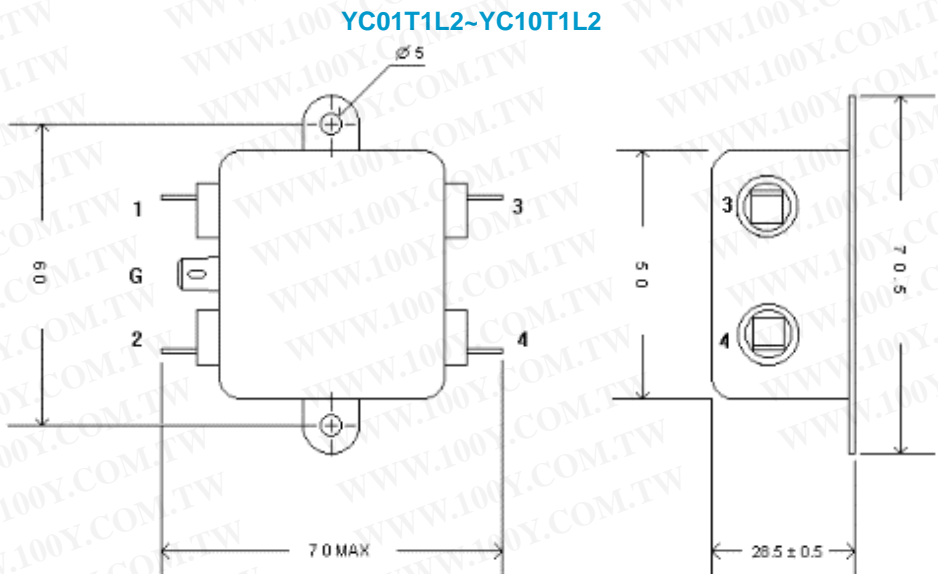

YD01T4L2~YD10T4L2

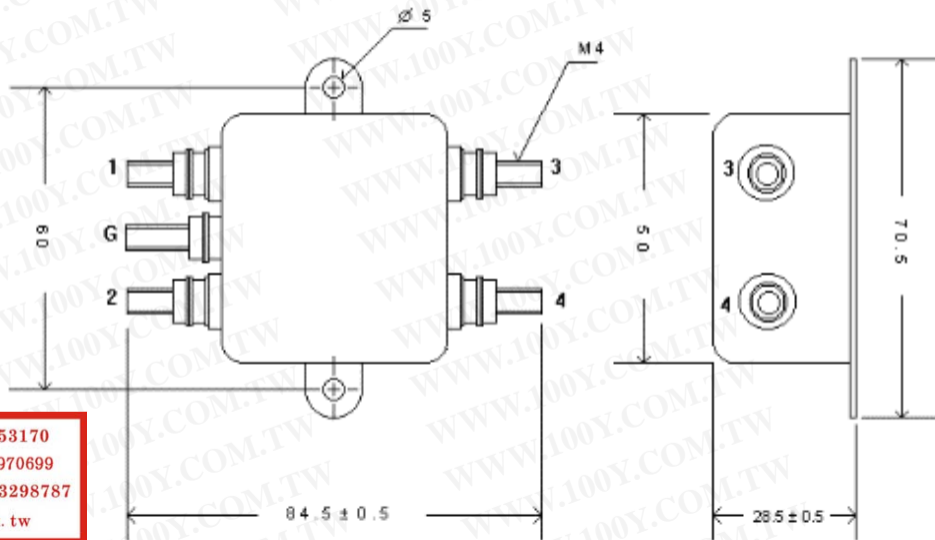

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)