


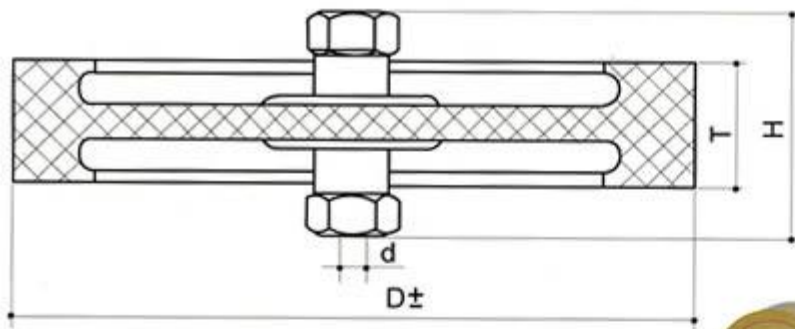

型号	电容器 (PF)		温度特性	额定直流电压 (KV _√)	额定无功功率 (KVA)	最大电流 (A)	正常气候条件下		尺 寸(mm)			
	标准值	允许偏差					tgδ <	Ri>MΩ	D	T	H	d
									直径	厚	高	螺母
CCG81-1 (DT50)	50-200			10	8	12			50	17	40-30	
CCG81-2 (DT60)	100-300			12	15	15			60	15	30	M6
	500			10	15	15				15	28	
CCG81-3 (DT80)	300			15	30	20			80	18	31	
	500			14	15	20				16	28	
	1000			8	15	20				18	28	
CCG81-4 (DT110)	300	K (±10%)	U	30	90	17	0.0006	10000	110	27	52	
	500			16	45	17				19	48	
	1000			12	40	20				17	46	
	1500			9	22	20				15	45	
CCG81-5 (DT140)	500			30	90	25			140	25	52	M8
	1000			20	100	30				25	50	
	1500			15	90	30				20	48	
	2000			8	70	25				20	45	
CCG81-6 (DT150)	500			30	120	35			150	25	52	
	1500			20	120	35				23	48	
	2200			15	90	30				21	46	
CCG81-7 (DT160)	2000			20	120	40			160	23	48	
CCG81-8 (DT200)	1000-2000			30-20	300-200	60			200	33-30	68-62	M10
	3000-5000			13-12	100-80	60				30-25	47-45	

注: CCG81-8 3000PF、5000PF螺母为六爪引片式