




Panel Cutout




Plastic Integrated Kurlnut





M11XP1.0 Plastic Bushing

Push Button=Black

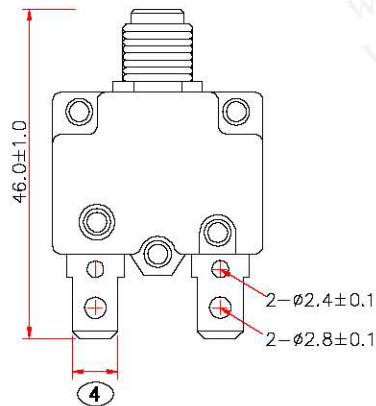

Nickel of Plated

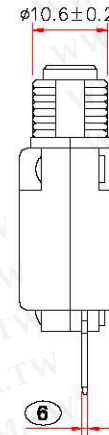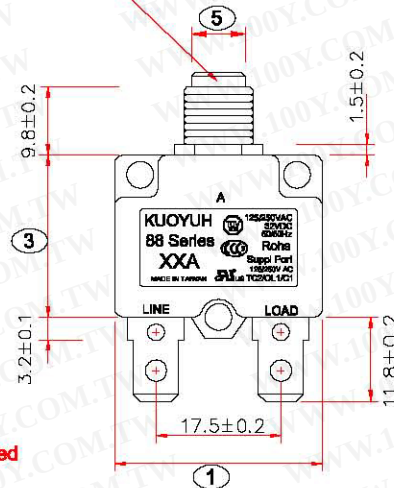

NO.	Dimensions
①	29.2±0.3
②	14.4±0.2
③	22.6±0.3
④	6.35±0.05
⑤	φ7.5±0.1
⑥	0.80±0.02

OVERLOAD	TRIP TIME
600%	0.34-1.05sec
500%	0.42-1.75sec
400%	0.62-3.05sec
300%	1.50-5.5sec
200%	5.2-30.0sec
150%	Trip in 1Hour
100%	Hold, No Trip

Marking:



備註:

- 1.XXA 表示額定電流. XXA is Rating Amp.
- 2.安規 Approve mark:
 CUL 3A~30A 125/250Vac
 TUV 3.0A~20.0A 125/250Vac; 32Vdc
 CCC 3.0A~20.0A 125/250Vac
 CSA 10A, 15A 125Vac
3. 送樣溫度: 溫度為235±5°C,
 60W烙鐵加熱時, 溫度為350±5°C, 加熱時間為3秒內, 最多不可超過5秒.
 When tin stove processing temperature is 235±5°C, time is 3-5sec;
 60W wending iron processing, temp is 350±5°C, within 3 secs, can't over 5 sec.
4. 符合歐盟RoHS指令 2002/95/EC 要求. (檢驗時使用排除條款)
 The product accord with the requirement of ROHS(EU 2002/95/EC)
 Contacts use Exempted item of RoHS Directive 2010/571/EU 8(a)
5. (X) 表示必檢尺寸, The size of the need to check

NO	DESCRIPTION	APPROVED	DATE	TOLERANCE	APPROVED	CHECK	DESING	DRAWER	UNIT	mm	
⑤				DIMENSION	TOLERANCE				SCALE	1:1	
④				XX.XX	±0.05				REV	E/1	
③				XX.X	±0.1				DATE	2012.06.01	
②				XX	±0.15				TITLE		
①	2012/10/01 UL+CUL 21~30A TC2/OL0/C1	Approved		ANGLE	TOLERANCE	FILE NO	88 Series Thermal Circuit Breaker		DRAWING NO	5059	
				X	±1°						
				X.X	±0.5°						