

双刀带灯波动开关

Double-poles Illuminated Rocker Switch


型号(TYPE): 5085A Series

技术特性 (Specification)


1. 规格 (Rating): 20A 125VAC; 15A 250VAC; 35A 12VDC
2. 接触电阻 (Contact R): 35mΩ max
3. 绝缘电阻 (Insulation R): 500V DC 100MΩ min
4. 耐电压 (Dielectric Strength): 1 Minute 1500V AC
5. 操作温度 (Operating Temperature): -25℃ ~ +85℃
6. 电气寿命 (Electrical Life): 10, 000 Cycles

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

外型图 (Outline Drawing)

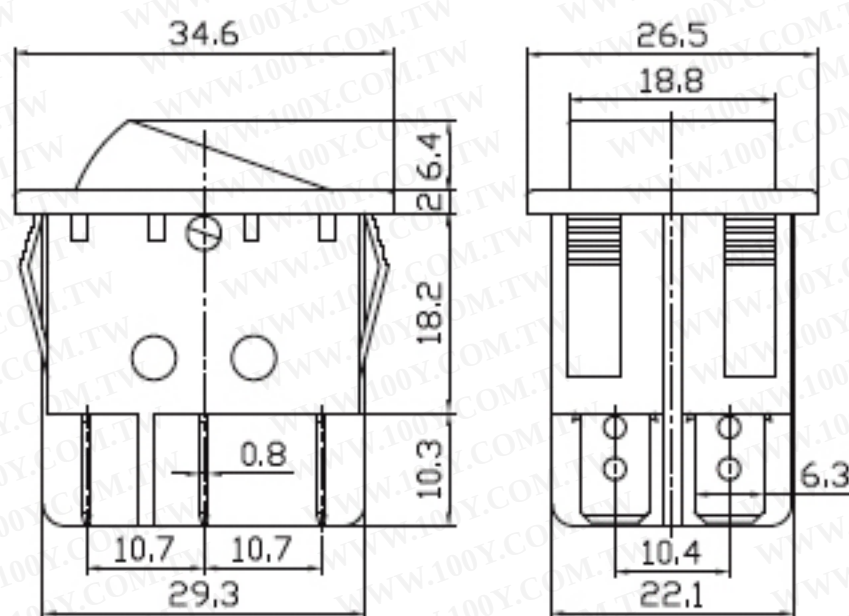

安装尺寸 (Mounting)

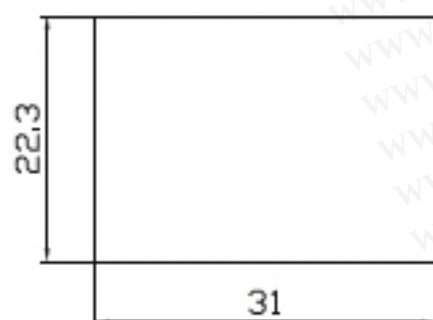

电路图 (Circuitry)

