
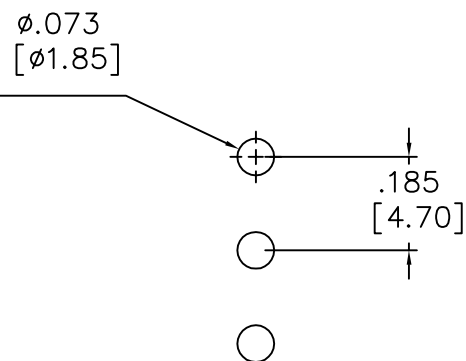
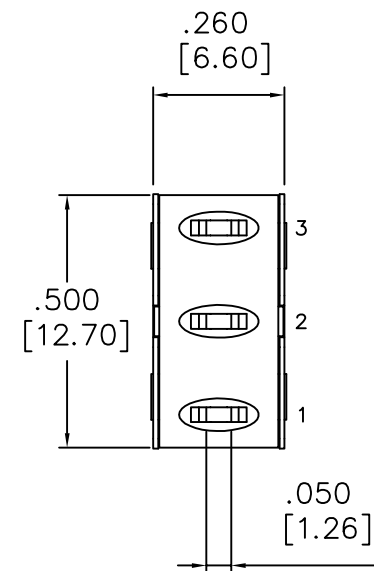
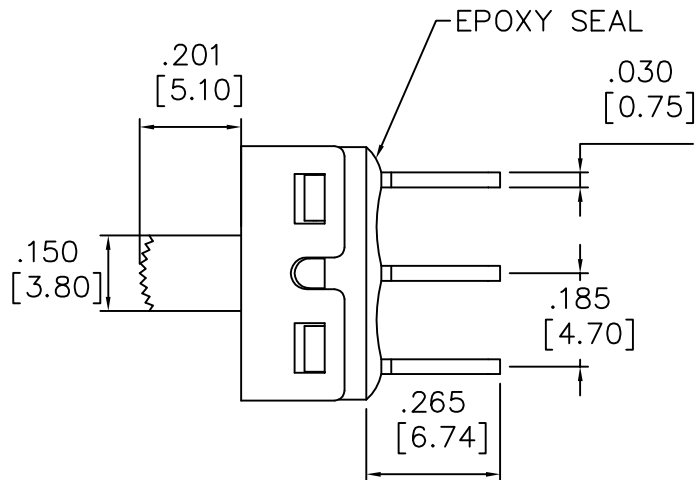


勝特力電材超市-龍山店 886-3-5773766
勝特力電材超市-光復店 886-3-5729570
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
<http://www.100y.com.tw>



SPECIFICATIONS:

- 1.MOVABLE CONTACT: Copper alloy, silver plated
- 2.TERMINALS: Copper alloy, silver plated
- 3.RATING: 5Amps with resistive load @ 125VAC or 28VDC
2Amps with resistive load @ 250VAC
- 4.CONTACT RESISTANCE: 10m-ohms max. initial
- 5.INSULATION RESISTANCE: 1,000M-ohms min.
- 6.DIELECTRIC STRENGTH: 1,500V RMS @ sea level
- 7.ELECTRICAL LIFE: 50,000 make and break cycles at full load
- 8.OPERATING TEMPERATURE: -30°C to 85°C

ITEM NO.	500-SSP-3-S1/2M2QE
料 號	5MS3S120M2QE

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TAIWAY ELECTRONICS LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF TAIWAY ELECTRONICS LTD.	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: ±1.0°	
DIMENSIONS	TOLERANCE
0.00 TO 10.00mm	±0.20mm
10.01 TO 20.00mm	±0.25mm
20.01 TO 25.00mm	±0.30mm
25.01 TO	±0.40mm

MATERIAL

Model No.	Switching Position		
	ON	NONE	ON
SSP-1	ON	NONE	ON
SSP-2	ON	NONE	(ON)
SSP-3	ON	OFF	ON
Term. Comm.	2-1	OPEN	2-3

USED	500
FINISH	
SCALE	2.5/1
比例	單位 mm
TITLE	SLIDE SWITCH
DWG NO.	500-SSP-3-S1/2M2QE
圖號	
FILE NAME	5MS312QE.dwg
檔案名稱	

SHEET	1/1
張	
REV.	4
更改	