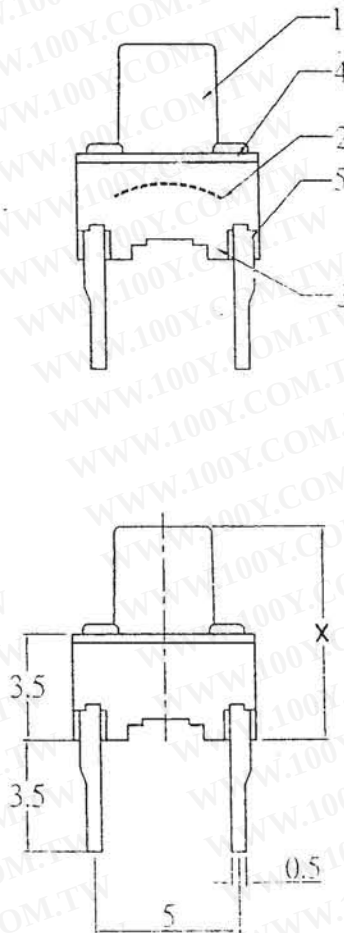

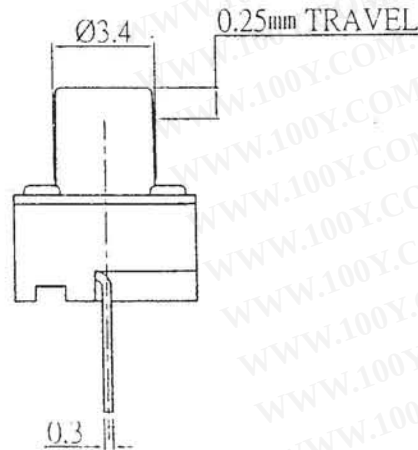



7				
6				
5	TERMINAL	BRASS	2	Ag COATING
4	COVER	SPN STRIP	1	Ni COATING
3	CASE	PA66	1	BLACK
2	CONTACT	C5210R-EH	1	Ag CLAD
1	STEM	PA66	1	GREY/WHITE/BLACK
NO.	PART NAME	MATERIAL	QTY	FINISHING

X= (height)	-	4.3 mm
	A	5 mm
	B	7 mm
	D	9.5 mm
	E	13 mm

1. Operating Force: 100,130,160,250±50 gf
2. Rating : DC12V 50mA.
3. Contact Resistance: 100 mΩ Max.
4. Operating Life: 100,000 cycles
5. Travel: 0.25 ±0.1mm
6. General Tolerance: ±0.3mm

NO	TITLE	MATERIAL	TREATMENT	SPECIFICATION	EA	REFERENCE
4			UNIT	SCALE 7	TITLE	TACT SWITCH
5			MM	1		
2			APPROVAL	CHECK DESIGN	PART NO.	HTS-6604HTX-B
1						
MARK DATE		CHECK	DESIGN	PARK SNAG JIN		

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)