

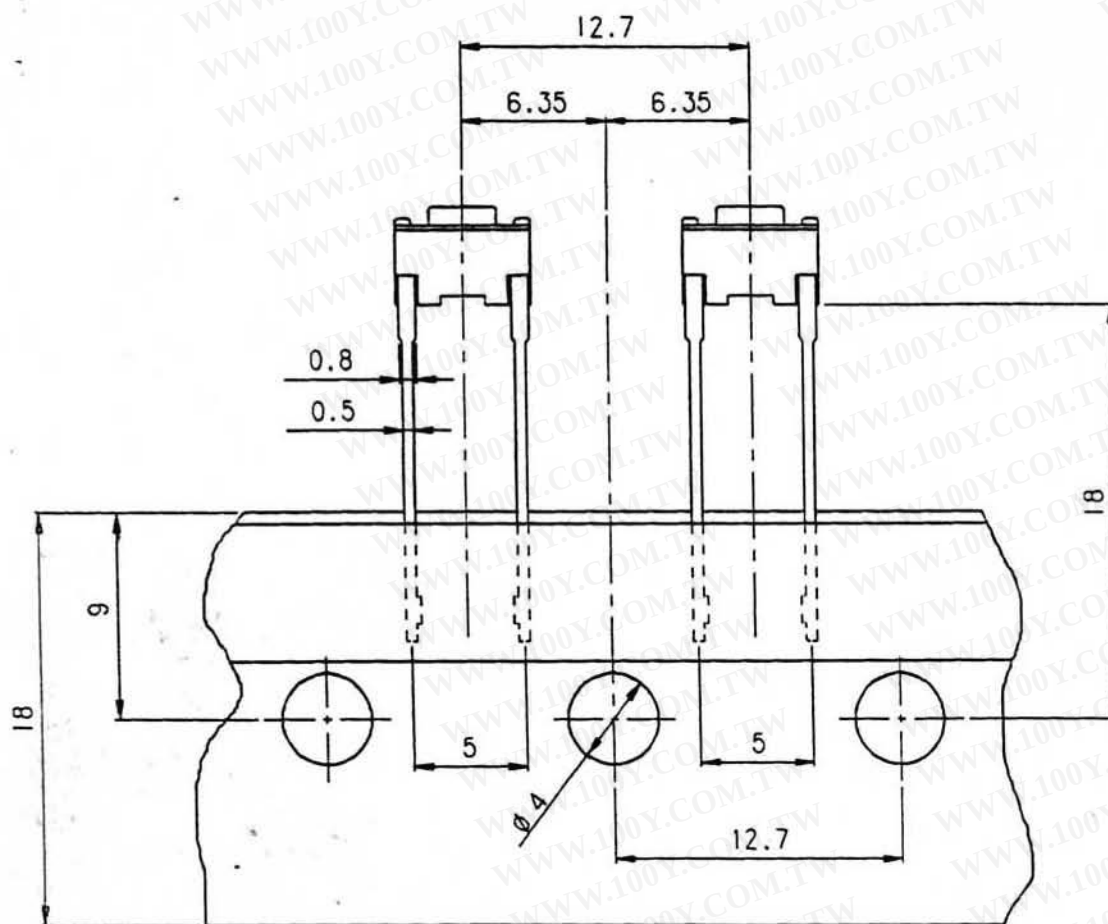
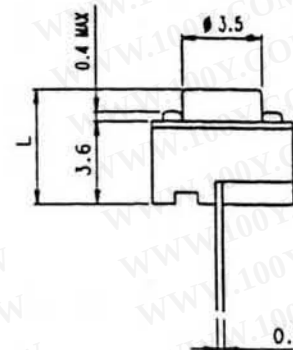


P.C.B MOUNTING DIMENSIONS

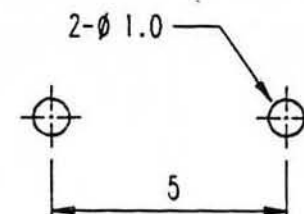

CIRCUIT DIAGRAM



1. OPERATING FORCE : 130, 160, 250 $\pm$ 50gf
2. TRAVEL : 0.25 $\pm$ 0.1mm
3. CONTACT RESISTANCE : 100m Ω MAX
4. RATING : DC12V 50mA MAX
5. OPERATING LIFE : 100,000 CYCLES
6. GENERAN TOLERANCE : $\pm$ 0.3
7. PACKING QUANTITY : 1,000 PCS

P/N	HT	HTA	HTB	HTC	HTD
L	4.3	5.0	7.0	8.0	9.5

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

NO	TITLE	MATERIAL	TREATMENT	SPECIFICATION	EA	REFERENCE
△			UNIT	SCALE 3/1	TITLE	RADIAL TYPE TACT S/W
△			mm			
△			APPROVAL	CHECK	DESIGN	PART NAME
△						HTS 6604HTX
MARK	DATE	CHECK	DESIGN	2000.02.10	PARK SANG JIN	