

HONEYWELL
PART NUMBER


311SX1-T

PRODUCT CODE

VDS0010

REV	DOCUMENT	CHANGED BY	CHECK
12	0038558	SS 08MAY08	BLR

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

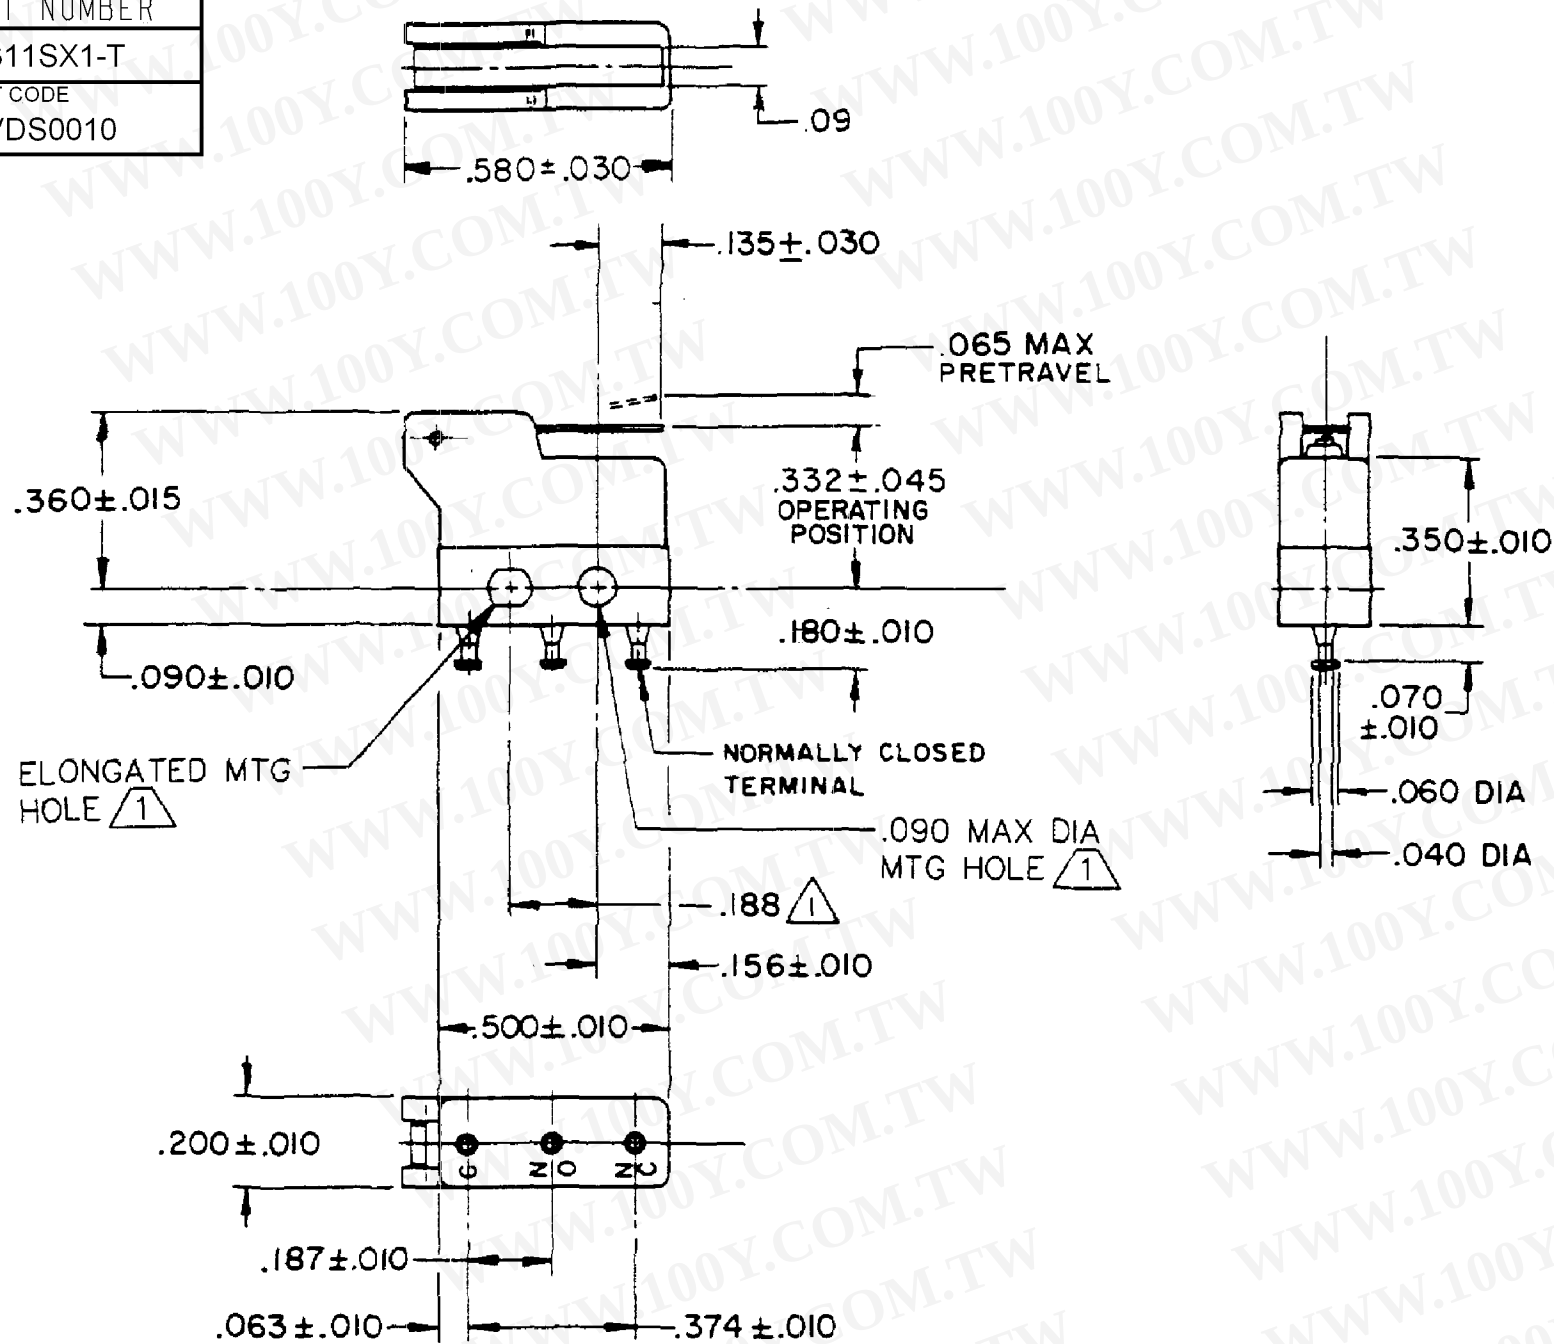

NOTE-

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .087 MAX DIA ON .188 ± .002 CENTERS
2 - TERMINALS ARE PLATED FOR SOLDERING
3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250° F

RELEASE NO.
PR-861REPLACES
X41461-SX

CHARACTERISTICS

OPERATING FORCE - - -50 GRAM MAX

RELEASE FORCE - - - 9 GRAM MIN

DIFFERENTIAL TRAVEL - - .020 MAX

OVERTRAVEL - - - - .014 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SPDT

28 VOLTS DC RATING 115 VOLTS AC, 60 CPS

SEA LEVEL 50,000 FT SEA LEVEL

INDUCTIVE 3 AMP 2 AMP 5 AMP

RESISTIVE 5 AMP 4 AMP 5 AMP

KEMA, CE 5A 250 V - T125 5E4

UL, CSA 5A 250 VAC

DESIGN UNITS: INCH

TOLERANCES UNLESS NOTED:

NO PLACE X ±

ONE PLACE .X ±

TWO PLACE .XX ±

THREE PLACE .XXX ±

FOUR PLACE .XXXX ±

ANGLES ±

THIRD ANGLE PROJECTION



DRAWN

SPK

25FEB08

CHECK

RJ

25FEB08

THIS DRAWING COVERS A PROPRIETARY ITEM
AND IS THE PROPERTY OF HONEYWELL.
THIS DRAWING IS NOT TO BE COPIED OR USED
WITHOUT THE PERMISSION OF HONEYWELL.

INTERPRET PER ANSI Y14.5M-1982
OTHER HONEYWELL ENGINEERING
STANDARDS MAY APPLY

RASTER

Honeywell

TITLE

SWITCH - BASIC

SIZE

TYPE

DRAWING NAME

REV

B

I

311SX1-T

12

SCALE

-

WEIGHT: .003 LB MAX

SHEET 1 OF 1